


JOB NAME ENGINEER CONTRACTOR TAG

SUBMITTAL SHEET

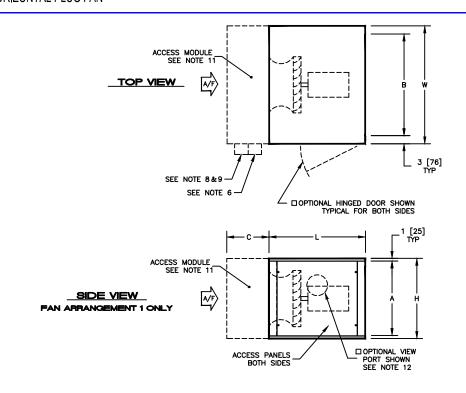

SIZE	н	w	L	LEAVING AIR OPENING		MIN. REQUIRED ACCESS MODULE (SEE NOTE)	ACCESS PANEL H X W	WEIGHT (SEE NOTES)	
				Α	В	С		SINGLE WALL LBS (kg)	DOUBLE WALL LBS (kg)
02	22	30	32	20	24	15	20 X 26	120	150
	[559]	[762]	[813]	[508]	[610]	[381]	[508 X 660]	[54]	[65]
03	22	36	32	20	30	15	20 X 26	135	165
	[559]	[914]	[813]	[508]	[762]	[381]	[508 X 660]	[61]	[74]
04	22	44	32	20	38	15	20 X 26	150	180
	[559]	[1118]	[813]	[508]	[965]	[381]	[508 X 660]	[68]	[81]
06	30	44	36	28	38	30	28 X 30	180	225
	[762]	[1118]	[914]	[711]	[965]	[762]	[711 X 762]	[81]	[101]
08	34	48	36	32	42	30	32 X 30	200	255
	[864]	[1219]	[914]	[813]	[1067]	[762]	[813 X 762]	[90]	[115]
10	34	58	36	32	52	30	32 X 30	225	280
	[864]	[1473]	[914]	[813]	[1321]	[762]	[813 X 762]	[101]	[126]
12	44	66	40	42	60	30	42 X 34	265	345
	[1118]	[1676]	[1016]	[1067]	[1524]	[762]	[1067 X 864]	[119]	[155]
14	44	70	40	42	64	30	42 X 34	275	355
	[1118]	[1778]	[1016]	[1067]	[1626]	[762]	[1067 X 864]	[124]	[160]
17	44	82	40	42	76	30	42 X 34	290	390
	[1118]	[2083]	[1016]	[1067]	[1630]	[762]	[1067 X 864]	[131]	[176]

NOTES:

1. ALL DIMENSIONS ARE INCHES [MM]

2. ALL DIMENSIONS ARE ±1/8" [3]

3. METRIC VALUES ARE SOFT CONVERSION

4. ALL DRAWINGS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

5. MOTOR WEIGHT IS NOT INCLUDED; SEE SUBMITTAL AHMS04-FN04 FOR MOTOR WEIGHT

6. CONTROL ENCLOSURE CAN BE LOCATED ON EITHER RIGHT OR LEFT SIDE OF UNIT; RIGHT HAND UNIT SHOWN

7. PANEL WITH CONTROL ENCLOSURE IS NOT REMOVABLE OR HINGED

8. VFD WILL BE LOCATED ON THE SAME SIDE OF THE UNIT AS CONTROL ENCLOSURE

9. VFD SHALL BE MOUNTED ADJACENT TO OR AS CLOSE TO CONTROL ENCLOSURE AS POSSIBLE, DEPENDING UPON UNIT SIZE

10. FAN AND MOTOR ACCESS AVAILABLE ON EITHER SIDE

11. TO ENSURE PROPER FAN PERFORMANCE, AN ACCESS MODULE IS REQUIRED UPSTREAM OF THE PLUG FAN

12. A) OPTIONAL VIEWPORT IS ONLY AVAILABLE WITH DOUBLE WALL OPTION

B) OPTIONAL VIEWPORT IS 8" DIAMETER, DOUBLE PANE, CLEAR POLYCARBONATE, UV RESISTANT WITH BOTH INTERIOR AND EXTERIOR GASKETING 13. OPTIONAL HINGED DOOR IS REMOVABLE, BUST MUST BE OPENED 90 DEGREES FOR REMOVAL

Revision Date: 11/14 Form: AHMS04-FN03 Rep	Replaces: NEW
--	---------------