


LMHS-VP

SINGLE DUCT WITH VALVE PACKAGE WATER COILS

SUBMITTAL SHEET

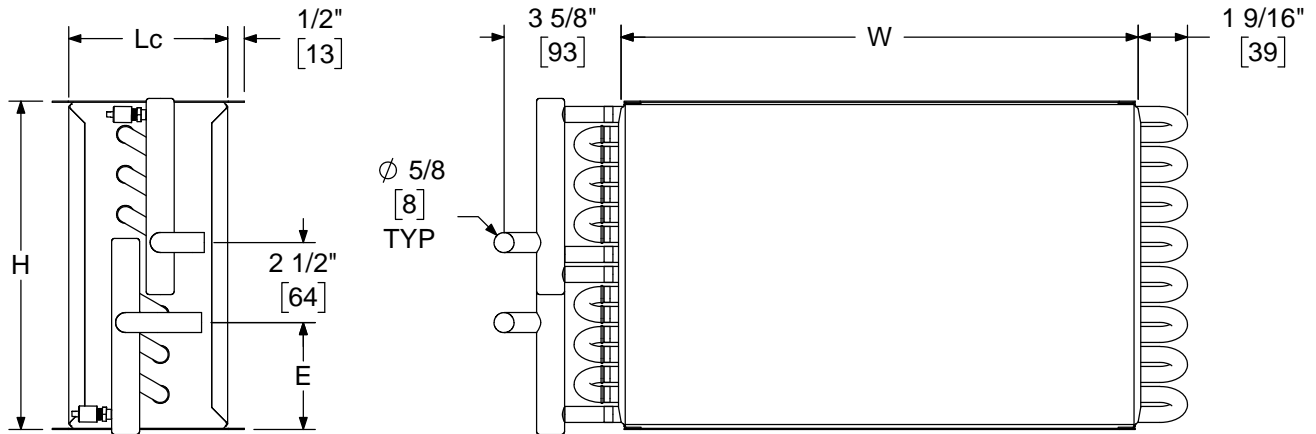

DIMENSIONS ARE GIVEN AS INCHES [MM]

STANDARD FEATURES:

- Shipped from factory attached to the unit discharge
- Slip and drive field duct work installation
- Coil section is uninsulated
- Coil Casing - 20 Ga. Galvanized Steel
- Connection Tubing – 0.032" thick copper
- Coil Tubing – 1/2" diameter x 0.016" thick copper
- Coil Fins – 0.0045" thick aluminum, 10 FPI, mechanically bonded to tubing
- Air vent & drain

OPTIONAL FEATURES:

- Coil Fins – 12 FPI

Inlet Size	Number of Rows	H	W	Lc	E
4,5,6	1	7 7/8 [200]	12 [305]	5 [127]	2 3/16 [56]
	2	7 7/8 [200]	12 [305]	5 [127]	2 3/16 [56]
	3	7 7/8 [200]	12 [305]	7 1/4 [184]	2 3/16 [56]
	4	7 7/8 [200]	12 [305]	7 1/4 [184]	2 3/16 [56]
7,8	1	10 1/4 [260]	12 [305]	5 [127]	3 3/16 [82]
	2	10 1/4 [260]	12 [305]	5 [127]	3 3/16 [82]
	3	10 1/4 [260]	12 [305]	7 1/4 [184]	3 3/16 [82]
	4	10 1/4 [260]	12 [305]	7 1/4 [184]	3 3/16 [82]
9,10	1	12 3/4 [324]	14 [356]	5 [127]	3 3/16 [82]
	2	12 3/4 [324]	14 [356]	5 [127]	3 3/16 [82]
	3	12 3/4 [324]	14 [356]	7 1/4 [184]	3 3/16 [82]
	4	12 3/4 [324]	14 [356]	7 1/4 [184]	3 3/16 [82]
12	1	15 1/4 [387]	16 [406]	5 [127]	3 3/16 [82]
	2	15 1/4 [387]	16 [406]	5 [127]	3 3/16 [82]
	3	15 1/4 [387]	16 [406]	7 1/4 [184]	3 3/16 [82]
	4	15 1/4 [387]	16 [406]	7 1/4 [184]	3 3/16 [82]
14	1	17 3/4 [451]	20 [508]	7 1/2 [191]	3 3/16 [82]
	2	17 3/4 [451]	20 [508]	6 1/2 [165]	3 3/16 [82]
	3	17 3/4 [451]	20 [508]	9 3/4 [248]	3 3/16 [82]
	4	17 3/4 [451]	20 [508]	9 3/4 [248]	3 3/16 [82]
16	1	17 3/4 [451]	24 [610]	7 1/2 [191]	3 3/16 [82]
	2	17 3/4 [451]	24 [610]	6 1/2 [165]	3 3/16 [82]
	3	17 3/4 [451]	24 [610]	9 3/4 [248]	3 3/16 [82]
	4	17 3/4 [451]	24 [610]	9 3/4 [248]	3 3/16 [82]
20	1	10 1/4 [260]	16 [406]	5 [127]	3 3/16 [82]
	2	10 1/4 [260]	16 [406]	5 [127]	3 3/16 [82]
	3	10 1/4 [260]	16 [406]	7 1/4 [184]	3 3/16 [82]
	4	10 1/4 [260]	16 [406]	7 1/4 [184]	3 3/16 [82]
22	1	17 3/4 [451]	38 [965]	5 [127]	3 3/16 [82]
	2	17 3/4 [451]	38 [965]	5 [127]	3 3/16 [82]
	3	17 3/4 [451]	38 [965]	7 1/4 [184]	3 3/16 [82]
	4	17 3/4 [451]	38 [965]	7 1/4 [184]	3 3/16 [82]