


KHG - SERIES A

Horizontal | High Capacity



DIMENSIONAL DATA | KHGE | EXTERNAL SPACE REQUIREMENTS

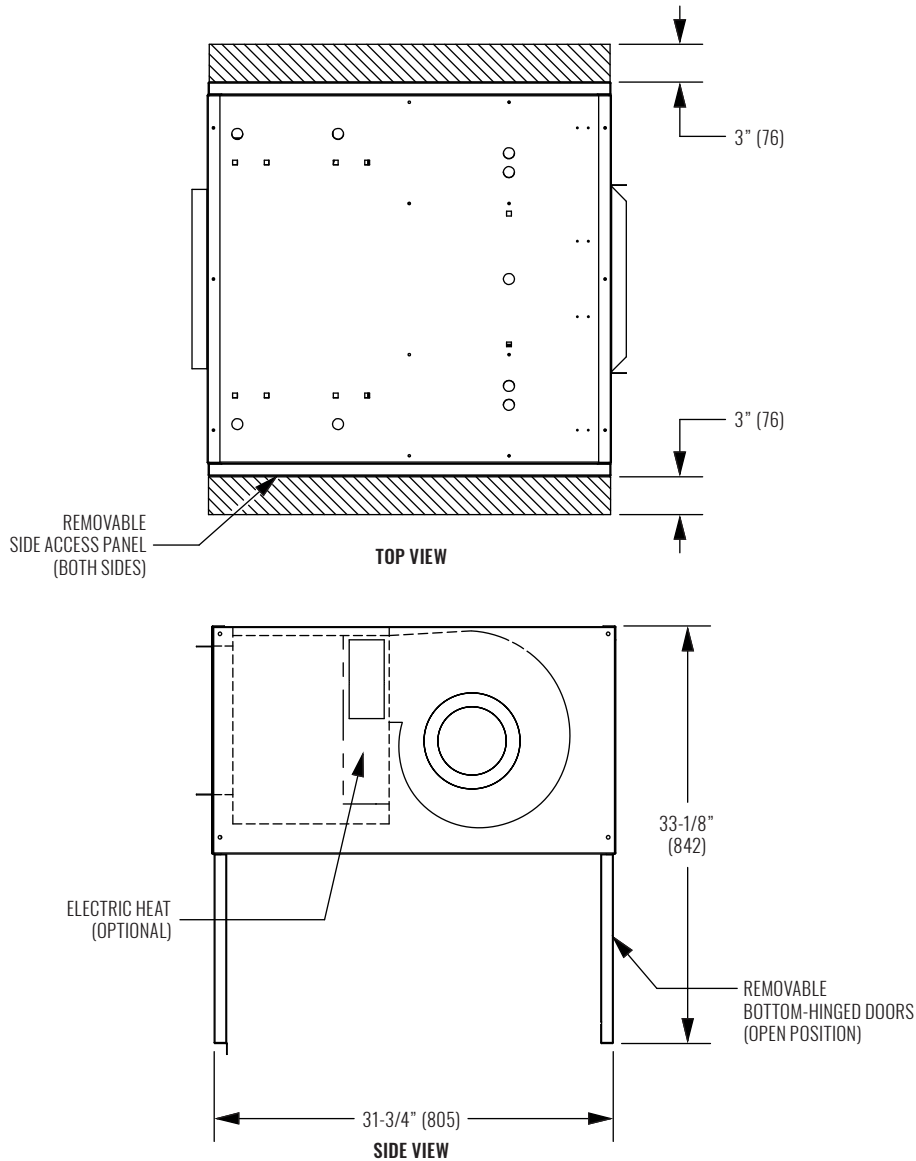

NOTES:



1. All chilled water piping that projects beyond the condensate pan or the optional auxiliary drip pan must be field insulated by others.
2. Optional auxiliary drip pan (not shown) is mounted on the outlet side of the drain pan.
3. Drain pan is installed with the outlet tube(s) on cooling coil connection end of coil on 4-pipe units with optional opposite end connection.
4. Dimensions shown on this drawing apply to standard CW and HW valve packages. Refer to Piping Details for more information. Contact factory for details on valve packages using non-standard or customer furnished components.
5. Provide sufficient clearance to access electrical components and comply with all applicable codes and ordinances.
6. Drawings not for installation purposes. Refer to unit and size-specific submittal drawings for installation.
7. All dimensions in inches (millimeters). Metric values are soft conversion.

KHG - SERIES A

Horizontal | High Capacity



DIMENSIONAL DATA | KHGE | DUCTED FRONT, REAR RETURN

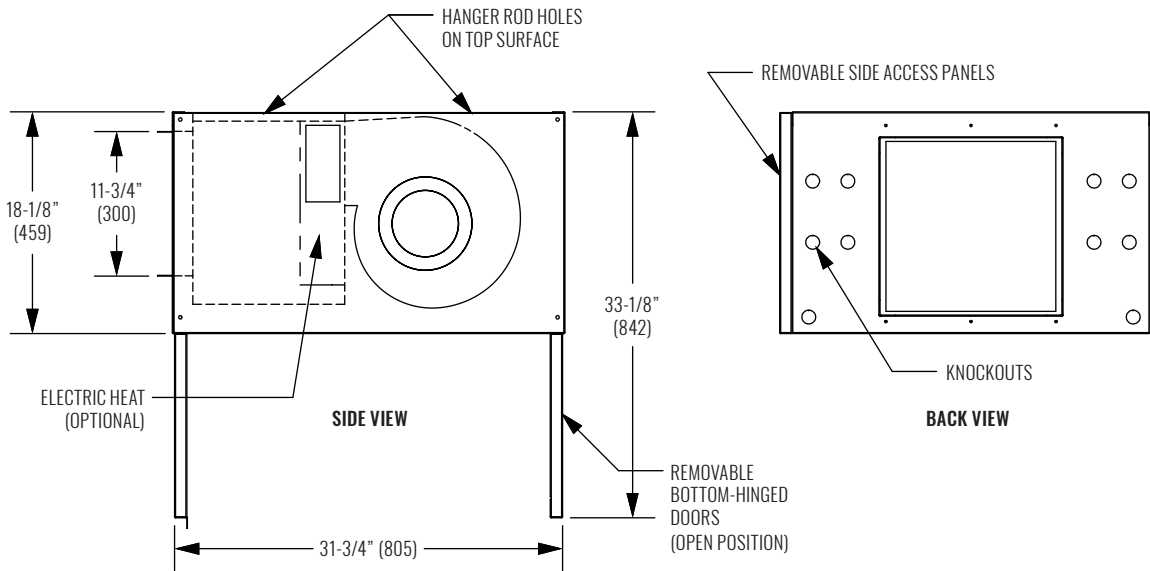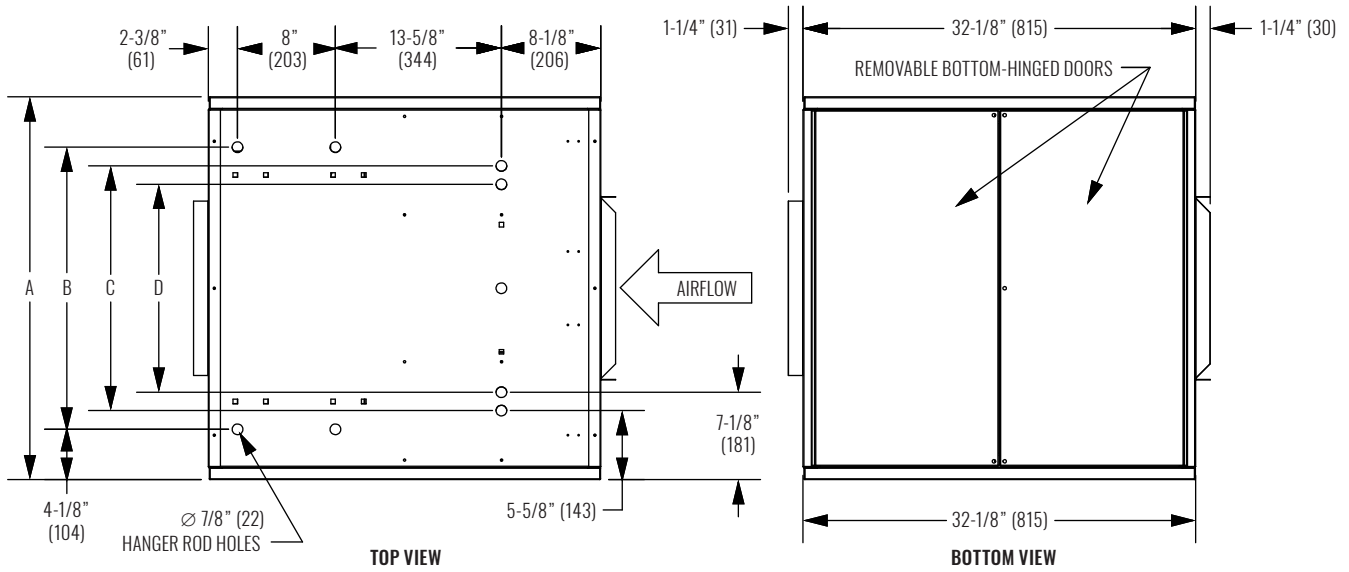

UNIT SIZE	A	B	C	D	A + 6.0\"/>
06	31-1/4\"/>				
08	36-1/4\"/>				
10	40-1/4\"/>				
12	45-1/4\"/>				
14	50-1/4\"/>				
16	55-1/4\"/>				
18	60-1/4\"/>				
20	64-1/4\"/>				


NOTES:

1. All dimensions $\pm 1/4$ " (6mm). Metric values are soft conversion.
2. Right hand unit shown, left hand unit opposite.
3. Standard control enclosure is mounted on unit side opposite cooling coil connections and includes (4) knockouts on (2) sides. Provide sufficient clearance to access electrical controls and comply with applicable codes and ordinances.


FAN COIL UNITS | HORIZONTAL, HIGH CAPACITY

KHG - SERIES A


DIMENSIONAL DATA | KHGE | GRILLED/DUCTED SUPPLY, GRILLED/DUCTED REAR RETURN

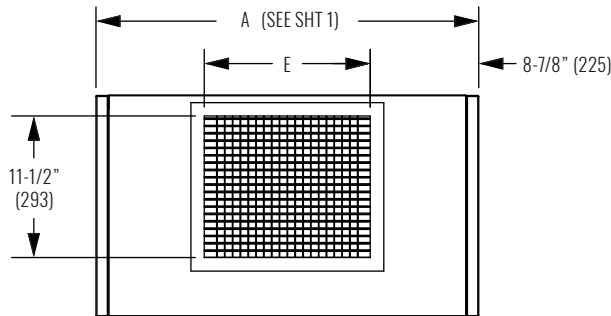


**FRONT PANEL
GRILLED SUPPLY**

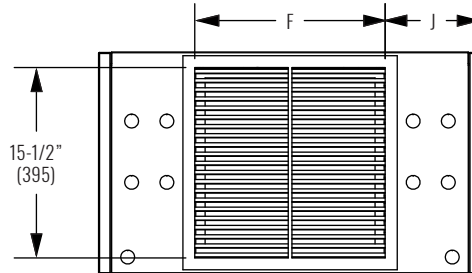


**BACK PANEL
GRILLED RETURN**

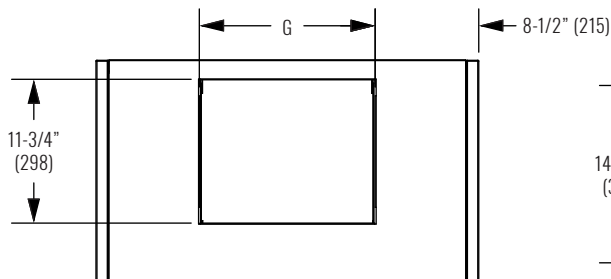

**FRONT PANEL
DUCTED SUPPLY**

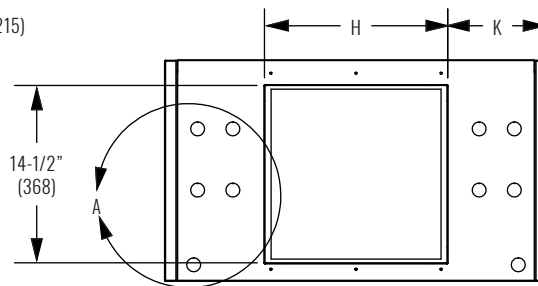

**BACK PANEL
DUCTED RETURN**

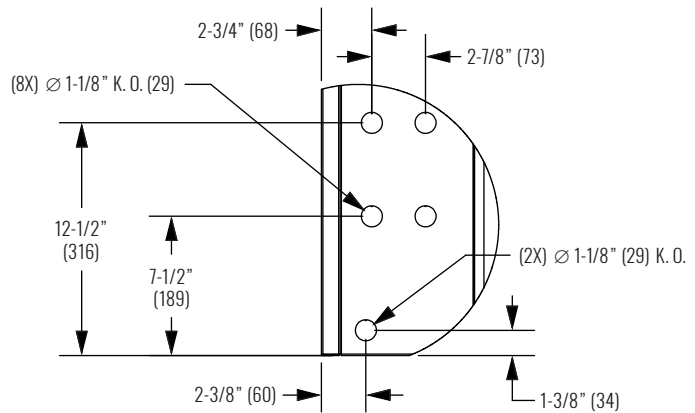

DETAIL A

UNIT SIZE	E	F	G	H	J	K
06	13-1/2" (344)	15-1/2" (394)	14-3/8" (365)	17" (381)	7-7/8" (200)	8-1/4" (208)
08	17-1/2" (445)	19-1/2" (495)	19-3/8" (492)	19" (483)	8-3/8" (213)	8-3/4" (222)
10	22-1/2" (572)	24-1/2" (622)	23-3/8" (594)	24" (610)	7-7/8" (200)	8-1/4" (208)
12	29-1/2" (749)	31-1/2" (800)	28-3/8" (721)	31" (787)	6-7/8" (175)	7-1/4" (184)
14	33-1/2" (851)	35-1/2" (902)	33-3/8" (848)	35" (889)	7-3/8" (187)	7-3/4" (197)
16	37-1/2" (953)	39-1/2" (1003)	38-3/8" (975)	39" (991)	7-7/8" (200)	8-1/4" (208)
18	42-1/2" (1080)	44-1/2" (1130)	43-3/8" (1102)	44" (1118)	7-7/8" (200)	8-1/4" (208)
20	47-1/2" (1207)	49-1/2" (1257)	47-3/8" (1203)	49" (1245)	7-3/8" (187)	7-3/4" (197)

NOTES:


- All dimensions in inches (millimeters). All dimensions $\pm 1/4"$ (6mm). Metric values are soft conversion.
- Right hand unit shown, left hand unit opposite.
- Standard control enclosure is mounted on unit side opposite cooling coil connections and includes (4) knockouts on (2) sides. Provide sufficient clearance to access electrical controls and comply with applicable codes and ordinances.

KHG - SERIES A


Horizontal | High Capacity




DIMENSIONAL DATA | KHGE | GRILLED/DUCTED SUPPLY, GRILLED/DUCTED REAR RETURN, EXTENDED HOUSING

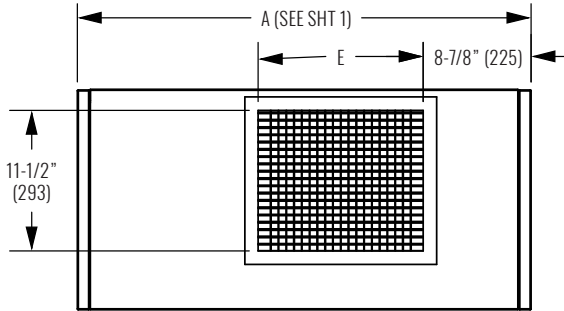


EXTENDED FRONT PANEL
GRILLED SUPPLY

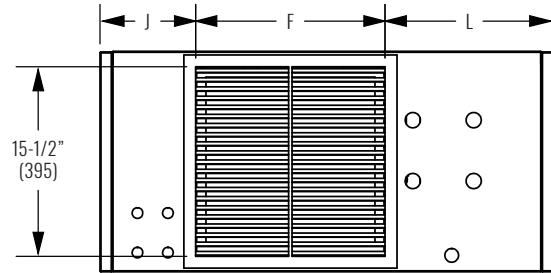


EXTENDED BACK PANEL
GRILLED SUPPLY

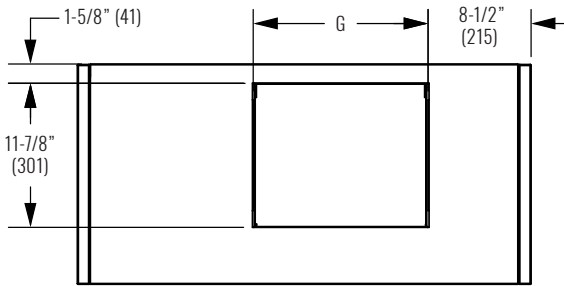


EXTENDED FRONT PANEL
DUCTED SUPPLY

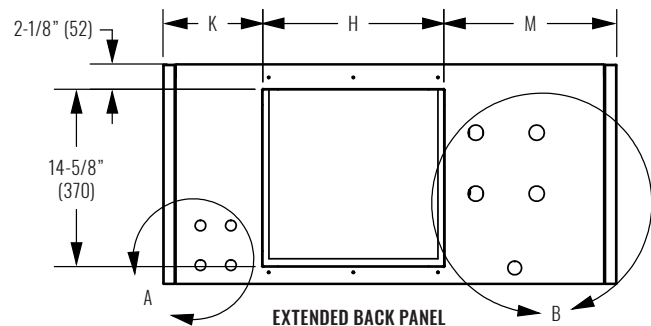

EXTENDED BACK PANEL
DUCTED SUPPLY

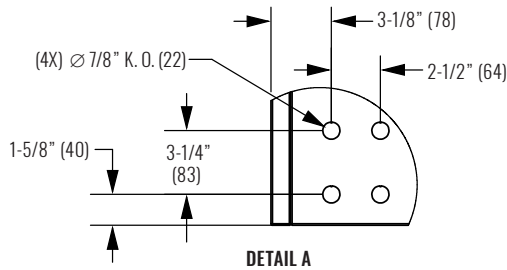

DETAIL A

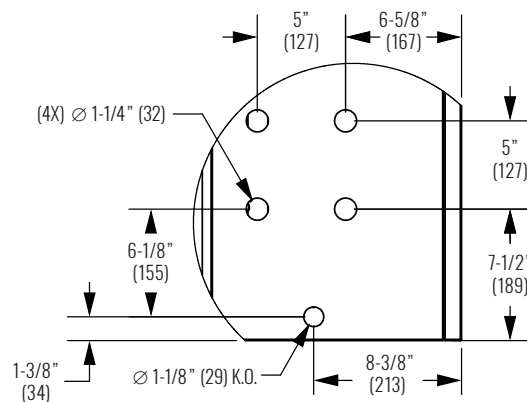


DETAIL B

NOTES:


- All dimensions in inches (millimeters). All dimensions $\pm 1/4"$ (6mm). Metric values are soft conversion.
- Right hand unit shown, left hand unit opposite.
- Standard control enclosure is mounted on unit side opposite cooling coil connections and includes (4) knockouts on (2) sides. Provide sufficient clearance to access electrical controls and comply with applicable codes and ordinances.

UNIT SIZE	E	F	G	H	J	K	L	M
06	13-1/2" (344)	15-1/2" (394)	14-3/8" (365)	15" (381)	7-7/8" (200)	8-1/4" (208)	13-7/8" (352)	14-1/4" (362)
08	17-1/2" (445)	19-1/2" (495)	19-3/8" (492)	19" (483)	8-3/8" (213)	8-3/4" (222)	14-3/8" (365)	14-3/4" (375)
10	22-1/2" (572)	24-1/2" (622)	23-3/8" (594)	24" (610)	7-7/8" (200)	8-1/4" (208)	13-7/8" (352)	14-1/4" (362)
12	29-1/2" (749)	31-1/2" (800)	28-3/8" (721)	31" (787)	6-7/8" (175)	7-1/4" (184)	12-7/8" (327)	13-1/4" (337)
14	33-1/2" (851)	35-1/2" (902)	33-3/8" (848)	35" (889)	7-3/8" (187)	7-3/4" (197)	13-3/8" (340)	13-3/4" (349)
16	37-1/2" (953)	39-1/2" (1003)	38-3/8" (975)	39" (991)	7-7/8" (200)	8-1/4" (208)	13-7/8" (352)	14-1/4" (362)
18	42-1/2" (1080)	44-1/2" (1130)	43-3/8" (1102)	44" (1118)	7-7/8" (200)	8-1/4" (208)	13-7/8" (352)	14-1/4" (362)
20	47-1/2" (1207)	44-1/2" (1130)	47-3/8" (1203)	49" (1245)	9-7/8" (251)	7-3/4" (197)	15-7/8" (403)	13-3/4" (349)


DIMENSIONAL DATA | KHGE | GRILLED/DUCTED SUPPLY, GRILLED BOTTOM RETURN

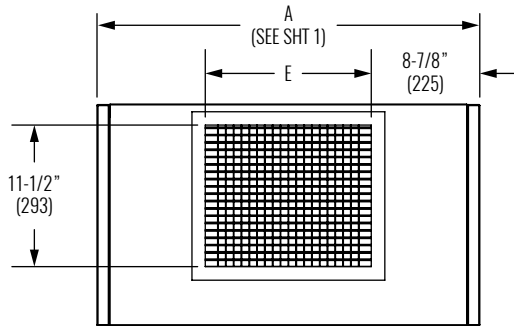


FRONT PANEL - GRILLED SUPPLY

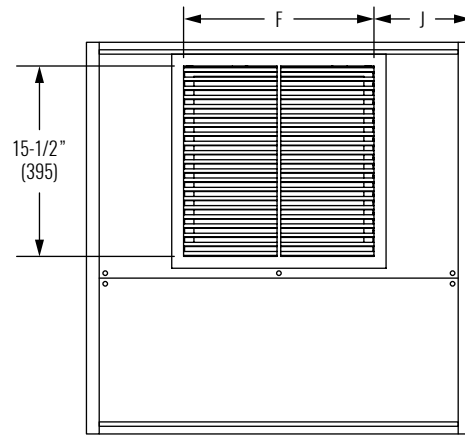


BOTTOM PANEL - GRILLED RETURN

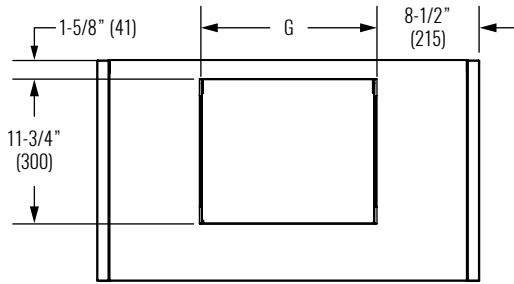

FRONT PANEL - DUCTED SUPPLY

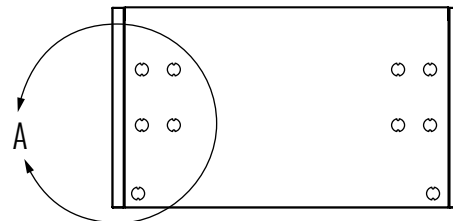

BACK PANEL

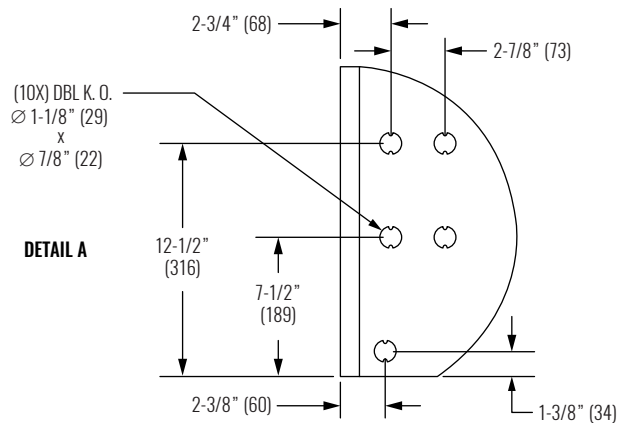

UNIT SIZE	E	F	G	J
06	13-1/2" (344)	15-1/2" (394)	14-3/8" (365)	7-7/8" (200)
08	17-1/2" (445)	19-1/2" (495)	19-3/8" (492)	8-3/8" (213)
10	22-1/2" (572)	24-1/2" (622)	23-3/8" (594)	7-7/8" (200)
12	29-1/2" (749)	31-1/2" (800)	28-3/8" (721)	6-7/8" (175)
14	33-1/2" (851)	35-1/2" (902)	33-3/8" (848)	7-3/8" (187)
16	37-1/2" (953)	39-1/2" (1003)	38-3/8" (975)	7-7/8" (200)
18	42-1/2" (1080)	44-1/2" (1130)	43-3/8" (1102)	7-7/8" (200)
20	47-1/2" (1207)	44-1/2" (1130)	47-3/8" (1203)	9-7/8" (251)

NOTES:


1. All dimensions in inches (millimeters). All dimensions $\pm 1/4"$ (6mm). Metric values are soft conversion.
2. Right hand unit shown, left hand unit opposite.
3. Standard control enclosure is mounted inside unit opposite cooling coil connections and includes (4) knockouts on (2) sides. Provide sufficient clearance to access electrical controls and comply with applicable codes and ordinances.

KHG - SERIES A


Horizontal | High Capacity




DIMENSIONAL DATA | KHGE | GRILLED/DUCTED SUPPLY, GRILLED BOTTOM RETURN, EXTENDED HOUSING

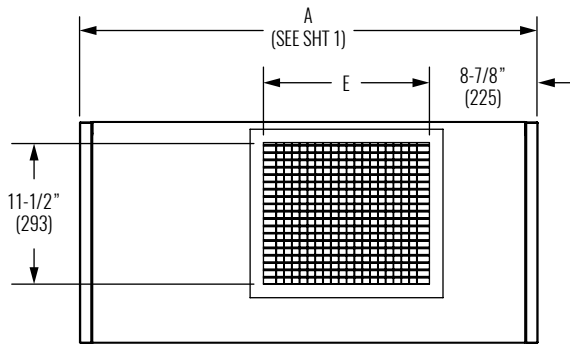


EXTENDED FRONT PANEL - GRILLED SUPPLY

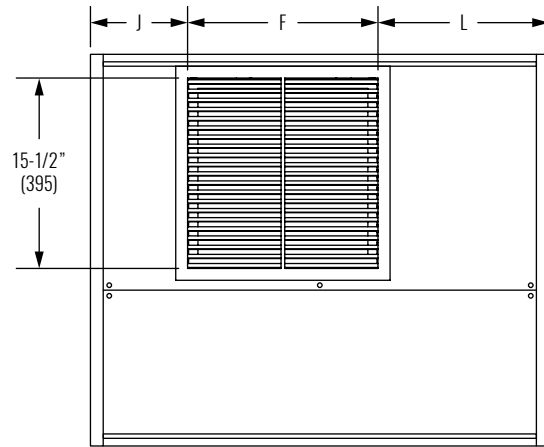


EXTENDED BOTTOM PANEL - GRILLED RETURN

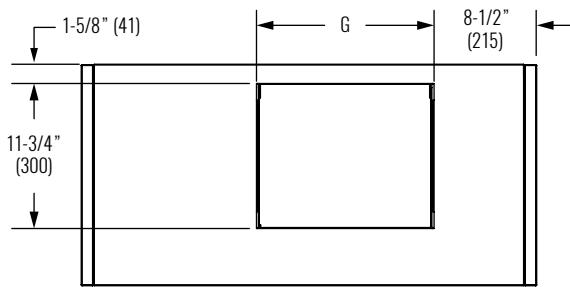


EXTENDED FRONT PANEL - DUCTED SUPPLY

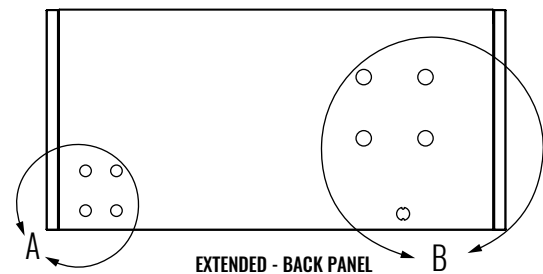

EXTENDED - BACK PANEL

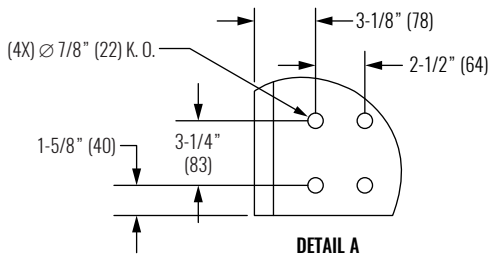

DETAIL A

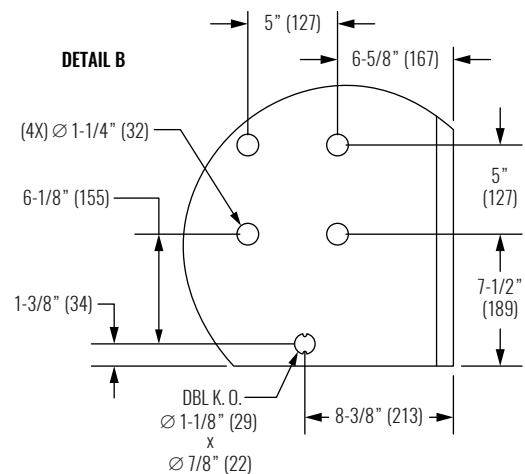



DETAIL B

NOTES:

- All dimensions in inches (millimeters). All dimensions $\pm 1/4$ " (6mm). Metric values are soft conversion.
- Right hand unit shown, left hand unit opposite.
- Standard control enclosure is mounted inside unit opposite cooling coil connections and includes (4) knockouts on (2) sides. Provide sufficient clearance to access electrical controls and comply with applicable codes and ordinances.
- Extended cabinet is only offered when 3-way valve package is selected.

UNIT SIZE	E	F	G	H	J	K	L	M
06	13-1/2" (344)	15-1/2" (394)	14-3/8" (365)	15" (381)	7-7/8" (200)	8-1/4" (208)	13-7/8" (352)	14-1/4" (362)
08	17-1/2" (445)	19-1/2" (495)	19-3/8" (492)	19" (483)	8-3/8" (213)	8-3/4" (222)	14-3/8" (365)	14-3/4" (375)
10	22-1/2" (572)	24-1/2" (622)	23-3/8" (594)	24" (610)	7-7/8" (200)	8-1/4" (208)	13-7/8" (352)	14-1/4" (362)
12	29 1/2" (749)	31-1/2" (800)	28-3/8" (721)	31" (787)	6-7/8" (175)	7-1/4" (184)	12-7/8" (327)	13-1/4" (337)
14	33-1/2" (851)	35-1/2" (902)	33-3/8" (848)	35" (889)	7-3/8" (187)	7-3/4" (197)	13-3/8" (340)	13-3/4" (349)
16	37-1/2" (953)	39-1/2" (1003)	38-3/8" (975)	39" (991)	7-7/8" (200)	8-1/4" (208)	13-7/8" (352)	14-1/4" (362)
18	42-1/2" (1080)	44-1/2" (1130)	43-3/8" (1102)	44" (1118)	7-7/8" (200)	8-1/4" (208)	13-7/8" (352)	14-1/4" (362)
20	47-1/2" (1207)	44-1/2" (1130)	47-3/8" (1203)	49" (1245)	9-7/8" (251)	7-3/4" (197)	15-7/8" (403)	13-3/4" (349)

DIMENSIONAL DATA | KHGE | FIELD CONNECTIONS, 2-PIPE

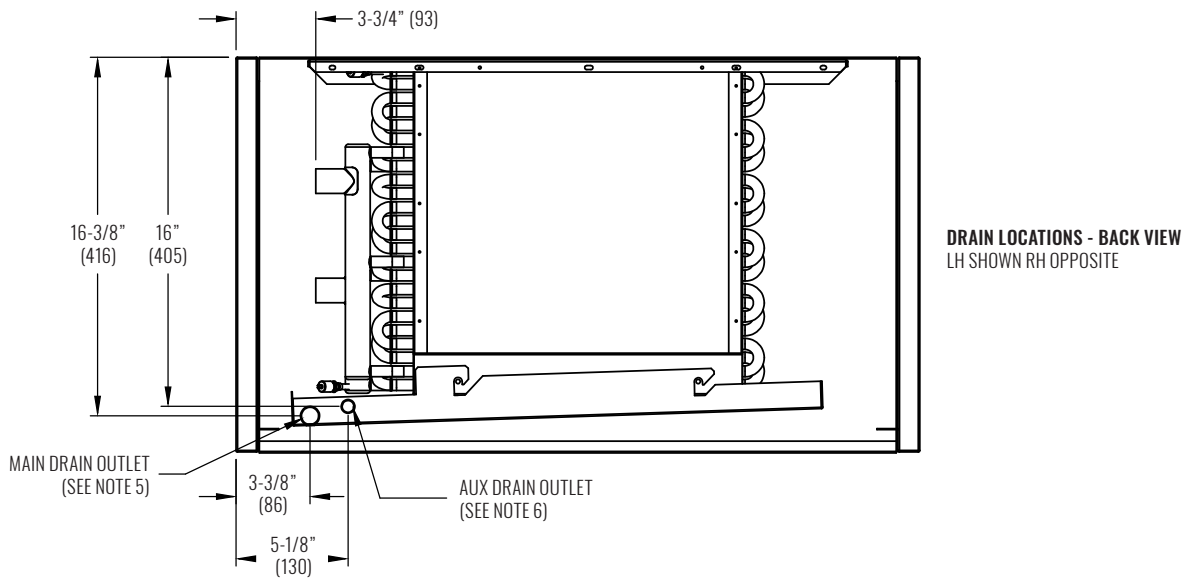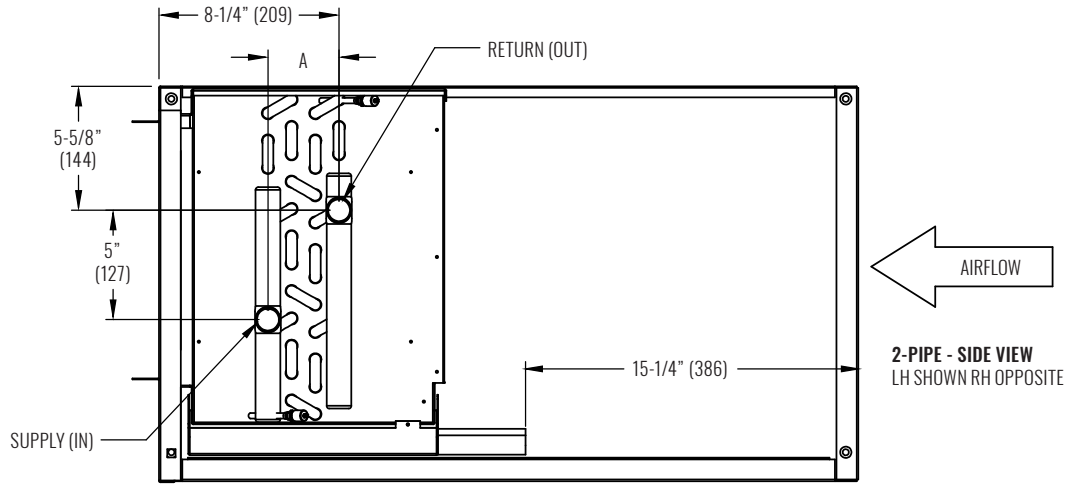

UNIT SIZE	COIL ROWS	A	
		(1/2" Ø COIL)	(3/8" Ø COIL)
2-PIPE HEATING	1	1-1/8" (29) *	7/8" (22) *
	2	1-1/8" (29)	7/8" (22)
	3	2-1/8" (54)	1-3/4" (44)
	4	3-1/4" (83)	2-5/8" (67)
2-PIPE COOLING	3	2-1/8" (54)	1-3/4" (44)
	4	3-1/4" (83)	2-5/8" (67)
	6	5-3/8" (137)	4-3/8" (86)

NOTES:


1. All dimensions in inches (millimeters). All dimensions ±1/2" (13mm). Metric values are soft conversion.
 2. All drawings subject to change without notice.
 3. Model "KHGE" unit shown, side panel hidden for clarity.
 4. Connection Size: See submittal.
 5. Standard externally foam coated galvanize steel drain pan has 7/8" ODM copper outlet. Stainless steel drain pan has 3/4" MPT galvanize steel outlet.
 6. Auxiliary drain outlet is 5/8" ODM copper or 3/8" MPT galvanized steel respectively.
- * Single row / single circuit headers are vertical (horizontal distance is 0").

KHG - SERIES A

Horizontal | High Capacity



DIMENSIONAL DATA | KHGE | FIELD CONNECTIONS, 4-PIPE, 1/2" COIL, REHEAT

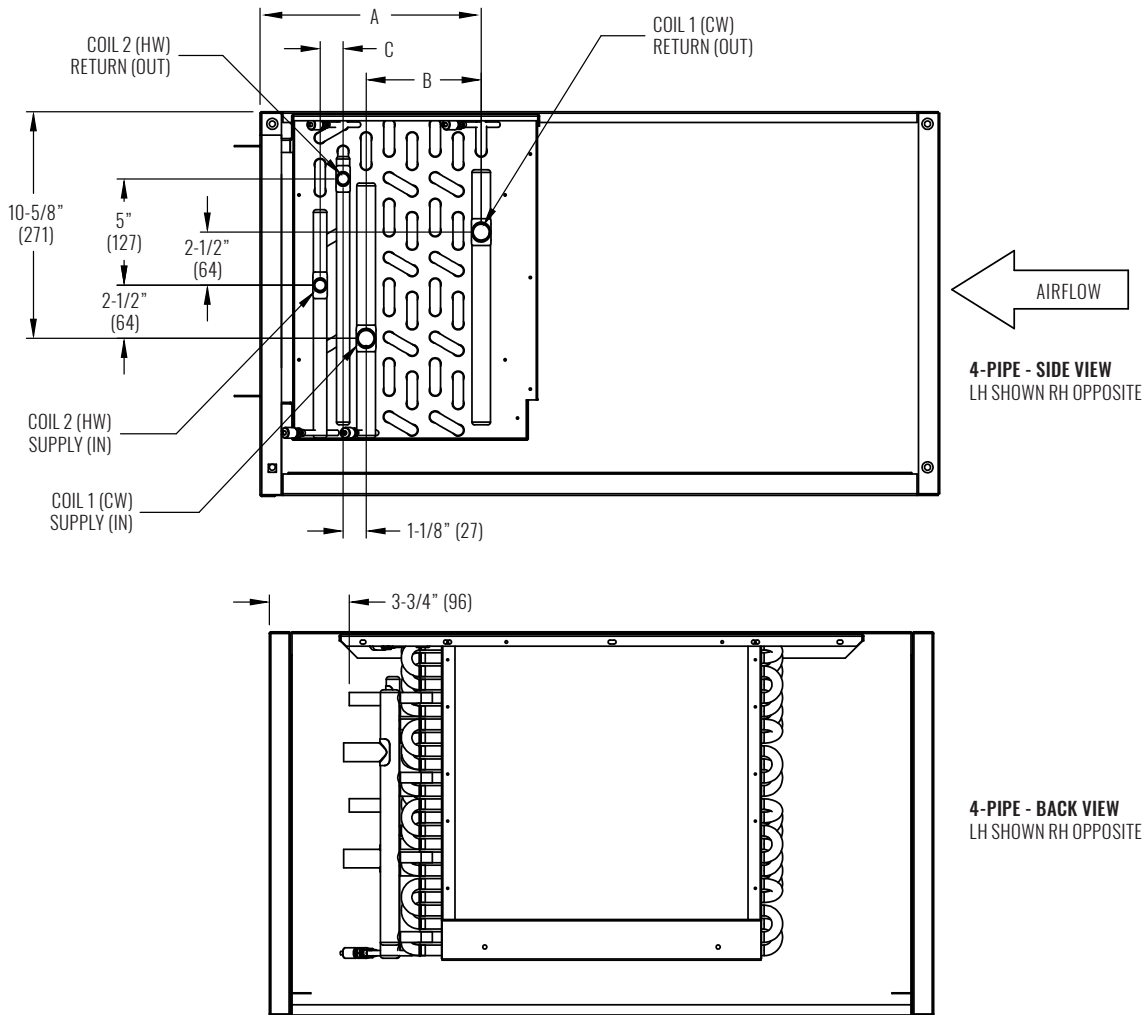

FAN COIL UNITS | HORIZONTAL, HIGH CAPACITY


KHG - SERIES A

UNIT TYPE: 4-PIPE REHEAT				
COIL 1 CW ROWS	COIL 2 HW ROWS	1/2" COIL Ø		
		A	B	C
3	1	8-1/4" (210)	1-5/8" (143)	1-1/4" (32) *
3	2	8-1/4" (210)	1-7/8" (48)	1-1/8" (29)
3	3	8-1/4" (210)	2" (51)	2-1/4" (57)
4	1	8-1/4" (210)	3" (76)	1-1/4" (32) *
4	2	8-1/4" (210)	3" (76)	1-1/8" (29)
3	4	10-3/8" (264)	2" (51)	3-1/4" (83)
4	3	10-3/8" (264)	3-1/4" (83)	2" (51)
4	4	10-3/8" (264)	3-1/4" (83)	3-1/4" (83)
6	1	10-3/8" (264)	5" (127)	1-1/8" (29) *
6	2	10-3/8" (264)	5-1/4" (133)	1-1/8" (29)

NOTES:

- All dimensions in inches (millimeters). All dimensions ±1/2" (13mm). Metric values are soft conversion.
 - All drawings subject to change without notice.
 - Model "KHGE" unit shown, side panel and drain pan hidden for clarity.
 - Connection Size: See submittal.
 - Standard externally foam coated galvanize steel drain pan has 7/8" ODM copper outlet. Stainless steel drain pan has 3/4" MPT galvanize steel outlet.
 - Auxiliary drain outlet is 5/8" ODM copper or 3/8" MPT galvanized steel respectively.
- * Single row / single circuit headers are vertical (horizontal distance is 0").

DIMENSIONAL DATA | KHGE | FIELD CONNECTIONS, 4-PIPE, 3/8" COIL, REHEAT

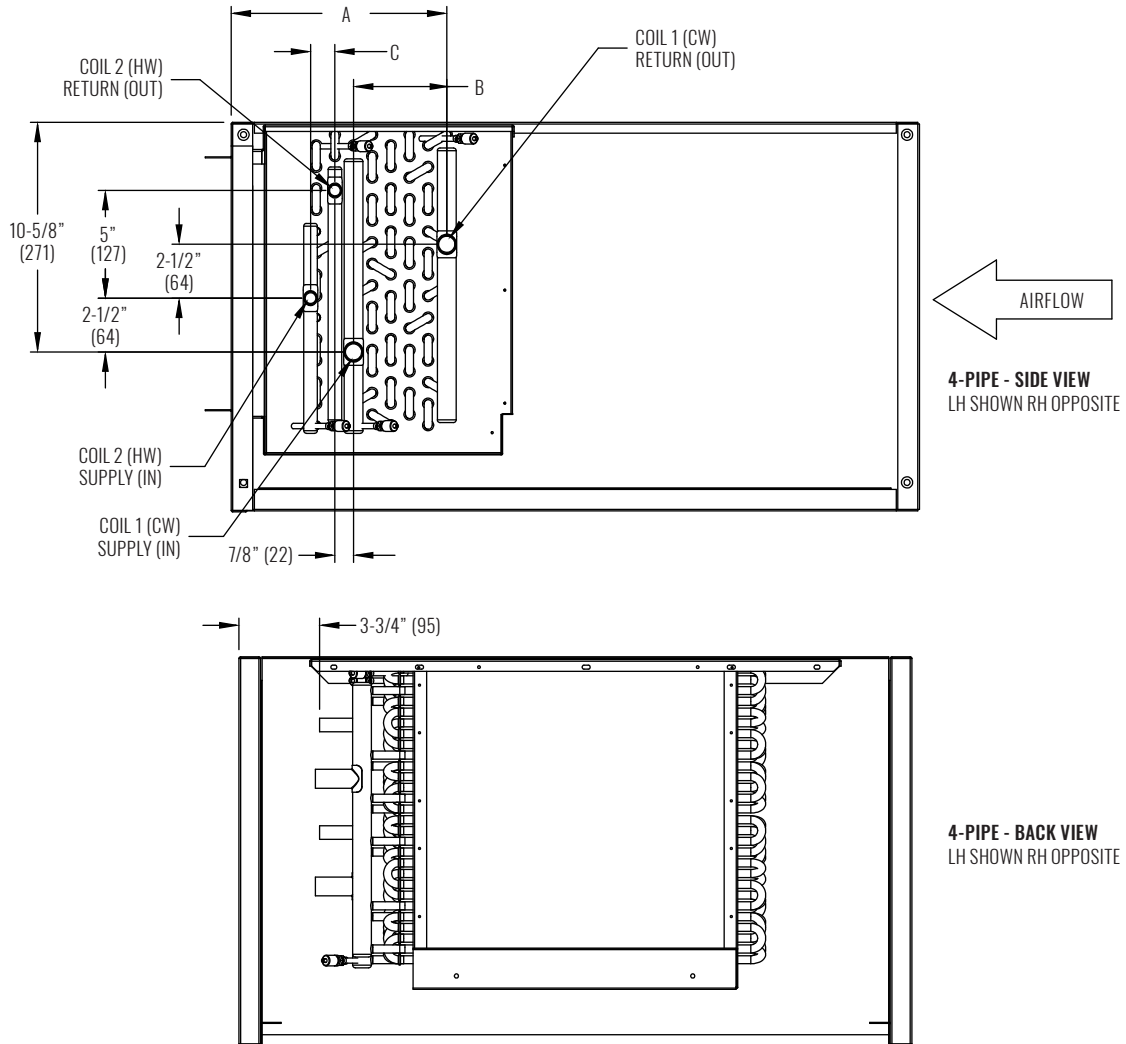

FAN COIL UNITS | HORIZONTAL, HIGH CAPACITY

KHG - SERIES A

UNIT TYPE: 4-PIPE REHEAT				
COIL 1 CW ROWS	COIL 2 HW ROWS	3/8" COIL Ø		
		A	B	C
3	1	8-1/4" (210)	1-1/2" (38)	1" (25) *
3	2	8-1/4" (210)	1-3/8" (35)	1" (25)
3	3	8-1/4" (210)	1-3/4" (44)	1-1/2" (38)
4	1	8-1/4" (210)	1-3/4" (44)	1" (25) *
4	2	8-1/4" (210)	2-1/4" (57)	1" (25)
3	4	10" (254)	1-1/2" (38)	2-5/8" (67)
4	3	10" (254)	2-5/8" (67)	1-1/2" (38)
4	4	10" (254)	2-5/8" (67)	2-1/4" (57)
6	1	10" (254)	3-1/2" (89)	1" (25) *
6	2	10" (254)	4" (102)	1" (25)

NOTES:


1. All dimensions in inches (millimeters). All dimensions ±1/2" (13mm). Metric values are soft conversion.
 2. All drawings subject to change without notice.
 3. Model "KHGE" unit shown, side panel and drain pan hidden for clarity.
 4. Connection Size: See submittal.
 5. Standard externally foam coated galvanize steel drain pan has 7/8" ODM copper outlet. Stainless steel drain pan has 3/4" MPT galvanize steel outlet.
 6. Auxiliary drain outlet is 5/8" ODM copper or 3/8" MPT galvanized steel respectively.
- * Single row / single circuit headers are vertical (horizontal distance is 0").

KHG - SERIES A

Horizontal | High Capacity



DIMENSIONAL DATA | KHGE | FIELD CONNECTIONS, 4-PIPE, 1/2" COIL, PREHEAT

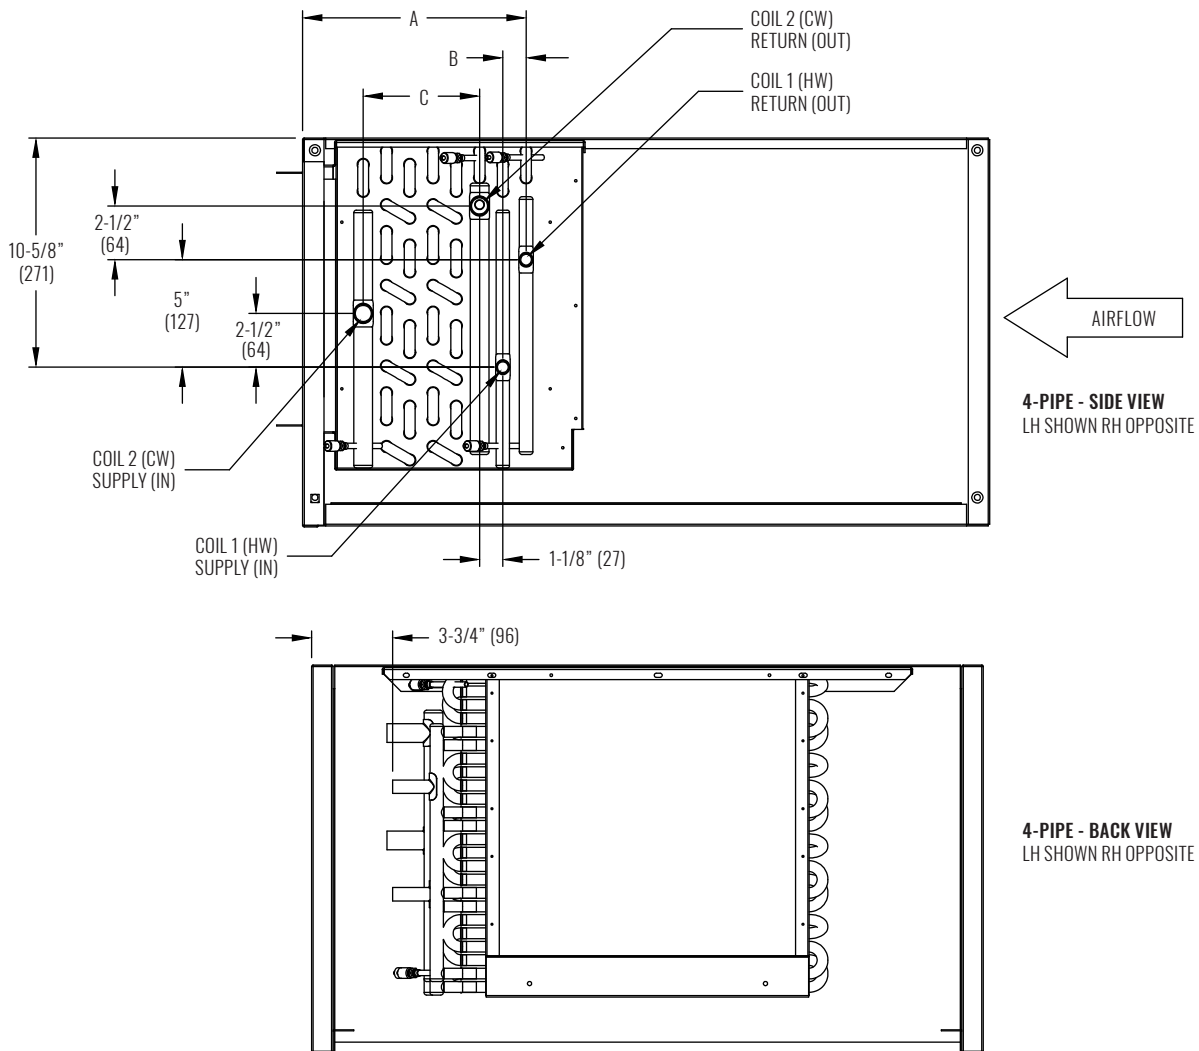

UNIT TYPE: 4-PIPE PREHEAT				
COIL 1 HW ROWS	COIL 2 CW ROWS	1/2" COIL Ø		
		A	B	C
1	3	9-1/8" (232)	1-1/8" (29)*	1-5/8" (41)
1	4	9-1/8" (232)	1-1/8" (29)*	2-1/2" (64)
2	3	8-1/4" (210)	1-1/8" (29)	2-1/8" (54)
2	4	8-1/4" (210)	1-1/8" (29)	3-1/8" (79)
3	3	8-1/4" (210)	2-1/8" (76)	2" (51)
1	6	11-1/8" (283)	1-1/8" (29)*	4-3/4" (121)
2	6	10-3/8" (264)	1-1/8" (29)	5-1/4" (133)
3	4	10-3/8" (264)	2-1/8" (54)	3-1/8" (79)
4	3	10-3/8" (264)	3-1/4" (83)	2-1/8" (54)
4	4	10-3/8" (264)	3-1/4" (83)	3-1/8" (79)

NOTES:


- All dimensions in inches (millimeters). All dimensions $\pm 1/2"$ (13mm). Metric values are soft conversion.
- All drawings subject to change without notice.
- Model "KHGE" unit shown, side panel and drain pan hidden for clarity.
- Connection Size: See submittal.
- Standard externally foam coated galvanize steel drain pan has 7/8" ODM copper outlet. Stainless steel drain pan has 3/4" MPT galvanize steel outlet.
- Auxiliary drain outlet is 5/8" ODM copper or 3/8" MPT galvanized steel respectively.

* Single row / single circuit headers are vertical (horizontal distance is 0").

FAN COIL UNITS | HORIZONTAL, HIGH CAPACITY

KHG - SERIES A

DIMENSIONAL DATA | KHGE | FIELD CONNECTIONS, 4-PIPE, 3/8" COIL, PREHEAT

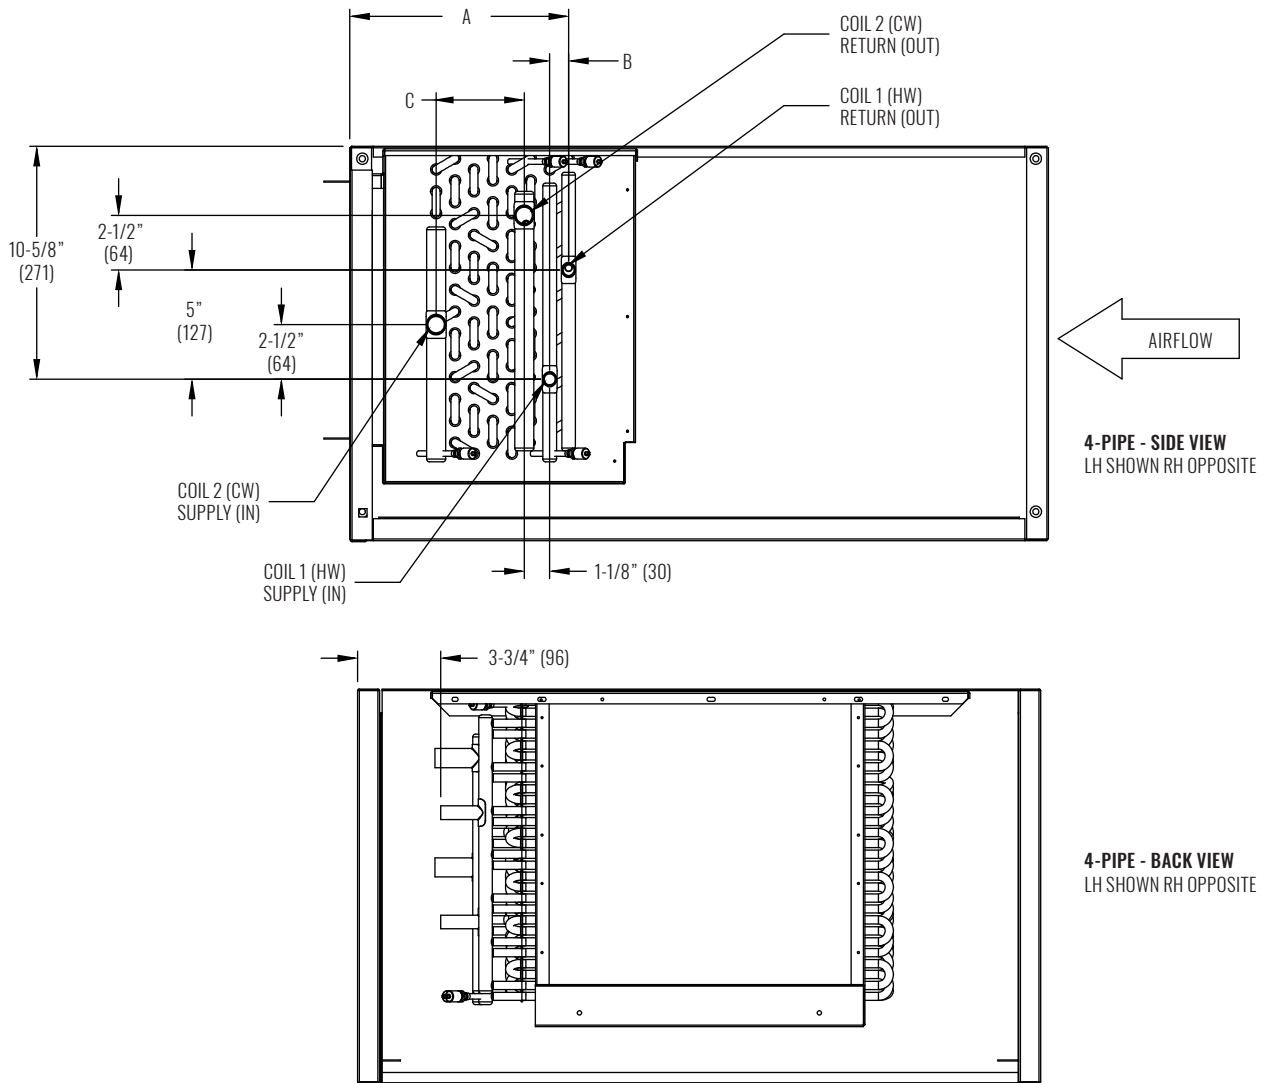

UNIT TYPE: 4-PIPE PREHEAT				
COIL 1 HW ROWS	COIL 2 CW ROWS	3/8" COIL Ø		
		A	B	C
1	3	9" (229)	1" (25) *	1-1/2" (38)
1	4	9" (229)	1" (25) *	1-3/4" (44)
2	3	8-1/4" (210)	1" (25)	1-1/2" (38)
2	4	8-1/4" (210)	1" (25)	2" (51)
3	3	8-1/4" (210)	1-3/4" (44)	1-1/2" (38)
1	6	10-3/4" (273)	1" (25) *	3-1/2" (89)
2	6	10" (254)	1" (25)	3-3/4" (95)
3	4	10" (254)	1-3/4" (44)	2-1/4" (57)
4	3	10" (254)	2-5/8" (67)	1-1/2" (38)
4	4	10" (254)	2-5/8" (67)	2-1/4" (57)

NOTES:

- All dimensions in inches (millimeters). All dimensions ±1/2" (13mm). Metric values are soft conversion.
 - All drawings subject to change without notice.
 - Model "KHGE" unit shown, side panel and drain pan hidden for clarity.
 - Connection Size: See submittal.
 - Standard externally foam coated galvanize steel drain pan has 7/8" ODM copper outlet. Stainless steel drain pan has 3/4" MPT galvanize steel outlet.
 - Auxiliary drain outlet is 5/8" ODM copper or 3/8" MPT galvanized steel respectively.
- * Single row / single circuit headers are vertical (horizontal distance is 0").

KHG - SERIES A



Horizontal | High Capacity



DIMENSIONAL DATA | KHGE | FIELD CONNECTIONS, DX COIL

FAN COIL UNITS | HORIZONTAL, HIGH CAPACITY

KHG - SERIES A

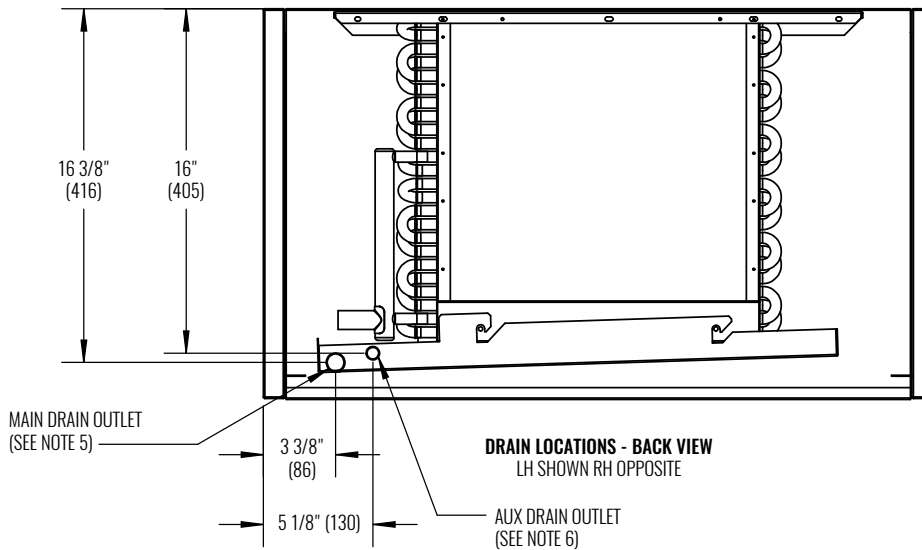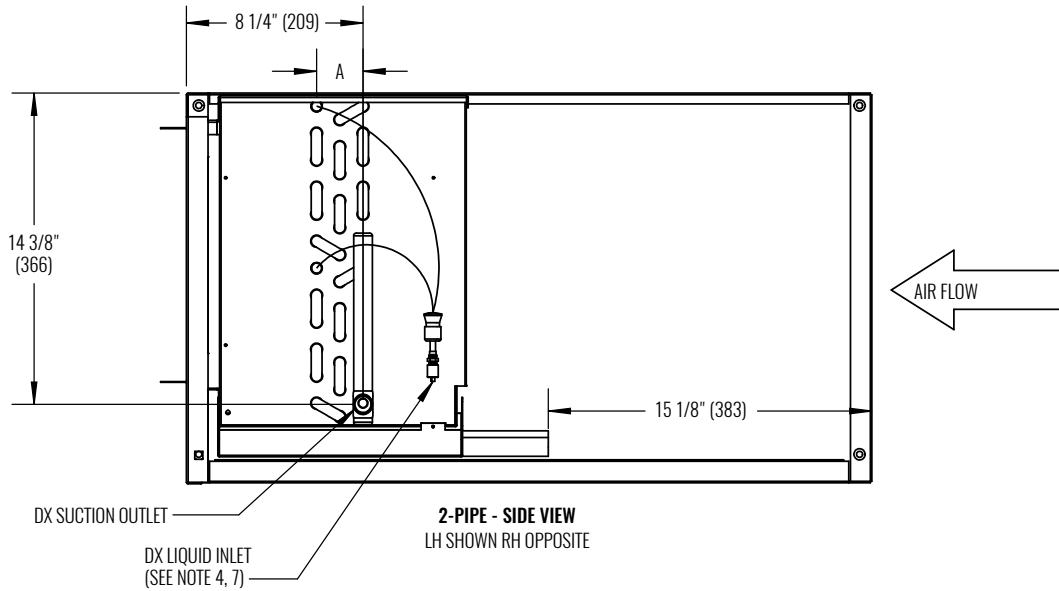


UNIT TYPE	DX COIL ROWS	A (1/2" COIL Ø)
2-PIPE COOLING	3	2-1/8" (55)
	4	3-1/4" (82)
	6	5-3/8" (137)


NOTES:

1. All dimensions are inches (millimeters). All dimensions 1/2" (13mm). Metric values are soft conversion.
2. All drawings subject to change without notice.
3. Model "HPE" unit shown, side panel hidden for clarity.
4. Connection Size: See submittal. Stainless steel drain pan has 3/4" MPT galvanized steel outlet.
5. Standard externally foam coated galvanized steel drain pan has 7/8" ODM copper outlet. Stainless steel drain pan has 3/4" MPT galvanized steel outlet.
6. Auxiliary drain outlet is 5/8" ODM copper or 3/8" MPT galvanized steel respectively.
7. Liquid inlet arrangement may vary.

DIMENSIONAL DATA | KHGE | FIELD CONNECTIONS, 4-PIPE, 1/2" DX COIL, REHEAT

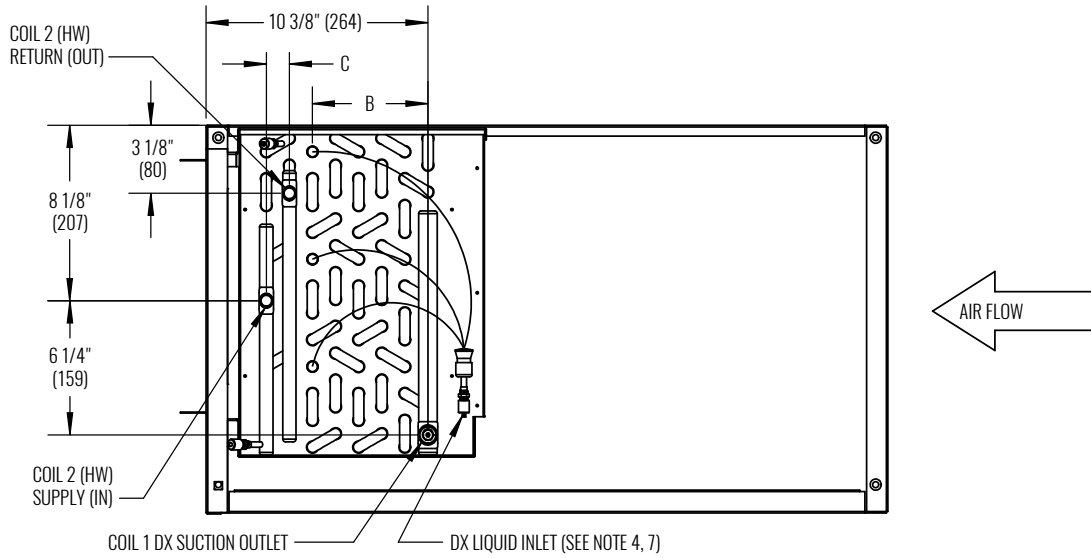

4-PIPE - SIDE VIEW
LH SHOWN RH OPPOSITE

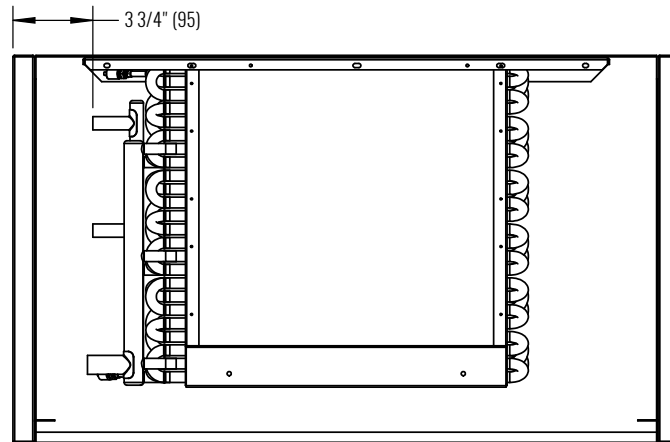

4-PIPE - FRONT VIEW
LH SHOWN RH OPPOSITE

UNIT TYPE: 4-PIPE REHEAT				
COIL 1 DX ROWS	COIL 2 HW ROWS	1/2" COIL Ø		
		A	B	C
3	1	8-1/4" (210)	2-1/8" (52)	7/8" (22) *
3	2	8-1/4" (210)	2-1/8" (52)	1-1/8" (29)
3	3	8-1/4" (210)	2-1/8" (52)	2-1/8" (54)
4	1	8-1/4" (210)	3-1/4" (83)	1" (25.5) *
4	2	8-1/4" (210)	3-1/4" (83)	1" (25.5)
3	4	10-3/8" (364)	2-1/8" (52)	3-1/4" (83)
4	3	10-3/8" (364)	3-1/4" (83)	2-1/4" (54)
4	4	10-3/8" (364)	3-1/4" (83)	3-1/4" (83)
6	1	10-3/8" (364)	5-1/2" (140)	7/8" (22) *
6	2	10-3/8" (364)	5-1/2" (140)	1-1/8" (27)

NOTES:


1. All dimensions are inches (millimeters). All dimensions 1/2" (13mm). Metric values are soft conversion.
 2. All drawings subject to change without notice.
 3. Model "HPE" unit shown, side panel hidden for clarity.
 4. Connection Size: See submittal. Stainless steel drain pan has 3/4" MPT galvanize steel outlet.
 5. Standard externally foam coated galvanize steel drain pan has 7/8" ODM copper outlet. Stainless steel drain pan has 3/4" MPT galvanize steel outlet.
 6. Auxiliary drain outlet is 5/8" ODM copper or 3/8" MPT galvanized steel respectively.
 7. Liquid inlet arrangement may vary.
- * Single row / single circuit headers are vertical (horizontal distance is 0")

KHG - SERIES A


Horizontal | High Capacity



DIMENSIONAL DATA | KHGE | FIELD CONNECTIONS, DX COIL, ELECTRIC HEAT

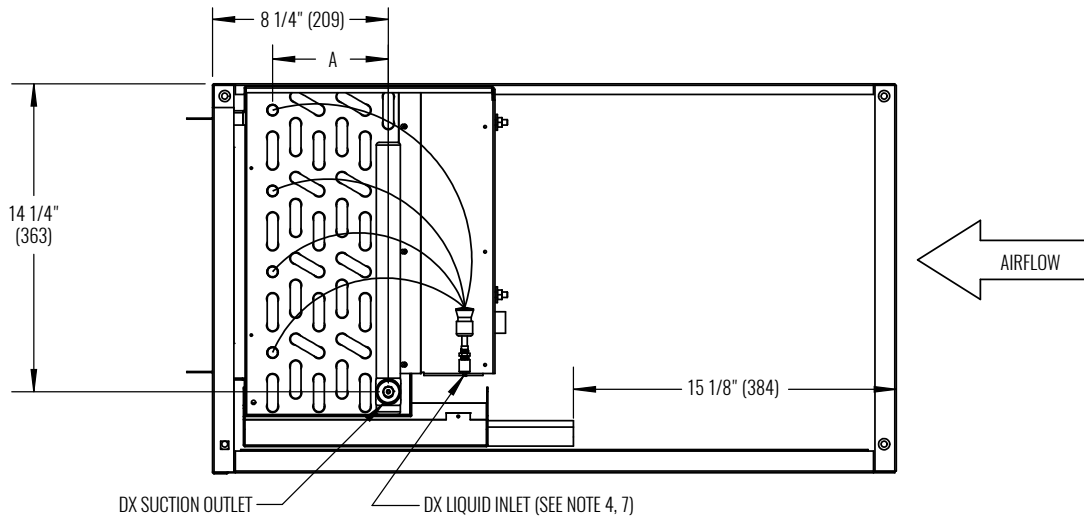

2-PIPE - SIDE VIEW
LH SHOWN RH OPPOSITE

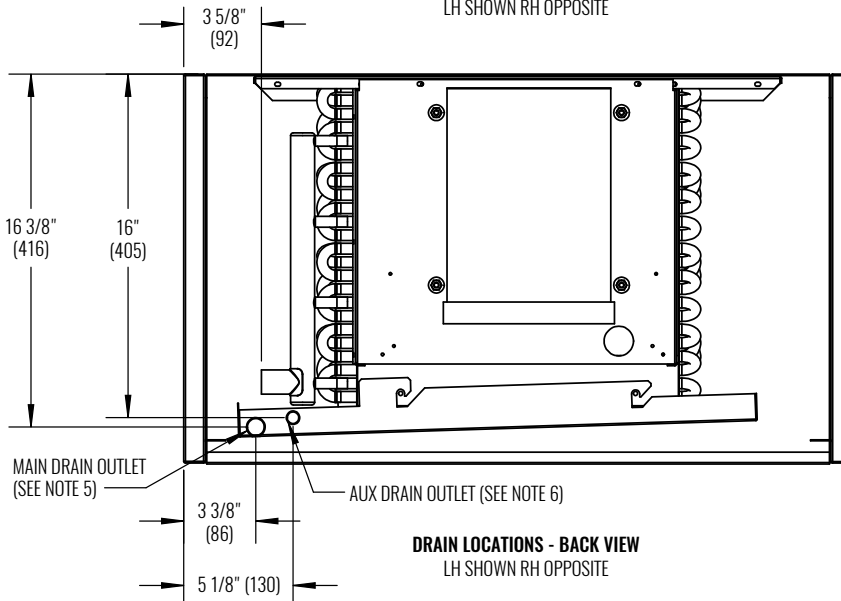

DRAIN LOCATIONS - BACK VIEW
LH SHOWN RH OPPOSITE

UNIT TYPE	DX COIL ROWS	A (1/2" COIL Ø)
2-PIPE COOLING	3	2-1/8" (55)
	4	3-1/4" (82)
	6	5-3/8" (137)

NOTES:

1. All dimensions are inches (millimeters). All dimensions 1/2" (13mm). Metric values are soft conversion.
2. All drawings subject to change without notice.
3. Model "HPE" unit shown, side panel hidden for clarity.
4. Connection Size: See submittal. Stainless steel drain pan has 3/4" MPT galvanized steel outlet.
5. Standard externally foam coated galvanized steel drain pan has 7/8" ODM copper outlet. Stainless steel drain pan has 3/4" MPT galvanized steel outlet.
6. Auxiliary drain outlet is 5/8" ODM copper or 3/8" MPT galvanized steel respectively.
7. Liquid inlet arrangement may vary.

FAN COIL UNITS | HORIZONTAL, HIGH CAPACITY

KHG - SERIES A

KHG - SERIES A



Horizontal | High Capacity



DIMENSIONAL DATA | KHGE | VALVE PACKAGE CONNECTIONS, STANDARD WIDTH

FAN COIL UNITS | HORIZONTAL, HIGH CAPACITY





KHG - SERIES A

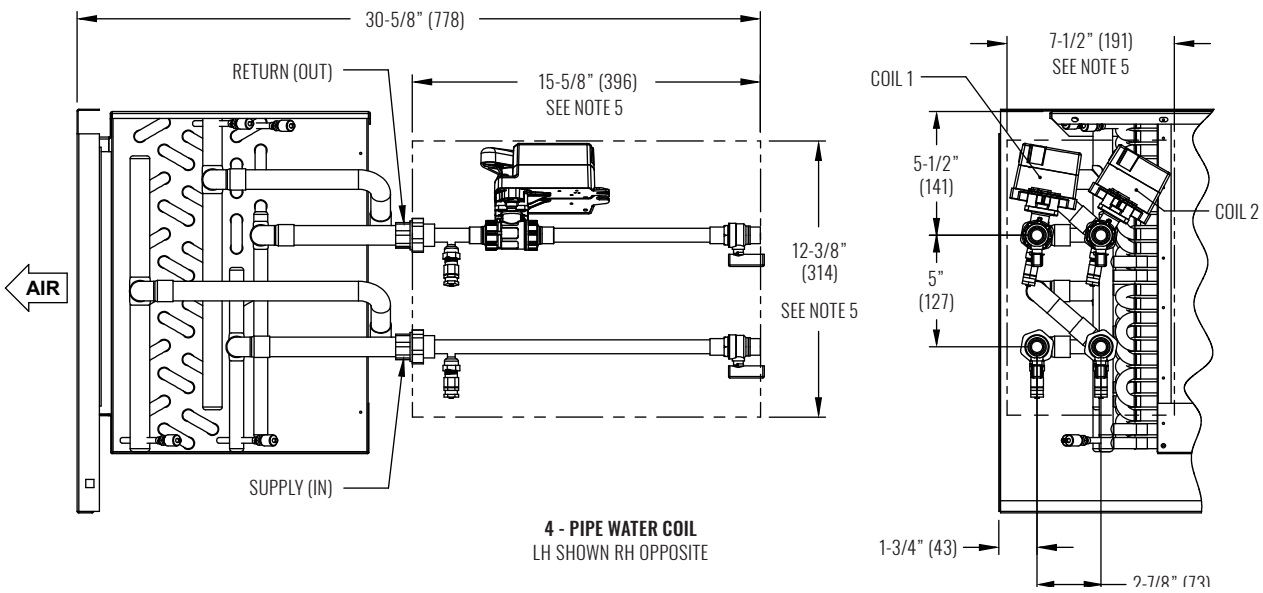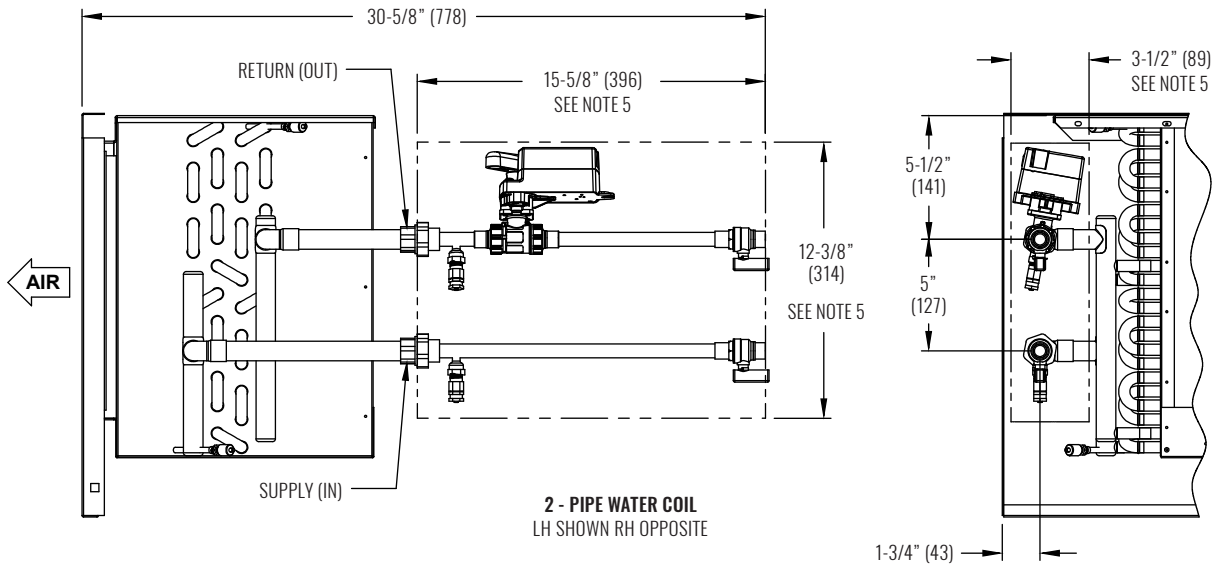

NOTES:

1. All dimensions in inches (millimeters). All dimensions $\pm 1/2"$ (13mm). Metric values are soft conversion.
2. All drawings subject to change without notice.
3. See "Coil Connection Location" drawing for drain pan specifications.
4. Consult software selection summary for valve package components and specifications. Valve package end point dimensions are fixed value, regardless of selected valve package components.
5. Dimensions indicate space requirement for valve package install. Additional service space requirements depend on option selections.

DIMENSIONAL DATA | KHGE | VALVE PACKAGE CONNECTIONS, EXTENDED WIDTH

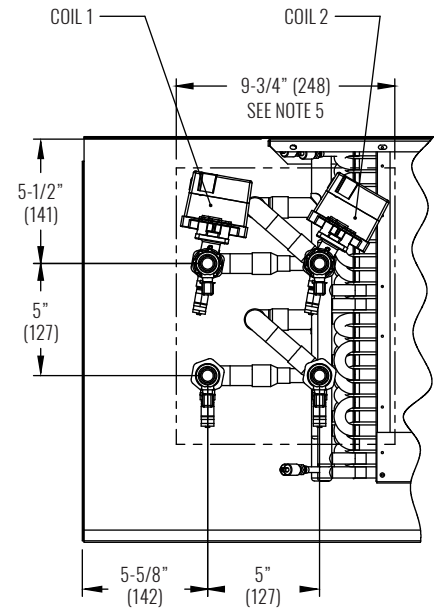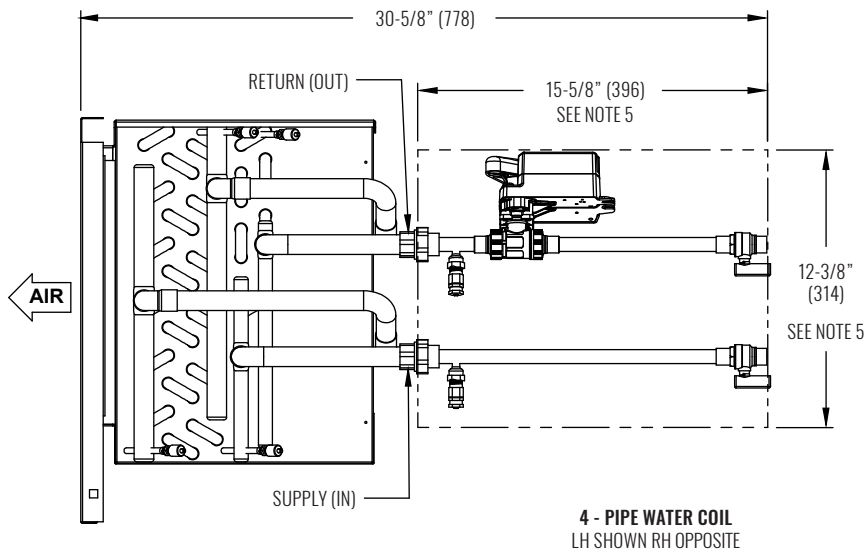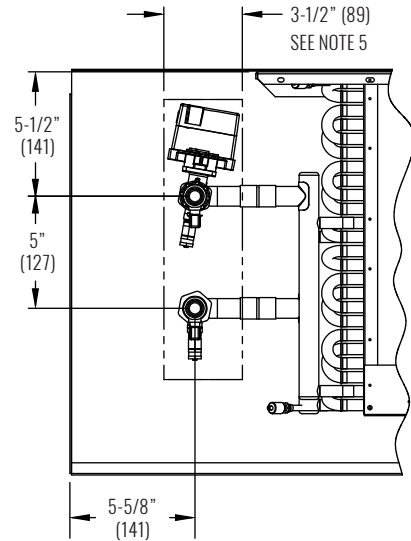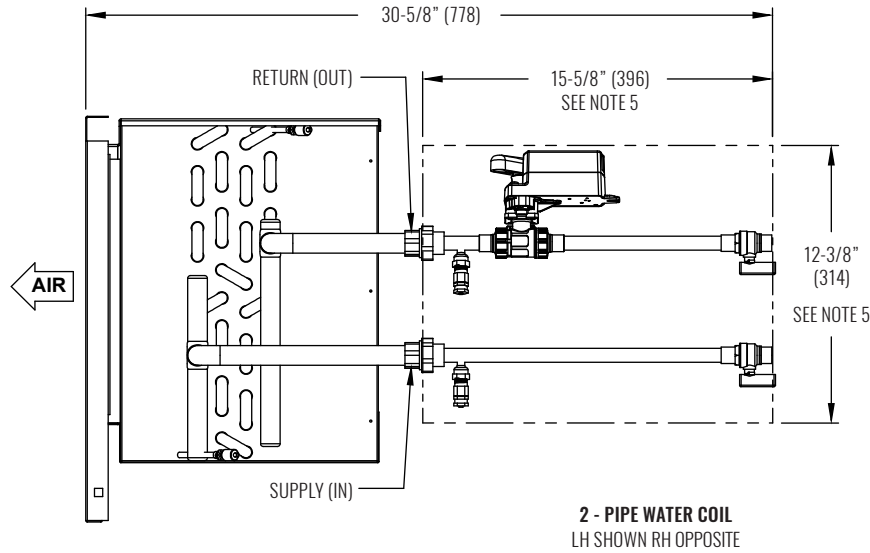

NOTES:

1. All dimensions in inches (millimeters). All dimensions $\pm 1/2"$ (13mm). Metric values are soft conversion.
2. All drawings subject to change without notice.
3. See "Coil Connection Location" drawing for drain pan specifications.
4. Consult software selection summary for valve package components and specifications. Valve package end point dimensions are fixed value, regardless of selected valve package components.
5. Dimensions indicate space requirement for valve package install. Additional service space requirements depend on option selections.