


JOB NAME \_\_\_\_\_  
ARCHITECT \_\_\_\_\_  
ENGINEER \_\_\_\_\_  
CONTRACTOR \_\_\_\_\_  
LOCATION \_\_\_\_\_

## SUBMITTAL SHEET


Form Number TUIN06.2 Effective Date 9/20  
Replaces TUIN06.1



# KRUEGER

Excellence in Air Distribution

## 1/2" Foil Faced Insulation Submittal

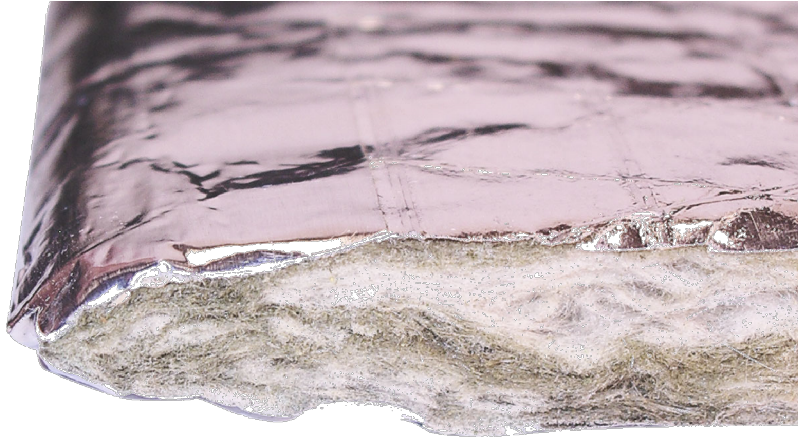

### Physical Properties

---

Material	Fiberglass with Foil Facing
Thickness	1/2 inch
R-Value	2.0
Density	1.5 lbs / ft <sup>3</sup>
Operating Temperature	250°F / (121°C)
Flame Spread	25
Smoke Density	50
Mold Growth and Humidity	None
Edge Treatment	Foil wrapped edges

### Code Compliances

---

UL 181	Air Erosion
UL 181	Mold Growth and Humidity
UL 723	Flame / Smoke (25/50)
ASTM E 84	Flame / Smoke Spread (25/50)
NFPA 90A & 90B	Appliances
ASTM C 665	Corrosiveness Test
ASTM 1338	Fungi Resistance
ASTM G 21	Fungi Resistance
ASTM G 22	Fungi Resistance