

JOB NAME _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 LOCATION _____


SUBMITTAL SHEET
 Form Number TUS0336 Effective Date 10/03
 replaces New




KQFS / KQFP
HOT WATER COILS - 1 ROW & 2 ROW LH DISCHARGE VENT AND DRAIN

MODEL	UNIT SIZE	W	H	D
KQFP/ KQFS 1 ROW	2	17" (432 mm)	15 1/8" (384 mm)	13 3/4" (349 mm)
	3			
	4			
	5			
	6	25" (635 mm)	17 5/8" (448 mm)	16 1/4" (413 mm)
	7			


MODEL	UNIT SIZE	W	H	D
KQFP/ KQFS 2 ROW	2	17" (432 mm)	15 1/8" (384 mm)	13 3/4" (349 mm)
	3			
	4			
	5			
	6	25" (635 mm)	17 5/8" (448 mm)	16 1/4" (413 mm)
	7			

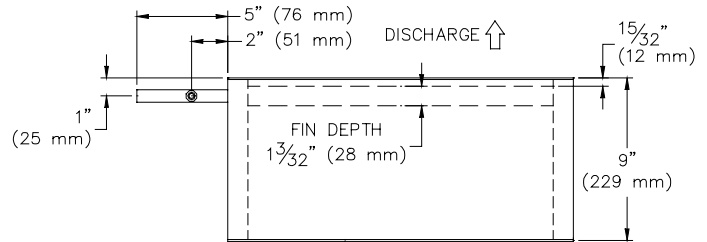

1 ROW LH HOT WATER COIL

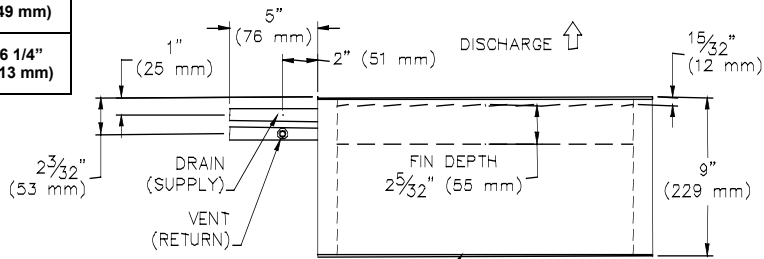

2 ROW LH HOT WATER COIL

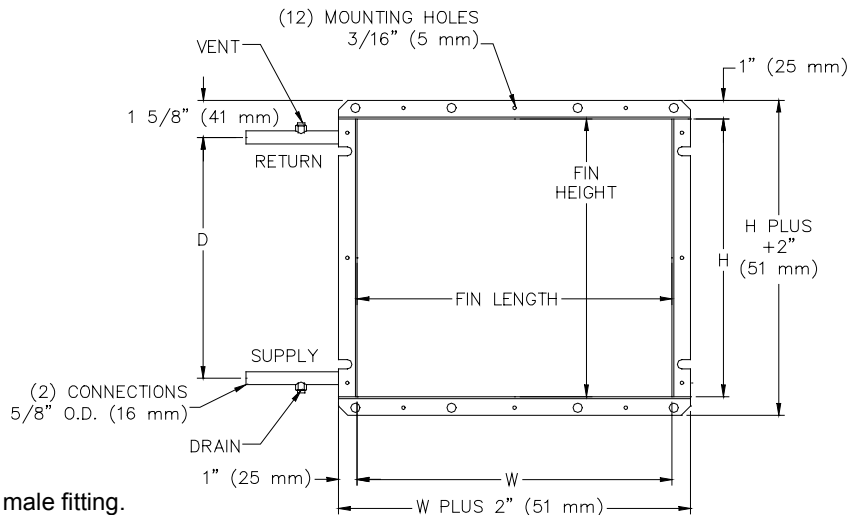

STANDARD FEATURES:

- Connection Tubing - .63" diameter male fitting.
- Coil Casing - 20 Ga. Galvanized steel.
- Coil Tubing - .50" diameter x .017" thick copper.
- Coil Fins - .0045" thick aluminum, 10 per inch, mechanically bonded to tubing.
- Coils are leak tested to 400 psi
- Coils are not for steam applications

NOTE:

- 1) Dimensions are given in inches and (mm)
- 2) KQFP with induced mounted coils use RH water coil. (see TUS0335)