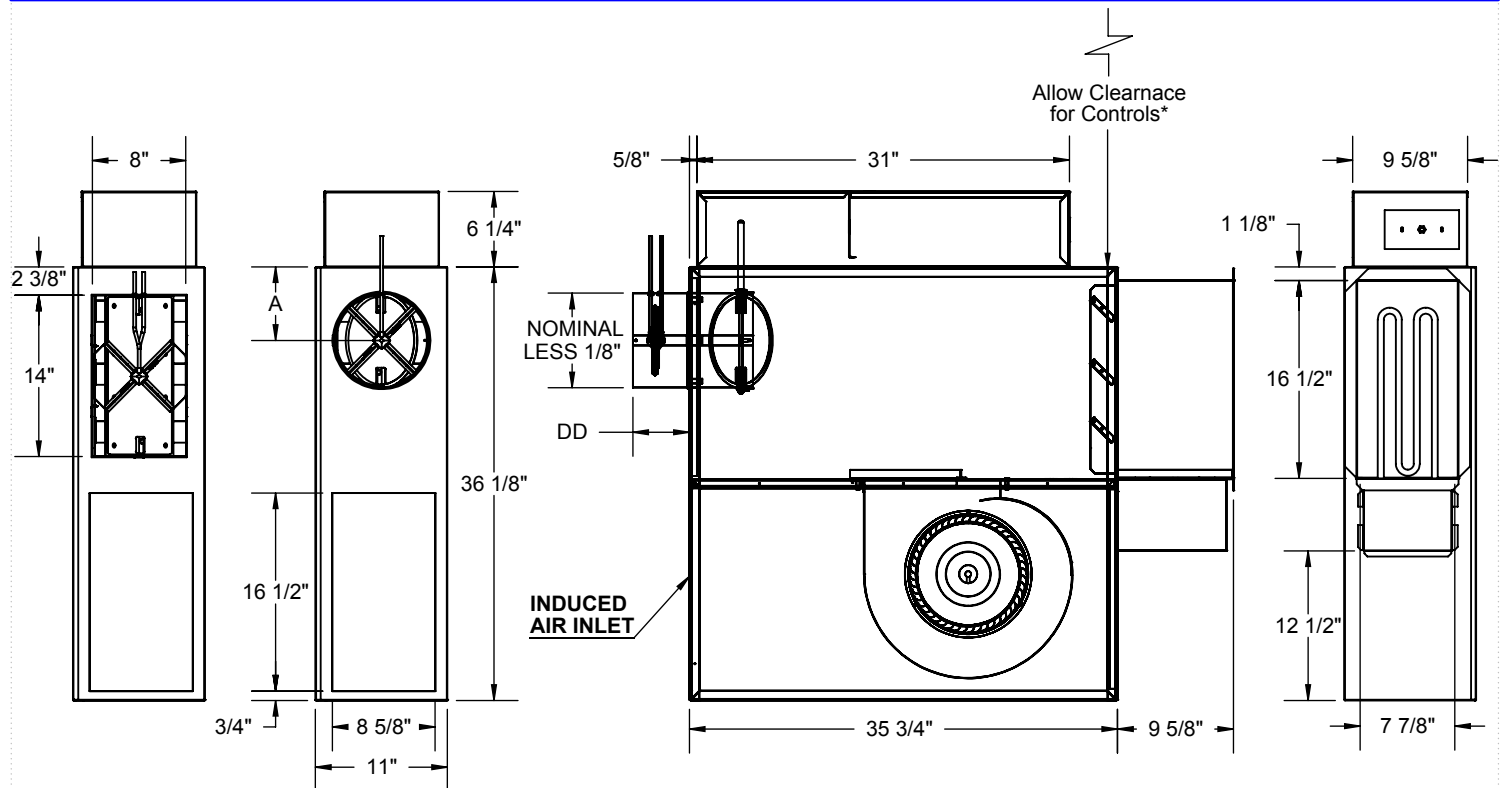


KLPP Unit Size 4
Electric Heat with Electronic Controls
SUBMITTAL SHEET


Inlet Size	A	DD
08"	7"	4 7/8"
10"	9"	4 7/8"
12" (8"x14")	--	3 7/8"

INLET VIEW
PLAN VIEW - LEFT HAND UNIT
DISCHARGE VIEW
STANDARD FEATURES:

- 20GA. Galvanized Steel Construction
- Steel Control Enclosure for Electronic Components
- 1/2" Thick Dual Density Fiberglass Insulation Meeting NFPA 90A and UL181 Safety Requirements
- 1/4 HP Single Speed, Single Phase, Permanently Lubricated PSC Motor
 - 120V
 - 208/240V
 - 277V
- Field Adjustable Speed Controller
- Bottom Access Panel for Service
- 4 Quadrant, Center Averaging Inlet Flow Sensor
- Factory Supplied 24 Volt Control Transformer for Electronic Controls
- ETL Listed
- Performance Data per AHRI Standard 880
- Variety of Direct Digital or Analog Electronic Control Packages Available

*Check NEC for Unit Clearance Requirements

OPTIONAL FEATURES:

- 1/3 HP ECM Motor with Permanently Lubricated Ball Bearings and Constant Airflow Program
- Manual Control
- 2-10Vdc Remote Control
- 120V
- 208/240V
- 277V
- Liners
 - 1/2" Cellular Insulation
 - 1/2" Foil Encapsulated Fiberglass Insulation
 - Solid Metal Liner with 1/2" Dual Density Fiberglass
 - Perforated Metal Liner with 1/2" Dual Density Fiberglass
- Construction Type Air Filter – 18" x 11" x 1"
- Linear Averaging Inlet Flow Sensor
- LineaHeat Controlled SSR Heat
 - Discharge Temperature Sensor
- 24 VAC SSR
- Manual Reset Cutoff
- Left Hand Controls
- Right Hand Controls
- Motor Fusing
- Hanger Brackets
- Dust Tight Control Enclosure
- Door Interlocking Disconnect Switch
 - Fused
 - Non-Fused