


KLPP Unit Size 4

Induced Hot Water Heat with Electronic Controls

SUBMITTAL SHEET

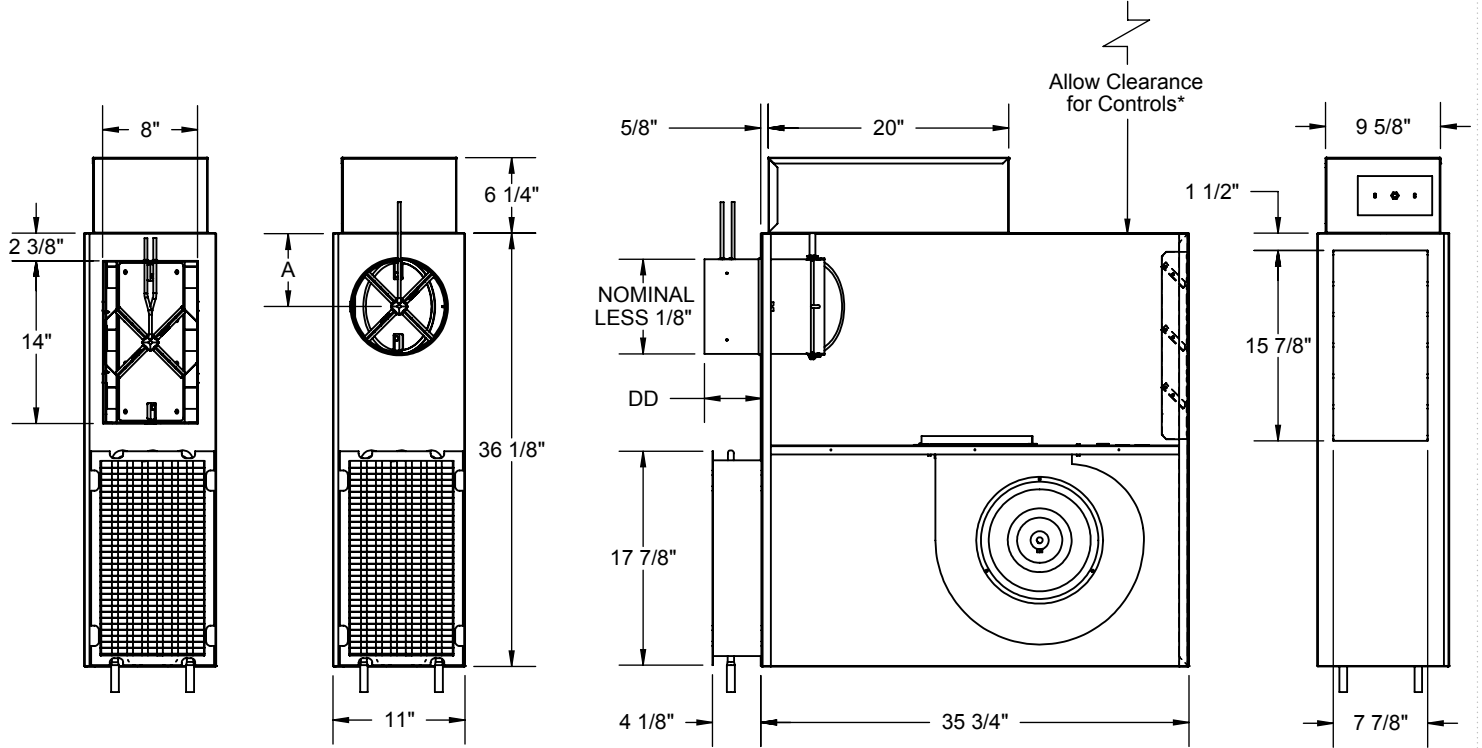

Inlet Size	A	DD
08"	7"	4 7/8"
10"	9"	4 7/8"
12" (8"x14")	--	3 7/8"

INLET VIEW

**PLAN VIEW - LEFT HAND UNIT
(Right Hand Coil Connection Shown)**

DISCHARGE VIEW

STANDARD FEATURES:

- 20GA. Galvanized Steel Construction
- Steel Control Enclosure for Electronic Components
- 1/2" Thick Dual Density Fiberglass Insulation Meeting NFPA 90A and UL181 Safety Requirements
- 1/4 HP Single Speed, Single Phase, Permanently Lubricated PSC Motor
 - ☐ 120V ☐ 208/240V ☐ 277V
- Field Adjustable Speed Controller
- Bottom Access Panel for Service
- 4 Quadrant, Center Averaging Inlet Flow Sensor
- Factory Supplied 24 Volt Control Transformer for Electronic Controls
- ETL Listed
- Performance Data per AHRI Standard 880
- Variety of Direct Digital or Analog Electronic Control Packages Available

*Check NEC for Unit Clearance Requirements

OPTIONAL FEATURES:

- ☐ 1/3 HP ECM Motor with Permanently Lubricated Ball Bearings and Constant Airflow Program
- ☐ Manual Control ☐ 0-10Vdc Remote Control
- ☐ 2-10Vdc Remote Control
- ☐ 120V ☐ 208/240V ☐ 277V
- Liners
 - ☐ 1/2" Cellular Insulation ☐ No Liner
 - ☐ 1/2" Foil Encapsulated Fiberglass Insulation
 - ☐ Solid Metal Liner with 1/2" Dual Density Fiberglass
 - ☐ Perforated Metal Liner with 1/2" Dual Density Fiberglass
- Hot Water Coil Connections**
 - ☐ Left Hand ☐ Right Hand
 - ☐ Left Hand Controls ☐ Right Hand Controls
 - ☐ Motor Toggle Disconnect Switch ☐ Motor Fusing
 - ☐ Dust Tight Control Enclosure ☐ Hanger Brackets
 - ☐ Linear Averaging Inlet Flow Sensor
 - ☐ Construction Type Air Filter – 18" x 11" x 1"

** Water Coil Connection Is Opposite of Control Enclosure