


JOB NAME ENGINEER CONTRACTOR TAG

 	 <u> </u>	


## SUBMITTAL SHEET

sensible Cooling Colls					
MODEL	Number	۸	Ь		

MODEL	Number of Rows	А	В
	2	7 7/8"	2 1/8"
KLPS-D	4	7 7/8"	4 3/8"
	6	10"	6 1/2"

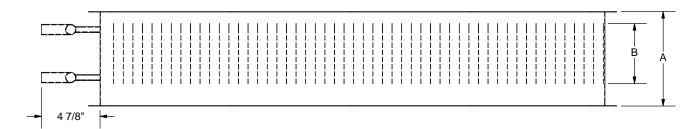

**TOP VIEW** 

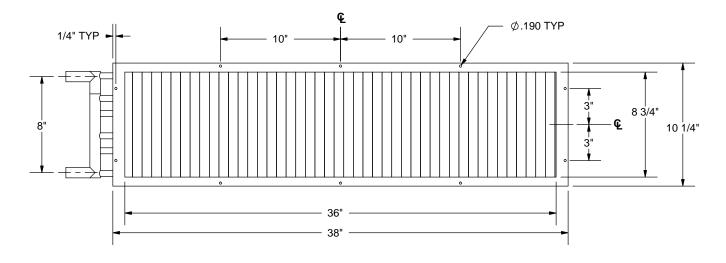

## **INLET VIEW**

## **STANDARD FEATURES:**

- Connection Tubing 0.875" O.D. Male Fitting
- Coil Casing with Weep Holes 20 Ga. Galvanized Steel
- Coil Tubing 0.50" Diameter x 0.016" Thick Copper
- Coil Fins 0.0045" Thick Aluminum, 10 per Inch Mechanically Bonded to Tubing
- Coils are Leak Tested to 400 psi.

NOTE: Entering Water Temperature Must be Above Dew Point to Prevent Condensation on Coil. Typical Design Entering Water Temperature for Cooling Coil Ranges 55°F to 60°F.

Revision Date: 8/14 Form: TUS03-300-WSC00-1 Replaces: TUS03-300-WH000-2