


UNIT TYPE	COIL ROWS	A
2 Pipe Heating	1	1" (25)
	2	7/8" (22)
2 Pipe Cooling	2	1 1/8" (29)
	3	1 3/4" (44)
	4	2 5/8" (67)
	5	3 1/2" (89)
	6	4 3/8" (111)

NOTE:


- All dimensions are inches (millimeters). All dimensions $\pm 1/2$ (13mm). Metric values are soft conversion.
- All drawings subject to change without notice.
- Model "KHFP" unit shown, typical for model "KHFH" units. Connections shown are internal on "KHFE" units.
- Connection Size:
 - Chilled Water: 7/8 ODM (3/4" NOM.)
 - Hot Water: 5/8 ODM (1/2" NOM.)
- Standard externally foam coated galvanized steel drain pan has 7/8" ODM copper outlet. Stainless steel drain pan has 3/4" MPT galvanized steel outlet.
- Aux. drain outlet is 5/8" ODM copper or 3/8" MPT galvanized steel respectively. Aux. drain outlet is always on viewer's left when facing outlet end of drain pan, regardless of unit hand.

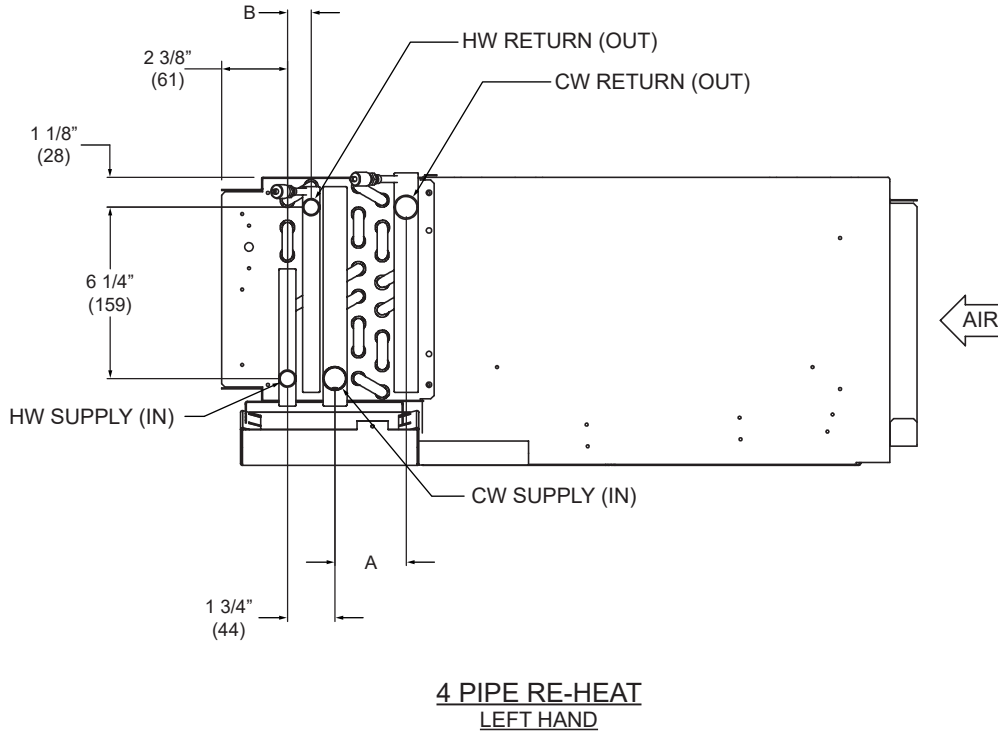

4 PIPE RE-HEAT			
COIL 1 ROWS	A	COIL 2 ROWS	B
2	1 1/8" (29)	1	1" (25)
3	1 3/4" (44)	1	1" (25)
4	2 5/8" (67)	1	1" (25)
5	3 1/2" (89)	1	1" (25)
2	1 1/8" (29)	2	7/8" (22)
3	1 3/4" (44)	2	7/8" (22)
4	2 5/8" (67)	2	7/8" (22)

NOTE:

- All dimensions are inches (millimeters). All dimensions $\pm 1/2$ (13mm). Metric values are soft conversion.
- All drawings subject to change without notice.
- Model "KHFP" unit shown, typical for model "KHFH" units. Connections shown are internal on "KHFE" units.
- Connection Size:
 - Chilled Water: 7/8 ODM (3/4" NOM.)
 - Hot Water: 5/8 ODM (1/2" NOM.)
- Standard externally foam coated galvanized steel drain pan has 7/8" ODM copper outlet. Stainless steel drain pan has 3/4" MPT galvanized steel outlet.
- Aux. drain outlet is 5/8" ODM copper or 3/8" MPT galvanized steel respectively. Aux. drain outlet is always on viewer's left when facing outlet end of drain pan, regardless of unit hand.

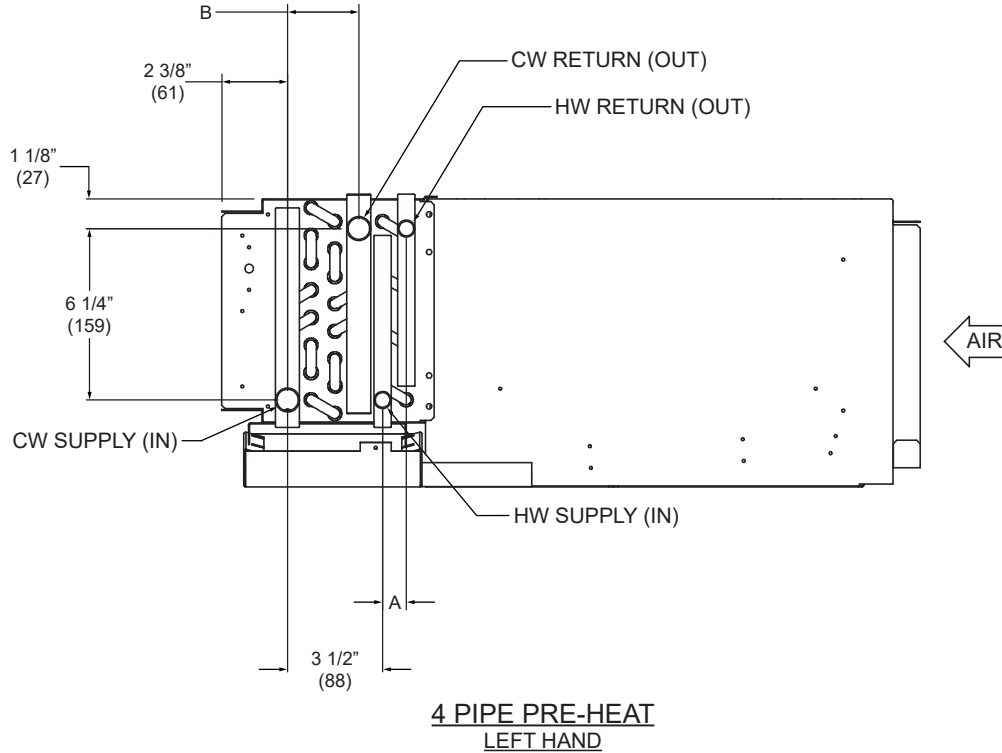

4 PIPE PRE-HEAT			
COIL 1 ROWS	A	COIL 2 ROWS	B
1	1" (25)	2	1 1/8" (29)
1	1" (25)	3	1 3/4" (44)
1	1" (25)	4	2 5/8" (67)
1	1" (25)	5	3 1/2" (89)
2	7/8" (22)	2	1 1/8" (29)
2	7/8" (22)	3	1 3/4" (44)
2	7/8" (22)	4	2 5/8" (67)

NOTE:

- All dimensions are inches (millimeters). All dimensions $\pm 1/2$ (13mm). Metric values are soft conversion.
- All drawings subject to change without notice.
- Model "KHFP" unit shown, typical for model "KHFH" units. Connections shown are internal on "KHFE" units.
- Connection Size:
 - Chilled Water: 7/8 ODM (3/4" NOM.)
 - Hot Water: 5/8 ODM (1/2" NOM.)
- Standard externally foam coated galvanized steel drain pan has 7/8" ODM copper outlet. Stainless steel drain pan has 3/4" MPT galvanized steel outlet.
- Aux. drain outlet is 5/8" ODM copper or 3/8" MPT galvanized steel respectively. Aux. drain outlet is always on viewer's left when facing outlet end of drain pan, regardless of unit hand.