

INTRODUCTION


Krueger KHF Series A of horizontal low profile fan coil units are designed to maximize flexibility of selection and installation. The units are also designed to exceed the stringent quality standards of the institutional market, while remaining cost competitive in the light commercial segment of the market. Krueger horizontal fan coil units set the new standards for quality, flexibility, and competitive pricing.

MODELS


KHFE-Series A - Horizontal, Exposed Cabinet Fan Coil

KHFH-Series A - Horizontal, Concealed Ceiling Fan Coil


KHFP-Series A - Horizontal, Concealed with Plenum Fan Coil

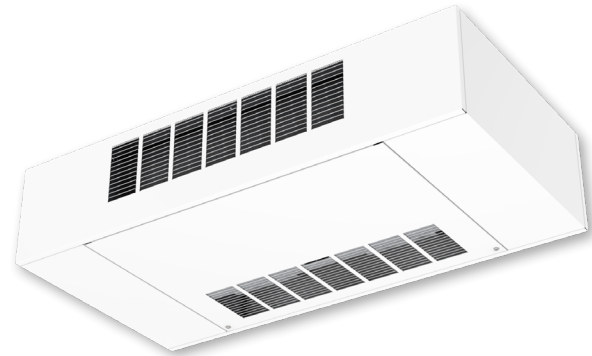

KHFE - SERIES A

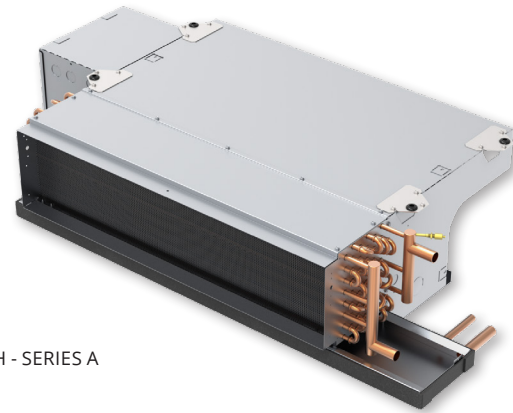

KHFH - SERIES A

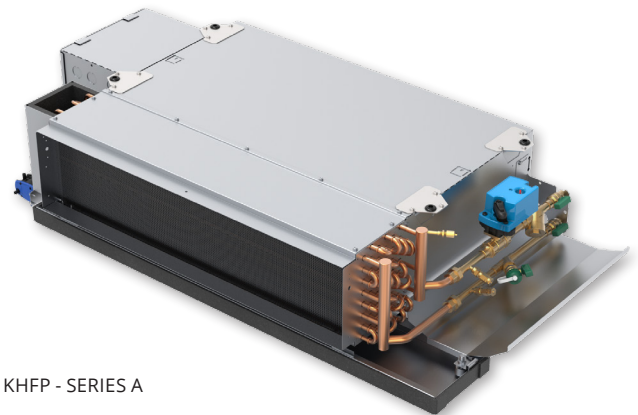

KHFP - SERIES A

KHF - SERIES A

Horizontal Fan Coil Units | Low Profile



PRODUCT DESCRIPTION | GENERAL INFORMATION

DESIGNED FOR MAXIMUM FLEXIBILITY

The extensive variety of standard options available on the KHF Series units are where you find the versatility to fit any HVAC system designer's needs.

Options include rear or bottom return, rear ducted return, solid or telescoping bottom panels for unit recessing, single wall stainless steel drain pans, electric heat and condensate pumps with single point power connection. All electric heat units are listed with cETLus as an assembly and carry the cETLus label.

Units comply with the latest edition of AHRI Standard 440 for testing and rating fan coil units, are certified, and display the AHRI symbol.

High efficiency motors, fan relays, disconnects and fusing mean easier coordination between mechanical and electrical trades.

Coil options allow for 2 through 6-row chilled water or 2 through 5-row DX cooling coils. 1 or 2-row hot water or standard steam coils may be placed in the preheat or reheat position.

Silent solid state relays are available for electric heat control in sound sensitive environments.

High static ECM option provides versatility and adjusts for applications that exceed .25" of external static pressure.

QUALITY PRODUCT

Concealed model (KHF Series) fan coil units are built from galvanized steel. Exposed model (KHFE) cabinetry is powder coated galvanized steel.

Standard insulation is 3/8" elastomeric closed cell foam, complying with UL 181 and NFPA 90A.

Units with or without electric heat are cETLus listed and labeled. All wiring is in compliance with NEC.

KHF Series fan coil units have a removable fan assembly. The entire fan assembly can be removed from the unit and serviced easily on a workbench.

CONVENIENT INSTALLATION

KHF Series fan coil units are shipped completely assembled, reducing field installation time and labor.


All units are thoroughly inspected and tested prior to shipment, reducing potential problems at startup. Motor wiring is brought to a junction box on the outside of the unit casing, reducing electrical hook-up time.

KHF Series fan coil units have an electrical enclosure on the side of the unit. The expansive compartment allows for easy access to electrical components, terminal blocks and wiring.

Factory furnished valve packages assure proper fit, operation and performance.


PRODUCT DESCRIPTION | CONSTRUCTION HIGHLIGHTS

ELECTRICAL ENCLOSURE: The bottom access electrical enclosure with additional side access provides access to a spacious electrical compartment. This compartment houses electric heat and control components. Terminal strips are furnished for simple power and control wiring connections. Multiple knockouts allow wiring entries from either side of the compartment.

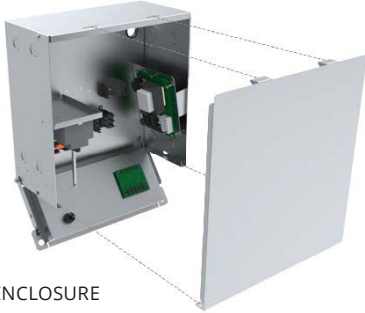


CONTROL ENCLOSURE

DRAIN PAN: The KHF Series drain pan is easily removable for cleaning, utilizing a patent-pending tool-free design. Standard drain pans are single wall galvanized steel with an option for stainless steel. Drain pans are available with a secondary drain connection. All drain pans are externally insulated with closed cell foam.

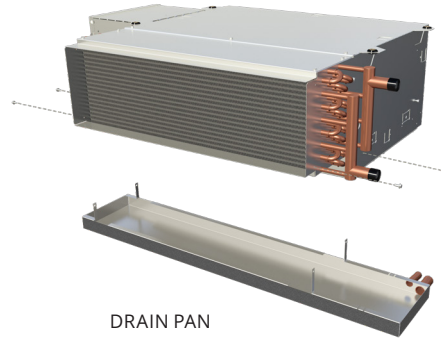


DRAIN PAN

FILTERS: 1" throwaway filters are tight fitting to prevent air bypass. Filters are easily removable from the bottom of the unit.

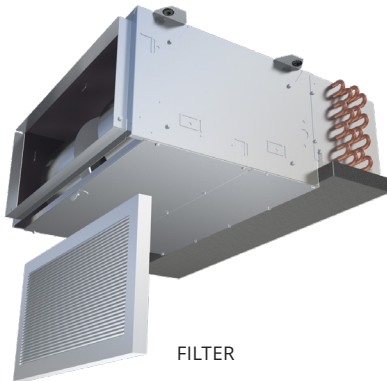


FILTER

TELESCOPING BOTTOM PANEL: The telescoping bottom panel allows for fully recessing the unit while permitting service access into the ceiling plenum. The architectural ceiling panel is finished with a durable powder coat paint.

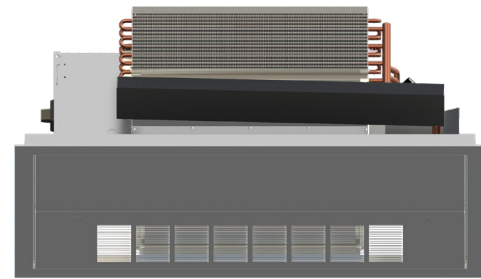


TELESCOPING BOTTOM PANEL

COILS: All fan coils are available in 2 or 4-pipe configurations. The heating coil may be placed in the reheat or preheat position. Heating and cooling coils are available with right, left or opposite side connections.

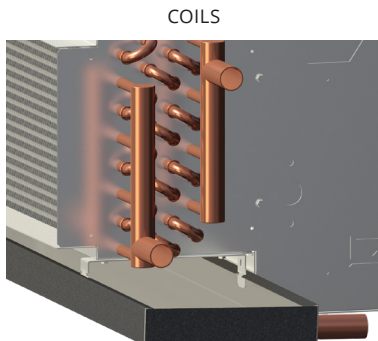

COILS

FAN DECK: The fan assembly is easily removed without disconnecting the duct work for service access to motors and blowers at, or away from, the unit.

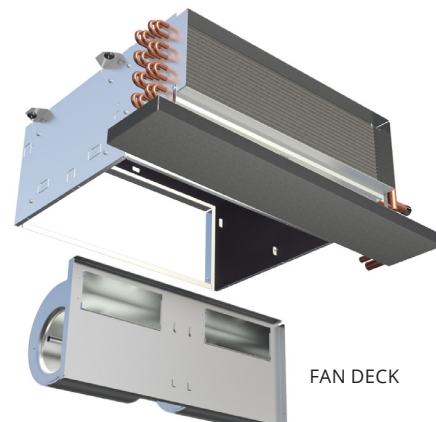

FAN DECK


KHF - SERIES A

Horizontal Fan Coil Units | Low Profile




PRODUCT DESCRIPTION | CONSTRUCTION HIGHLIGHTS (CONTINUED)

REMOVABLE BOTTOM PANELS: Bottom panels can be removed easily from underneath the unit to provide quick access to service motors, blowers, and electric heat.

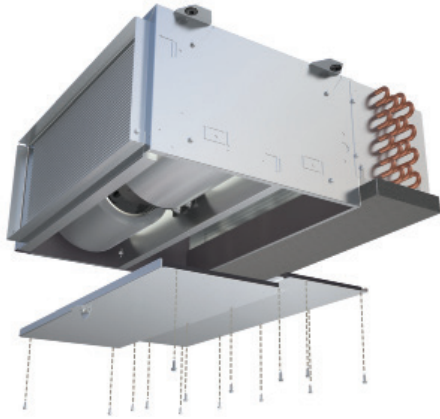

REMOVABLE BOTTOM PANEL

GULL WING DESIGN: Both KHFE side panels are hinged and can swing open to provide spacious access to service the valve package and electrical enclosure. For width restricted applications, the side panels can be completely removed while maintaining structural integrity of the unit.

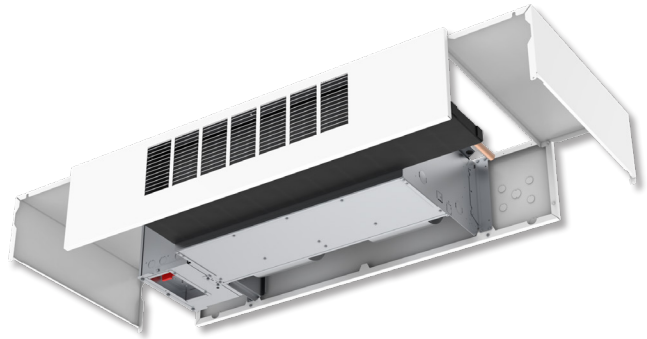

GULL WINGS (OPEN)

PRODUCT DESCRIPTION | FEATURES

STANDARD FEATURES

Construction

All Units

- AHRI 440 certified and labeled
- 3/8" elastomeric closed cell foam insulation
- Galvanized steel construction
- 1 1/2" duct discharge collar
- Four point hanger mounting brackets

Plenum Units

- Integral filter rack with 1" throwaway filter
- Integral rear return

Exposed Units

- Stamped louver supply and return air grilles
- Durable powder coat paint
- 18 gauge bottom panel construction

Coils

- Cooling - 2 to 6-row chilled water or 2 to 5-row DX, heat pump compatible
- Heating - 1 or 2-row hot water or steam - reheat or preheat position
- 6 total rows of cooling and heating coils maximum
- 3/8" coil tube diameter
- 10, 12 or 14 fins per inch
- High efficiency aluminum fin surface for optimizing heat transfer and air pressure drop
- Left or right-hand, same or opposite side connections on 4-pipe systems
- Access to entering and leaving air sides for cleaning
- Removable for service
- Manual air vents

Drain Pans

- Single wall, galvanized steel, externally insulated fire retardant and antimicrobial
- Double sloped to drain connection
- Tool-free removal
- 7/8" primary drain connection

Fan Assemblies

- Forwardly curved, DWDI centrifugal type
- 115 volt, 1-phase, 3-speed PSC motors
- Quick disconnect motor connections
- Removable fan/motor deck for service

Electrical

- cETLus listed for safety compliance
- Electrical junction box for field wiring terminations

Electric Heat

- cETLus listed as an assembly for safety compliance
- Integral electric heat assembly with removable elements for easy service
- Automatic reset primary and back-up secondary thermal limits
- Single point power connection

PRODUCT DESCRIPTION | FEATURES (CONTINUED)

OPTIONAL FEATURES

Construction

All Units

- Rubber isolated hanger brackets

Plenum Units

- Bottom return
- Rear ducted return
- 1" pleated filters (MERV 8 & 13)
- Spare 1" throwaway filters
- Telescoping bottom access panels

Exposed Units

- 1" pleated filters (MERV 8 & 13)
- Double deflection discharge grille
- Ducted supply and/or return

Coils

- 1/2" coil tube diameter
- Automatic air vents
- Stainless steel coil casings

Drain Pans

- Stainless steel construction with external insulation
- 5/8" secondary drain connection
- Auxiliary drip pans, galvanized or stainless steel

Condensate Pump

- Single point power
- Plenum rated
- Maintenance free
- Quiet operation

Fan Assemblies

- 277 volt, 1-phase, 3-speed PSC motors
- 115, 208-230 & 277V, 1-phase, 3-speed EC motors
- 115, 208-230 & 277V, 1-phase, high static 3-speed EC motors
- 115, 208-230 & 277V, 1-phase, variable speed EC motors

Electrical

- SCR fan speed controller (high speed only)
- Integrated circuit board with fan relays and on board transformer
- Toggle disconnect switch
- Condensate overflow switch (drain pan)
- Main fusing
- Unit and remote mounted 3-speed fan switches
- Freezestat
- Dirty filter switch
- Discharge air temperature sensor

Electric Heat

- Door interlocking disconnect switch
- Main fusing
- Silent relay/contactors

Piping Packages

- Factory assembled – shipped loose for field installation
- Unit mounted - shipped from factory with structural supports
- 1/2" and 3/4", 2 and 3-way normally closed, 2-position electric motorized valves
- Floating point modulating control valves
- 0-10V proportional control valves
- High pressure close-off actuators (125 PSIG)
- Isolation ball valves with memory stop
- Fixed flow control devices
- Unions and P/T ports
- Y strainer with blowdown

Thermostats

- Remote mounted analog, digital display or programmable
- 2 and 4-pipe control sequences
- Automatic and manual changeover
- Integral 3-speed fan switches
- 24V floating point control
- 0-10V proportional control

KHF - SERIES A

Horizontal Fan Coil Units | Low Profile



PRODUCT DESCRIPTION | FEATURES DETAIL

FAN COIL UNITS | HORIZONTAL, LOW PROFILE

KHF - SERIES A

Permanently lubricated, 3-tap, PSC fan motors designed for quiet and efficient operation

Optional ECM with standard and high static options

Single point power connection on all units including electric heat

Integral filter rack with 1" filter and integral rear (shown) or bottom return on all plenum units

1-1/2" duct collar allows quick field connection of duct work

Galvanized steel casing

3/8" elastomeric closed cell foam liner

cETLus and AHRI 440 listed and labeled

Drain pans can be easily removed for cleaning without the use of tools

Single wall galvanized or optional stainless steel drain pans are double sloped to drain connections

Optional secondary drain connection for added security (not shown)


Maximum 6 total rows of cooling

Bottom access to both entering and leaving sides of all coils for cleaning

Valve packages parallel to air flow for a more compact unit

Optional factory mounted valve packages

Optional factory mounted condensate pumps with single point power

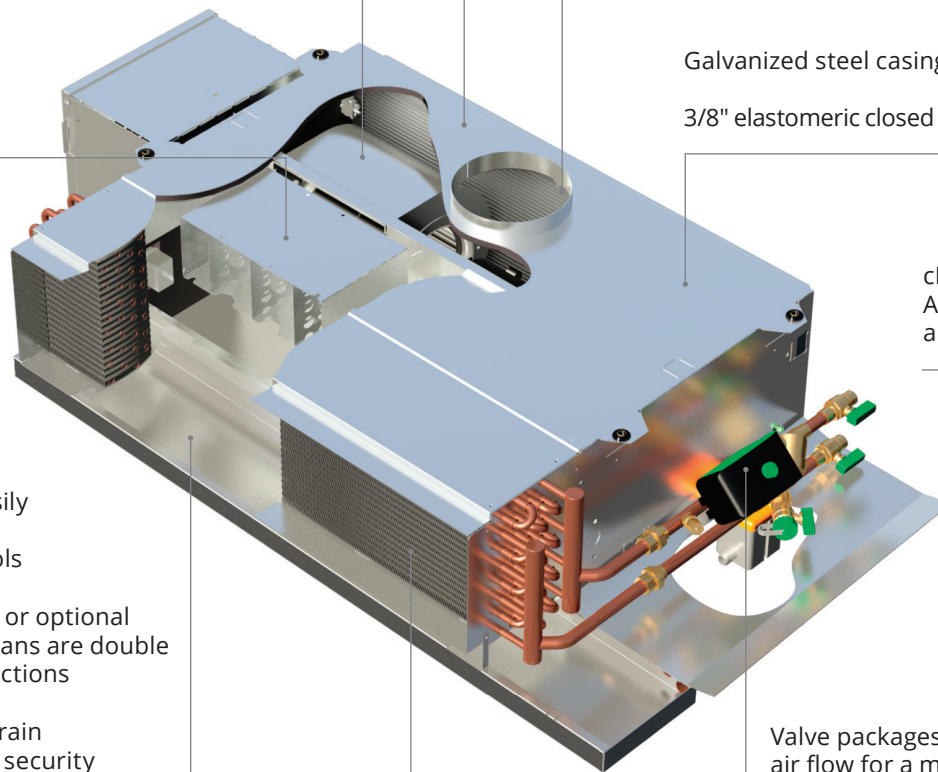

COIL DATA

COILS

Krueger offers hot water, chilled water, direct expansion (DX), and standard steam coils for specific application with all KHF Series Fan Coil Units.

STANDARD FEATURES

- Cooling - 2 to 6-row chilled water or 2 to 5-row DX
- Heating - 1 or 2-row hot water or steam
- 6 total rows of cooling and heating coils maximum
- Multiple circuiting options
- 10, 12 or 14 fins per inch
- High efficiency aluminum fin surface for optimizing heat transfer and pressure drop
- Left or right-hand, same or opposite side connections
- Manual air vents

OPTIONAL FEATURES

- Automatic air vents
- Stainless steel coil casings
- DX coils are heat pump compatible

FACE AREA, FREE AREA, AND FILTER SIZES

UNIT SIZE	COIL FACE AREA	RETURN AIR GRILLE FREE AREA	SUPPLY AIR GRILLE FREE AREA	FILTER FACE AREA (REAR RETURN)	NOMINAL FILTER SIZES (REAR RETURN)	FILTER FACE AREA (BOTTOM RETURN)	NOMINAL FILTER SIZES (BOTTOM RETURN)
02	0.89 [0.08]	0.83 [0.08]	0.61 [0.06]	1.17 [0.11]	16 x 10.5 x 1 [406 x 267 x 25]	1.06 [0.10]	16 x 9.5 x 1 [406 x 241 x 25]
03	1.07 [0.10]	0.83 [0.08]	0.61 [0.06]	1.39 [0.13]	19 x 10.5 x 1 [483 x 267 x 25]	1.25 [0.12]	19 x 9.5 x 1 [483 x 241 x 25]
04	1.35 [0.13]	1.25 [0.12]	0.92 [0.09]	1.77 [0.16]	24.25 x 10.5 x 1 [616 x 267 x 25]	1.60 [0.15]	24.25 x 9.5 x 1 [616 x 241 x 25]
06	1.72 [0.16]	1.45 [0.14]	1.07 [0.10]	2.26 [0.21]	31 x 10.5 x 1 [787 x 267 x 25]	2.05 [0.19]	31 x 9.5 x 1 [787 x 241 x 25]
08	2.11 [0.20]	1.87 [0.17]	1.38 [0.13]	2.77 [0.26]	(2) 19 x 10.5 x 1 [483 x 267 x 25]	2.51 [0.23]	(2) 19 x 9.5 x 1 [483 x 241 x 25]
09	2.35 [0.22]	2.08 [0.19]	1.53 [0.14]	3.08 [0.29]	(1) 20, (1) 22.25 x 10.5 x 1 [508, 565 x 267 x 25]	2.79 [0.26]	(1) 20, (1) 22.25 x 9.5 x 1 [508, 565 x 241 x 25]
10	2.89 [0.27]	2.70 [0.25]	1.99 [0.18]	3.79 [0.35]	(2) 26 x 10.5 x 1 [660 x 267 x 25]	3.43 [0.32]	(2) 26 x 9.5 x 1 [660 x 241 x 25]
12	3.33 [0.31]	3.12 [0.29]	2.30 [0.21]	4.38 [0.41]	(1) 20, (1) 40 x 10.5 x 1 [508, 1016 x 267 x 25]	3.96 [0.37]	(1) 20, (1) 40 x 9.5 x 1 [508, 1016 x 241 x 25]

NOTES: Face and free areas are in square feet [square meters]. Filter sizes are in inches [millimeters]. Return Air Grille Free Area applies to KHFE and telescoping bottom panel return grilles. Supply Air Grille Free Area applies to KHFE supply grille and minimum free area allowable for a supply grille supplied by others.

KHF - SERIES A

Horizontal Fan Coil Units | Low Profile



AHRI RATINGS

MODEL	SIZE	COIL		AIRFLOW CFM (DRY FLOW)	COOLING CAPACITY		WATER		POWER INPUT (Watts)
		ROWS	FPI		QT (BTUH)	QS (BTUH)	FLOW RATE (GPM)	WPD (ft-wg)	
KHFE	02	3	12	239	6700	5100	1.50	3.12	34
	02	4	12	228	8900	6200	2.00	7.15	34
	03	3	12	276	8500	6200	1.90	5.36	37
	03	4	12	260	8600	6400	1.90	2.05	37
	04	3	12	375	12500	8800	2.80	12.40	53
	04	4	12	350	12200	8900	2.80	2.11	53
	06	3	12	546	16800	12100	3.80	8.17	109
	06	4	12	513	19400	13600	4.40	6.18	109
	08	3	12	668	20000	14600	4.50	5.79	128
	08	4	12	640	23100	16300	5.20	4.95	128
	09	3	12	821	23300	17100	5.30	7.99	191
	09	4	12	773	26700	19100	6.10	6.74	191
	10	3	12	909	25400	19000	5.80	3.36	149
	10	4	12	832	28800	20900	6.50	2.37	149
12	3	12	1092	32400	23600	7.30	6.41	150	
12	4	12	1020	37800	26600	8.50	4.88	150	
KHFP	02	3	12	255	7100	5300	1.60	3.47	34
	02	4	12	242	9400	6500	2.10	7.67	34
	03	3	12	312	9300	6800	2.10	6.24	37
	03	4	12	292	9500	7000	2.10	2.48	37
	04	3	12	408	13300	9400	3.00	13.81	53
	04	4	12	378	13100	9500	2.90	2.39	53
	06	3	12	593	17800	12900	4.00	9.23	109
	06	4	12	553	20800	14500	4.70	7.16	109
	08	3	12	717	21000	15300	4.70	6.24	128
	08	4	12	683	24200	17200	5.40	5.37	128
	09	3	12	883	24400	18000	5.50	8.63	191
	09	4	12	821	27900	20000	6.30	7.23	191
	10	3	12	990	26800	20200	6.00	3.69	149
	10	4	12	897	30900	22300	7.00	2.80	149
12	3	12	1210	35100	25600	7.90	7.76	150	
12	4	12	1121	40500	28700	9.00	5.55	150	

NOTES: Based on 80°F DB and 67°F WB EAT, 45°F EWT, 10°F temperature rise, high fan speed. Motor type is ECM and motor voltage is 115/1/60. Airflow under dry coil conditions. Model KHFE tested at 0.0" external static pressure. Model KHFP tested at 0.05" external static pressure.

UNIT WEIGHTS

COMPONENT	UNIT SIZE								
	02	03	04	06	08	09	10	12	
KHFH BASE UNIT	22 [10]	25 [12]	33 [15]	43 [20]	53 [24]	60 [27]	74 [34]	83 [38]	
KHFP BASE UNIT	24 [11]	28 [13]	36 [16]	47 [21]	58 [26]	65 [30]	81 [37]	91 [41]	
KHFE BASE UNIT	56 [25]	63 [29]	75 [34]	92 [42]	108 [49]	118 [54]	141 [64]	158 [72]	
COIL ROWS	1 - DRY	6 [3]	7 [3]	8 [4]	10 [4]	11 [5]	13 [6]	15 [7]	17 [8]
	1 - WET	8 [4]	9 [4]	10 [4]	12 [5]	13 [6]	15 [7]	17 [8]	19 [9]
	2 - DRY	7 [3]	8 [4]	10 [4]	12 [5]	14 [6]	16 [7]	19 [9]	22 [10]
	2 - WET	9 [4]	10 [5]	12 [5]	14 [6]	17 [8]	19 [8]	23 [10]	27 [12]
	3 - DRY	8 [4]	10 [4]	12 [5]	14 [6]	17 [8]	19 [9]	23 [10]	26 [12]
	3 - WET	10 [5]	12 [5]	15 [7]	17 [8]	21 [10]	23 [10]	28 [13]	32 [14]
	4 - DRY	9 [4]	11 [5]	13 [6]	17 [8]	20 [9]	22 [10]	27 [12]	30 [14]
	4 - WET	13 [6]	15 [7]	18 [8]	22 [10]	26 [12]	28 [13]	34 [15]	38 [17]
	5 - DRY	11 [5]	13 [6]	15 [7]	19 [9]	23 [10]	25 [11]	30 [14]	35 [16]
	5 - WET	17 [8]	19 [8]	22 [10]	26 [12]	31 [14]	33 [15]	39 [18]	45 [20]
	6 - DRY	12 [5]	14 [6]	17 [8]	21 [10]	26 [12]	28 [13]	34 [16]	39 [18]
	6 - WET	19 [9]	21 [10]	25 [11]	29 [13]	36 [16]	38 [17]	45 [21]	51 [23]

NOTE: Unit weight data is in pounds [kilograms].

HEATING CAPACITY

UNIT SIZE	1-ROW			2-ROW		
	QS (MBH)	GPM	WPD	QS (MBH)	GPM	WPD
02	11.8	0.6	0.77	20.3	1.0	4.92
03	13.4	0.7	1.11	23.2	1.2	7.28
04	19.2	1.0	3.07	32.4	1.7	19.25
06	24.9	1.3	6.62	39.9	2.0	4.08
08	29.9	1.5	11.53	48.4	2.5	7.21
09	32.2	1.7	13.74	52.2	2.7	8.59
10	42.4	2.2	3.41	68.3	3.5	2.15
12	46.6	2.4	4.80	76.4	3.9	3.13

NOTE: Based on 70°F DB EAT, 180°F EWT, 40°F temperature drop, high fan speed.

KHF - SERIES A

Horizontal Fan Coil Units | Low Profile



ELECTRIC HEAT FEATURES & CAPACITIES

ELECTRIC HEAT STANDARD FEATURES

- cETLus listed as an assembly for safety compliance
- Single point power connection
- Mounted in preheat position
- Automatic reset primary and back-up secondary thermal limits
- Internal wiring rated at 105°C
- Integral electric heat assembly with removable element for easy service
- Stainless steel terminals and hardware



OPTIONAL FEATURES

- Silent solid state relays
- Manual reset secondary limits
- Door interlocking disconnect switch
- Main fusing (Branch fusing for EH>48 amps)

ELECTRICAL CALCULATIONS INFORMATION

- Contact your local Krueger representative for assistance with MCA and/or MOP calculations
- Non-fused door interlock disconnect switch shall be sized according to MCA
- Fused door interlock disconnect switch and main fusing shall be sized according to MOP

USEFUL FORMULAS

$$kW^* = (CFM \times \Delta T \times 1.085^{**}) / 3413$$

$$1\emptyset \text{ AMPs} = (kW \times 1000) / \text{Volts}$$

$$* 1kW = 3413 \text{ BTU/H}$$

$$** \text{ Capacity at sea level}$$

Altitude Considerations:

Reduce by 0.034 for each 1000 ft. of altitude above sea level.

Example:

$$5000 \text{ ft.} / 1000 \text{ ft.} = 5$$

$$5 \times 0.034 = 0.17$$

$$1.085 - 0.17 = 0.915$$

ELECTRIC HEAT FEATURES & CAPACITIES (CONTINUED)

UNIT SIZE	MBH	3.4	5.1	6.8	10.2	13.6	17.1	20.5	23.9	27.3	30.7	34.1	40.9
	kW	1	1.5	2	3	4	5	6	7	8	9	10	12
	VOLTS	AMPS											
02	115	8.7	13	17.4									
	208	4.8	7.2	9.6									
	230	4.3	6.5	8.7									
	277	3.6	5.4	7.2									
03	115	8.7	13	17.4									
	208	4.8	7.2	9.6	14.4								
	230	4.3	6.5	8.7	13								
	277	3.6	5.4	7.2	10.8								
04	115	8.7	13	17.4	26.1								
	208	4.8	7.2	9.6	14.4								
	230	4.3	6.5	8.7	13								
	277	3.6	5.4	7.2	10.8								
06	115	8.7	13	17.4	26.1								
	208	4.8	7.2	9.6	14.4	19.2	24	28.8					
	230	4.3	6.5	8.7	13	17.4	21.7	26.1					
	277	3.6	5.4	7.2	10.8	14.4	18.1	21.7					
08	115	8.7	13	17.4	26.1								
	208	4.8	7.2	9.6	14.4	19.2	24	28.8	33.7				
	230	4.3	6.5	8.7	13	17.4	21.7	26.1	30.4				
	277	3.6	5.4	7.2	10.8	14.4	18.1	21.7	25.3				
09	115	8.7	13	17.4	26.1								
	208	4.8	7.2	9.6	14.4	19.2	24	28.8	33.7				
	230	4.3	6.5	8.7	13	17.4	21.7	26.1	30.4				
	277	3.6	5.4	7.2	10.8	14.4	18.1	21.7	25.3				
10	115	8.7	13	17.4	26.1								
	208	4.8	7.2	9.6	14.4	19.2	24	28.8	33.7	38.5			
	230	4.3	6.5	8.7	13	17.4	21.7	26.1	30.4	34.8			
	277	3.6	5.4	7.2	10.8	14.4	18.1	21.7	25.3	28.9			
12	115	8.7	13	17.4	26.1	34.8							
	208	4.8	7.2	9.6	14.4	19.2	24	28.8	33.7	38.5	43.3		
	230	4.3	6.5	8.7	13	17.4	21.7	26.1	30.4	34.8	39.1	43.5	
	277	3.6	5.4	7.2	10.8	14.4	18.1	21.7	25.3	28.9	32.5	36.1	43.3

NOTES: Shaded areas of the electric heat selection chart indicate kW and voltage options not available. Available voltages are 1-phase, 60 hertz. Size heater for Leaving Air Temperature (LAT) less than 104°F. Silent, solid state heater relay is available for sound sensitive environments. Ask your Krueger representative about continuously modulating electric heat using SSR and special control options. 70 CFM of airflow must be maintained per 1 KW of electric heat to prevent nuisance tripping of limit switches.

FAN COIL UNITS | HORIZONTAL, LOW PROFILE


KHF - SERIES A

KHF - SERIES A

Horizontal Fan Coil Units | Low Profile







DIMENSIONAL DATA | KHFH | EXTERNAL SPACE REQUIREMENTS

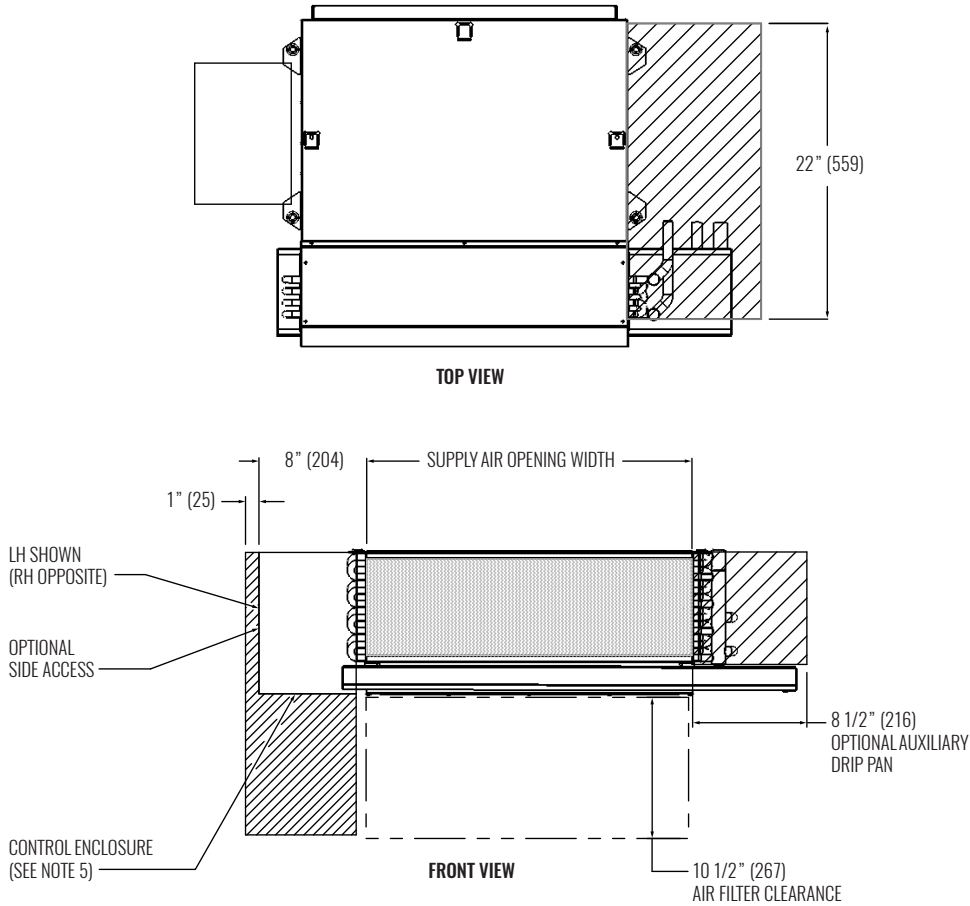

NOTES: All chilled water piping that projects beyond the condensate pan or the optional auxiliary drip pan must be field insulated by others. Auxiliary drip pan shown above is optional, and is mounted on the outlet side of the drain pan. Drain pan is installed with the outlet tube(s) on cooling coil connection end of coil on 4-pipe units with optional opposite end connection. Dimensions shown on this drawing apply to standard CW and HW valve packages. Refer to the Piping Package Catalog for valve package code details. Contact factory for details on valve packages using non-standard or customer furnished components. Provide sufficient clearance to access electrical components and comply with all applicable codes and ordinances.

DIMENSIONAL DATA | KHFH | COOLING AND ELECTRIC HEAT

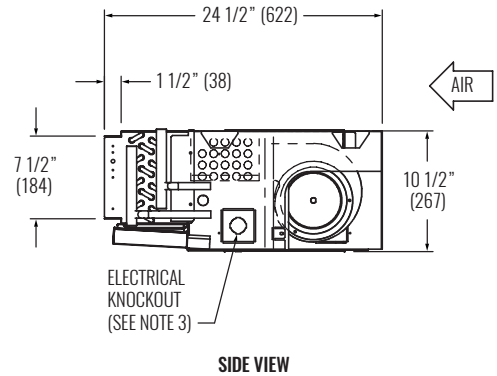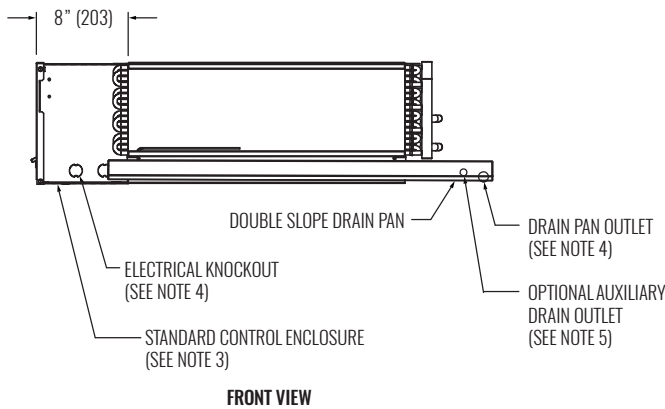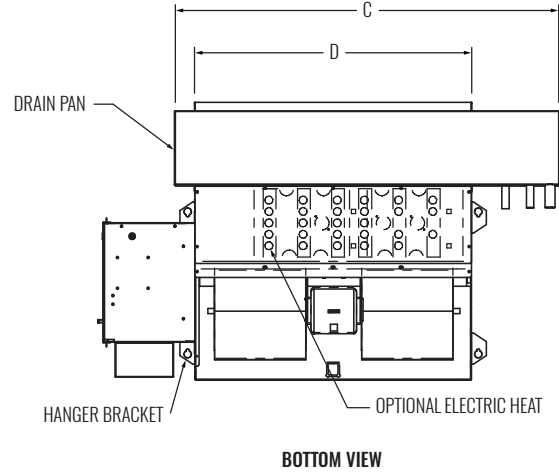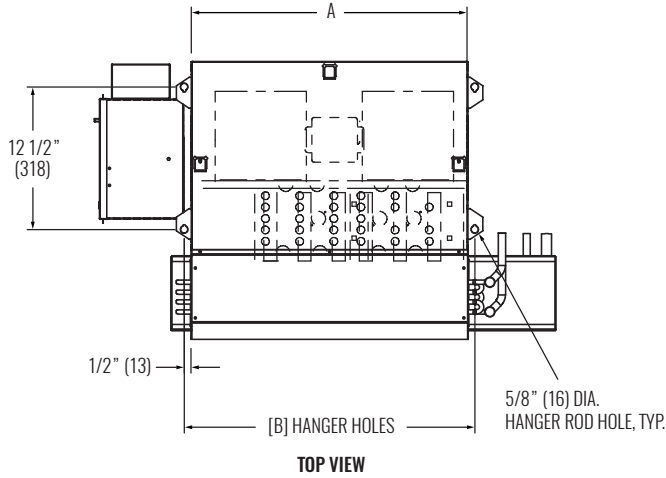

UNIT SIZE	A	B	C	D
02	16" (406)	17 1/4" (438)	25 1/4" (641)	16" (406)
03	19 1/4" (489)	20 1/2" (521)	28 1/2" (724)	19 1/4" (489)
04	24 1/4" (616)	25 1/2" (648)	33 1/2" (851)	24 1/4" (616)
06	31" (787)	32 1/4" (819)	40 1/4" (1022)	31" (787)
08	38" (965)	39 1/4" (997)	47 1/4" (1200)	38" (965)
09	42 1/4" (1073)	43 1/2" (1105)	51 1/2" (1308)	42 1/4" (1073)
10	52" (1321)	53 1/4" (1353)	61 1/4" (1556)	52" (1321)
12	60" (1524)	61 1/4" (1556)	69 1/4" (1759)	60" (1524)





NOTES: All dimensions in Inches (millimeters). All dimensions $\pm 1/4"$ (6mm). Metric values are soft conversion. Left-hand unit shown, right-hand unit opposite. Standard control enclosure is mounted on unit side opposite cooling coil connections. Unit casing includes (2) knockouts on one side and (1) knockout on another side. Provide sufficient clearance to access electrical controls and comply with applicable codes and ordinances. Standard externally foam coated galvanized steel drain pan has 7/8" ODM copper outlet. Stainless steel drain pan has 3/4" MPT galvanized steel outlet. Standard galvanized steel auxiliary drain pan has 5/8" ODM copper outlet. Stainless steel auxiliary drain pan has 3/4" MPT galvanized steel outlet. See coil connection drawings for coil connection sizes and locations.

KHF - SERIES A

Horizontal Fan Coil Units | Low Profile







DIMENSIONAL DATA | KHFH | ELECTRIC HEAT ONLY

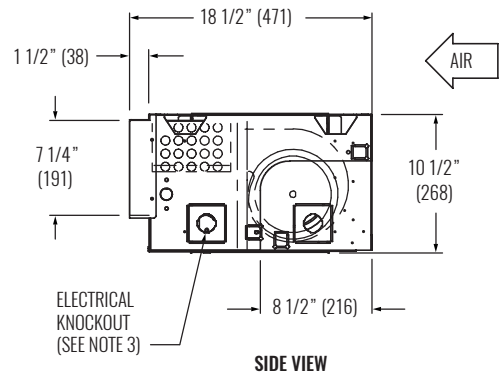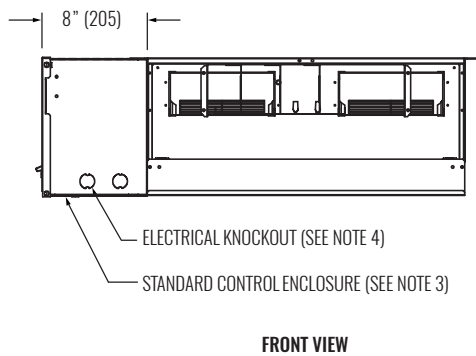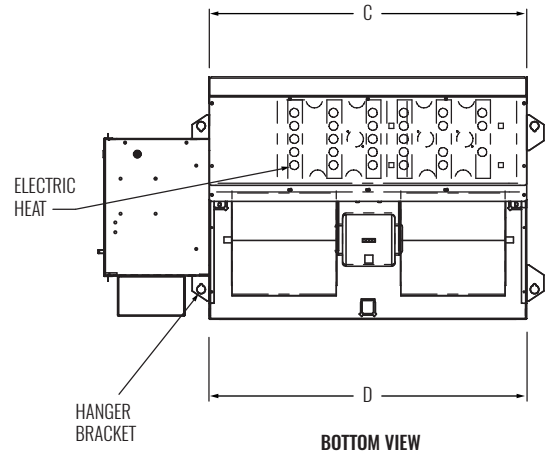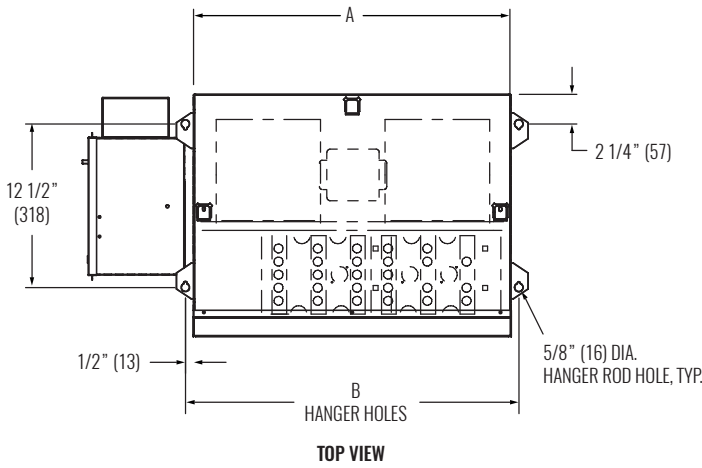

UNIT SIZE	A	B	C	D
02	16" (406)	17 1/4" (438)	16" (406)	13 3/16" (335)
03	19 1/4" (489)	20 1/2" (521)	19 1/4" (489)	16 7/16" (418)
04	24 1/4" (616)	25 7/16" (646)	24 1/4" (616)	22 11/16" (576)
06	31" (787)	32 1/4" (819)	31" (787)	29 7/16" (748)
08	38" (965)	39 1/4" (997)	38" (965)	36 7/16" (925)
09	42 1/4" (1073)	43 5/16" (1100)	42 1/4" (1073)	40 1/2" (1029)
10	52" (1321)	53 1/4" (1353)	52" (1321)	50 7/16" (1281)
12	60" (1524)	60 1/4" (1530)	60" (1524)	57 1/2" (1461)

NOTES: All dimensions in Inches (millimeters). All dimensions $\pm 1/4"$ (6mm). Metric values are soft conversion. Left-hand unit shown, right-hand unit opposite. Standard control enclosure is mounted on unit side opposite cooling coil connections. Unit casing includes (2) knockouts on each side. Provide sufficient clearance to access electrical controls and comply with applicable codes and ordinances.

DIMENSIONAL DATA | KHFH | SOLID BOTTOM ACCESS PANEL

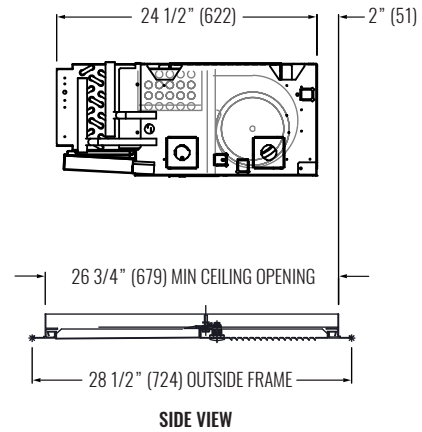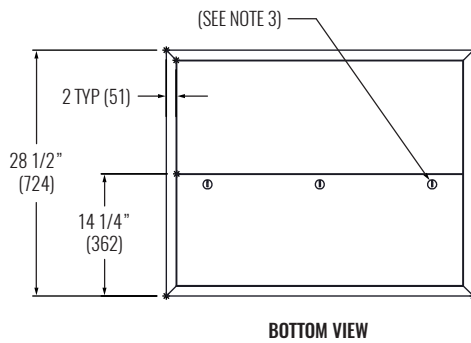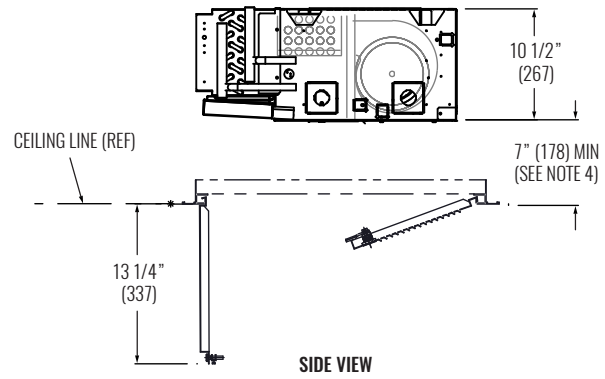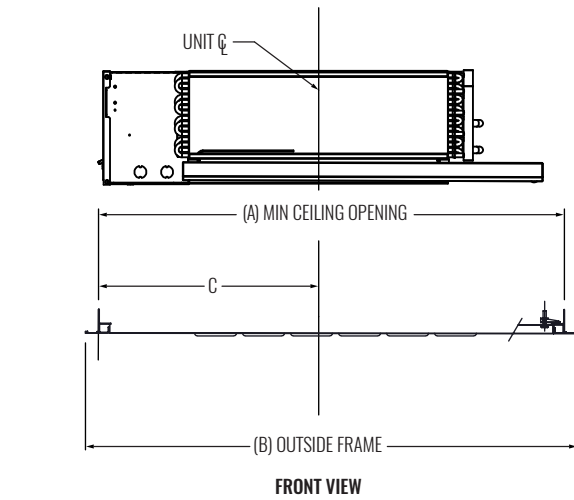

UNIT SIZE	A	B	C
02	38 1/4" (972)	40 1/4" (1022)	19 1/8" (486)
03	41 1/2" (1054)	43 1/2" (1105)	20 3/4" (527)
04	46 1/2" (1181)	48 1/2" (1232)	23 1/4" (591)
06	53 1/4" (1353)	55 1/4" (1403)	26 5/8" (676)
08	60 1/4" (1530)	62 1/4" (1581)	30 1/8" (765)
09	64 1/2" (1638)	66 1/2" (1689)	32 1/4" (819)
10	74 1/4" (1885)	76 1/4" (1937)	37 1/8" (943)
12	82 1/4" (2089)	84 1/4" (2140)	41 1/8" (1045)



NOTES: All dimensions in Inches (millimeters). All dimensions $\pm 1/4"$ (6mm). Metric values are soft conversion. Left-hand unit shown, right-hand unit opposite. 1/4 turn latch, (2) qty for standard sizes, (3) qty for sizes 10-12. Please reference the external feature space requirements submittal for complete service space requirements. Service access may be limited based on the panels installed in relation to the unit.

KHF - SERIES A

Horizontal Fan Coil Units | Low Profile







DIMENSIONAL DATA | KHFP | EXTERNAL SPACE REQUIREMENTS

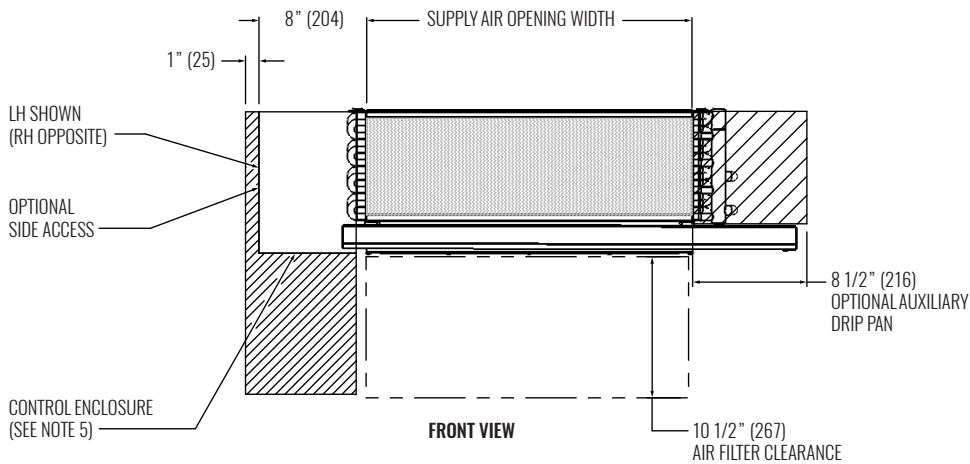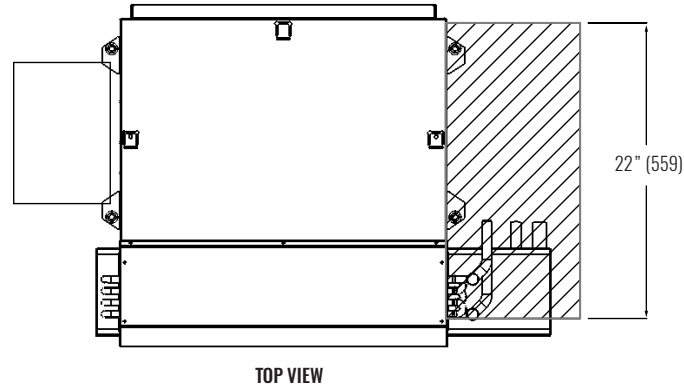

NOTES: All chilled water piping that projects beyond the condensate pan or the optional auxiliary drip pan must be field insulated by others. Auxiliary drip pan shown above is optional, and is mounted on the outlet side of the drain pan. Drain pan is installed with the outlet tube(s) on cooling coil connection end of coil on 4-pipe units with optional opposite end connection. Dimensions shown on this drawing apply to standard CW and HW valve packages. Refer to the Piping Package Catalog for valve package code details. Contact factory for details on valve packages using non-standard or customer furnished components. Provide sufficient clearance to access electrical components and comply with all applicable codes and ordinances.

DIMENSIONAL DATA | KHFP | COOLING AND ELECTRIC HEAT

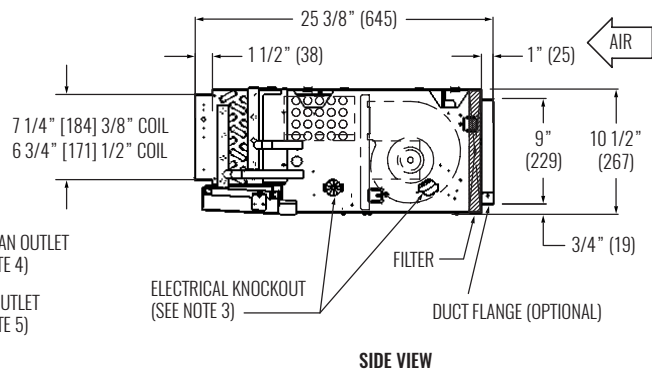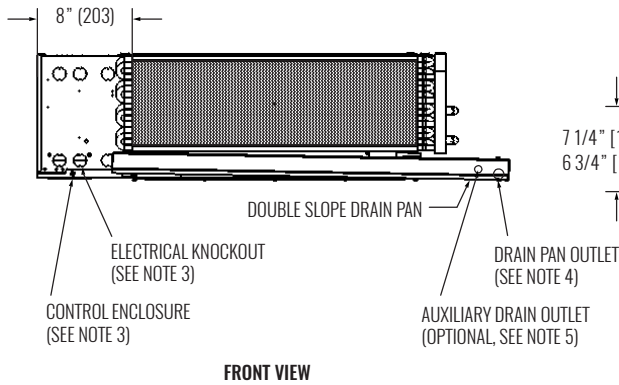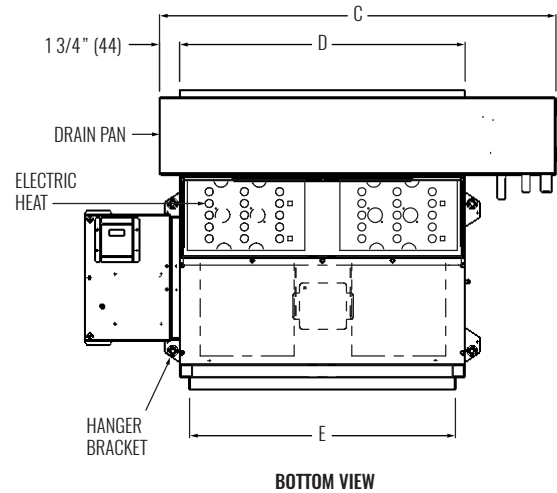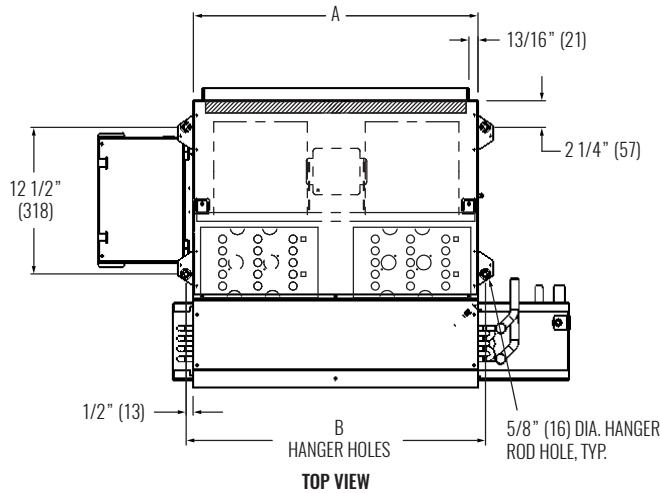

UNIT SIZE	A	B	C	D	E
02	16" (406)	17 1/4" (438)	25 1/2" (648)	16" (406)	14 3/8" (365)
03	19 1/4" (489)	20 1/2" (521)	28 3/4" (730)	19 1/4" (489)	17 5/8" (448)
04	24 1/4" (616)	25 1/2" (648)	33 3/4" (857)	24 1/4" (616)	22 5/8" (575)
06	31" (787)	32 1/4" (819)	40 1/2" (1029)	31" (787)	29 3/8" (746)
08	38" (965)	39 1/4" (997)	47 1/2" (1206)	38" (965)	36 3/8" (924)
09	42 1/4" (1073)	43 1/2" (1105)	51 3/4" (1314)	42 1/4" (1073)	40 5/8" (1032)
10	52" (1321)	53 1/4" (1353)	61 1/2" (1562)	52" (1321)	50 3/8" (1280)
12	60" (1524)	61 1/4" (1556)	69 1/2" (1765)	60" (1524)	58 3/8" (1483)





NOTES: All dimensions in Inches (millimeters). All dimensions $\pm 1/4"$ (6mm). Metric values are soft conversion. Left-hand unit shown, right-hand unit opposite. Standard control enclosure is mounted on unit side opposite cooling coil connections. Unit casing includes (6) knockouts on each side. Provide sufficient clearance to access electrical controls and comply with applicable codes and ordinances. Standard externally foam coated galvanized steel drain pan has 7/8" ODM copper outlet. Stainless steel drain pan has 3/4" MPT galvanized steel outlet. Standard galvanized steel auxiliary drain pan has 5/8" ODM copper outlet. Stainless steel auxiliary drain pan has 3/8" MPT galvanized steel outlet. See coil connection drawings for coil connection sizes and locations.

KHF - SERIES A

Horizontal Fan Coil Units | Low Profile







DIMENSIONAL DATA | KHFP | ELECTRIC HEAT ONLY

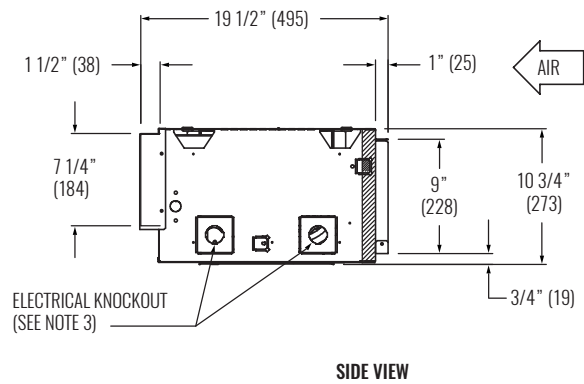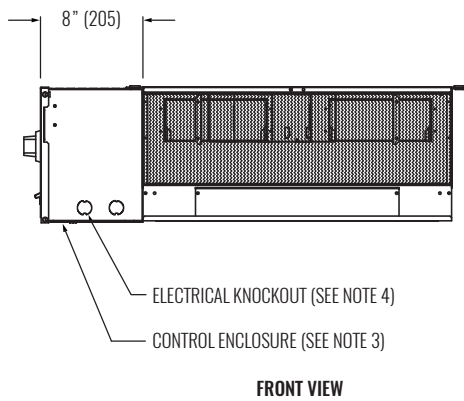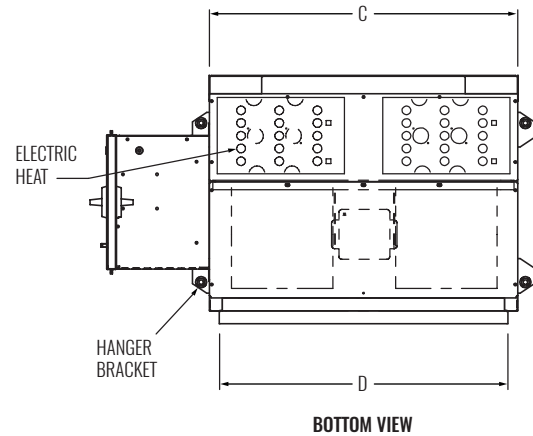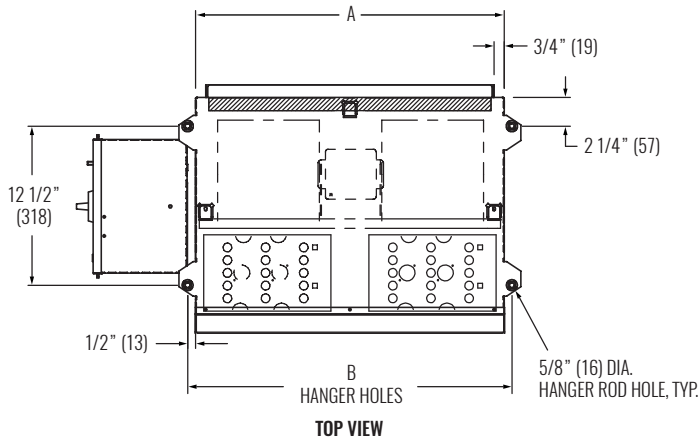

UNIT SIZE	A	B	C	D
02	16" (406)	17 1/4" (438)	16" (406)	13 3/16" (335)
03	19 1/4" (489)	20 1/2" (521)	19 1/4" (489)	16 7/16" (418)
04	24 1/4" (616)	25 7/16" (646)	24 1/4" (616)	22 11/16" (576)
06	31" (787)	32 1/4" (819)	31" (787)	29 7/16" (748)
08	38" (965)	39 1/4" (997)	38" (965)	36 7/16" (925)
09	42 1/4" (1073)	43 5/16" (1100)	42 1/4" (1073)	40 1/2" (1029)
10	52" (1321)	53 1/4" (1353)	52" (1321)	50 7/16" (1281)
12	60" (1524)	60 1/4" (1530)	60" (1524)	57 1/2" (1461)

NOTES: All dimensions in Inches (millimeters). All dimensions $\pm 1/4"$ (6mm). Metric values are soft conversion. Left-hand unit shown, right-hand unit opposite. Standard control enclosure is mounted on unit side opposite cooling coil connections. Unit casing includes (2) knockouts on each side. Provide sufficient clearance to access electrical controls and comply with applicable codes and ordinances.

DIMENSIONAL DATA | KHFP | BOTTOM RETURN

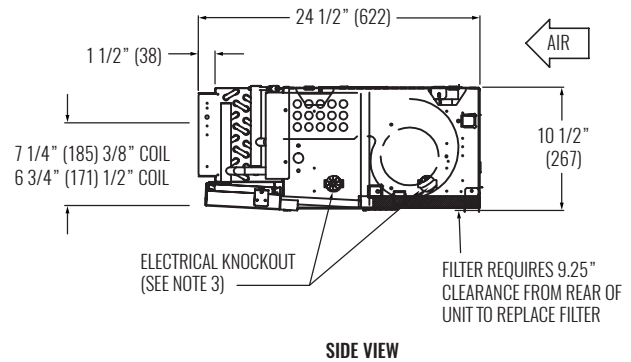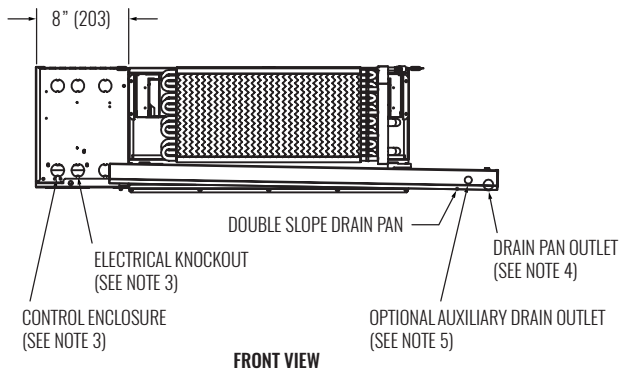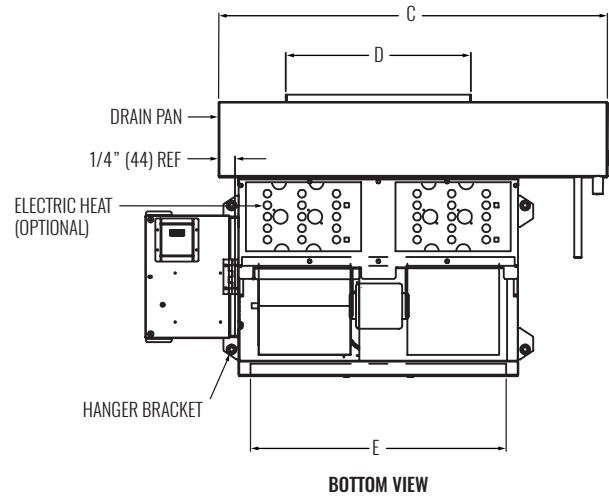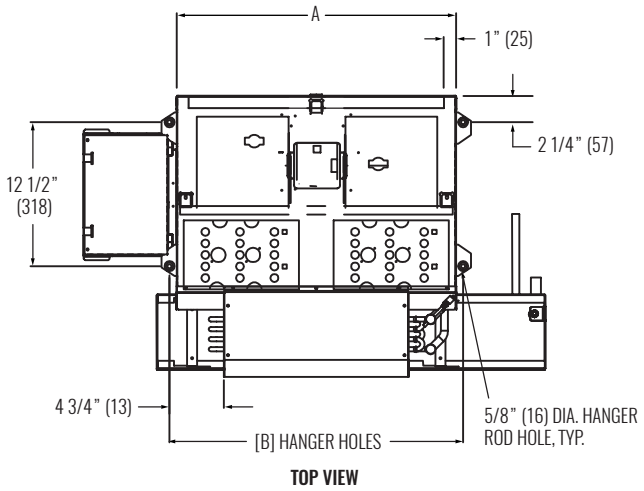

UNIT SIZE	A	B	C	D	E
02	16" (406)	17 1/4" (438)	25 1/4" (641)	16" (406)	13 3/16" (335)
03	19 1/4" (489)	20 1/2" (521)	28 1/2" (724)	19 1/4" (489)	16 7/16" (418)
04	24 1/4" (616)	25 1/2" (648)	33 1/2" (851)	24 1/4" (616)	22 11/16" (576)
06	31" (787)	32 1/4" (819)	40 1/4" (1022)	31" (787)	29 7/16" (748)
08	38" (965)	39 1/4" (997)	47 1/4" (1200)	38" (965)	36 7/16" (925)
09	42 1/4" (1073)	43 1/2" (1105)	51 1/2" (1308)	42 1/4" (1073)	40 1/2" (1029)
10	52" (1321)	53 1/4" (1353)	61 1/4" (1556)	52" (1321)	50 7/16" (1281)
12	60" (1524)	60 1/4" (1530)	69 1/4" (1759)	60" (1524)	57 1/2" (1461)

NOTES: All dimensions in Inches (millimeters). All dimensions $\pm 1/4"$ (6mm). Metric values are soft conversion. Left-hand unit shown, right-hand unit opposite. Standard control enclosure is mounted on unit side opposite cooling coil connections. Unit casing includes (6) knockouts on each side. Provide sufficient clearance to access electrical controls and comply with applicable codes and ordinances. Standard externally foam coated galvanized steel drain pan has 7/8" ODM copper outlet. Stainless steel drain pan has 3/4" MPT galvanized steel outlet. Auxiliary drain outlet is 5/8" ODM copper or 3/8" MPT galvanized steel respectively. See coil connection drawings for coil connection sizes and locations.





FAN COIL UNITS | HORIZONTAL, LOW PROFILE
KHF - SERIES A

KHF - SERIES A

Horizontal Fan Coil Units | Low Profile







DIMENSIONAL DATA | KHFP | SOLID BOTTOM ACCESS PANEL

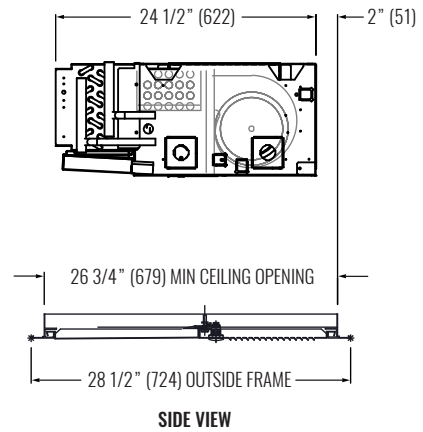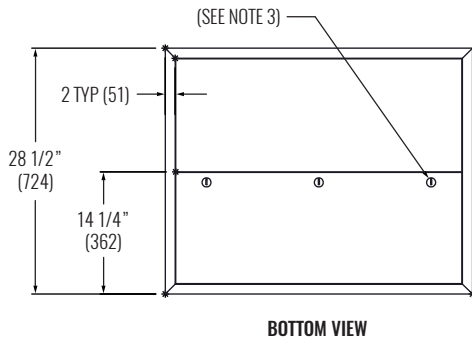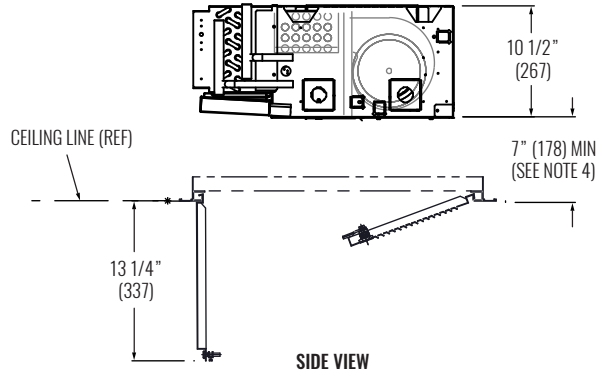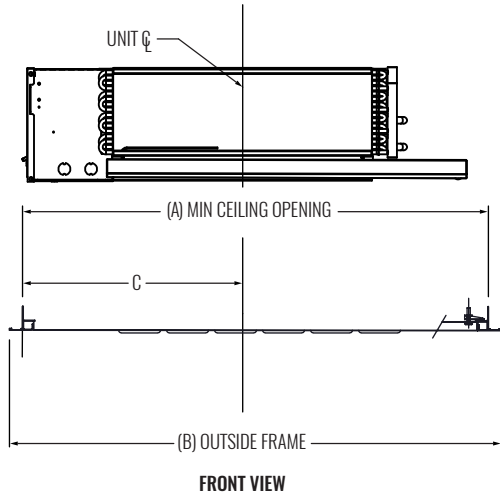

UNIT SIZE	A	B	C
02	38 1/4" (972)	40 1/4" (1022)	19 1/8" (486)
03	41 1/2" (1054)	43 1/2" (1105)	20 3/4" (527)
04	46 1/2" (1181)	48 1/2" (1232)	23 1/4" (591)
06	53 1/4" (1353)	55 1/4" (1403)	26 5/8" (676)
08	60 1/4" (1530)	62 1/4" (1581)	30 1/8" (765)
09	64 1/2" (1638)	66 1/2" (1689)	32 1/4" (819)
10	74 1/4" (1885)	76 1/4" (1937)	37 1/8" (943)
12	82 1/4" (2089)	84 1/4" (2140)	41 1/8" (1045)

NOTES: All dimensions in Inches (millimeters). All dimensions $\pm 1/4"$ (6mm). Metric values are soft conversion. Left-hand unit shown, right-hand unit opposite. 1/4 turn latch, (2) qty for standard sizes, (3) qty for sizes 10⁻¹². Please reference the external feature space requirements submittal for complete service space requirements. Service access may be limited based on the panels installed in relation to the unit.

DIMENSIONAL DATA | KHFP | TELESCOPING PANEL

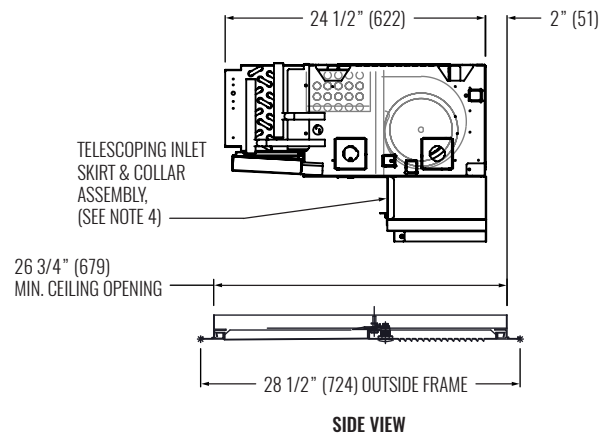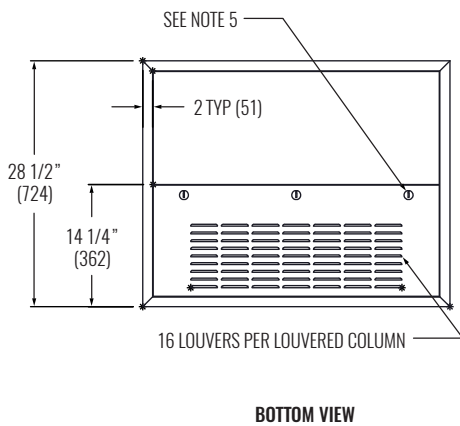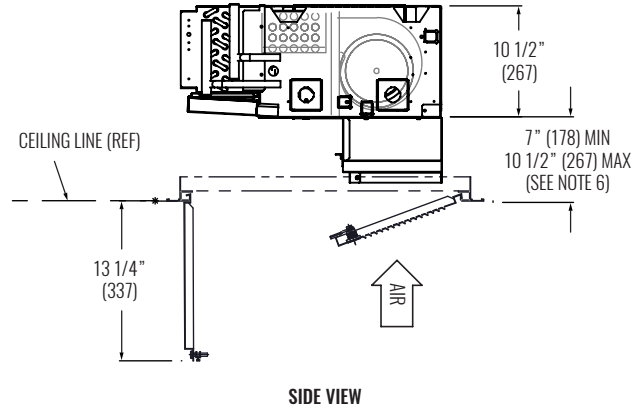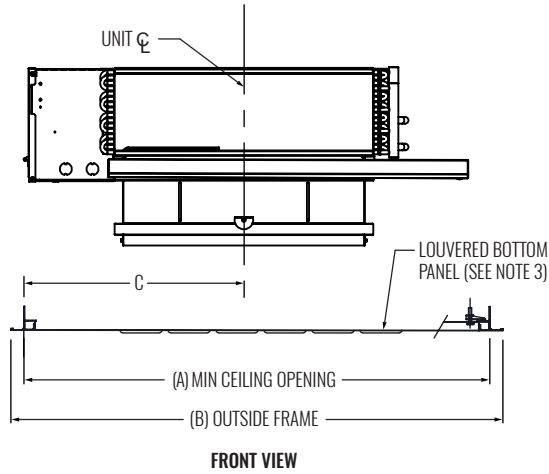

UNIT SIZE	A	B	C
02	38 1/4" (972)	40 1/4" (1022)	19 1/8" (486)
03	41 1/2" (1054)	43 1/2" (1105)	20 3/4" (527)
04	46 1/2" (1181)	48 1/2" (1232)	23 1/4" (591)
06	53 1/4" (1353)	55 1/4" (1403)	26 5/8" (676)
08	60 1/4" (1530)	62 1/4" (1581)	30 1/8" (765)
09	64 1/2" (1638)	66 1/2" (1689)	32 1/4" (819)
10	74 1/4" (1885)	76 1/4" (1937)	37 1/8" (943)
12	82 1/4" (2089)	84 1/4" (2140)	41 1/8" (1045)

NOTES: All dimensions in Inches (millimeters). All dimensions $\pm 1/4"$ (6mm). Metric values are soft conversion. Left-hand unit shown, right-hand unit opposite. Portions of the inlet louver not directly below unit inlet may require covering in the field on applications where infiltration of ceiling plenum air into space is undesired. Telescoping skirt and collar assembly must be field adjusted to assure a proper fit between filter frame and louvered inlet panel assembly. 1/4 turn latch, (2) qty for standard sizes, (3) qty for sizes 10⁻¹². Please reference the external feature space requirements submittal for complete service space requirements. Service access may be limited based on the panels installed in relation to the unit.

KHF - SERIES A






Horizontal Fan Coil Units | Low Profile



DIMENSIONAL DATA | KHFE | REAR RETURN

FAN COIL UNITS | HORIZONTAL, LOW PROFILE







KHF - SERIES A

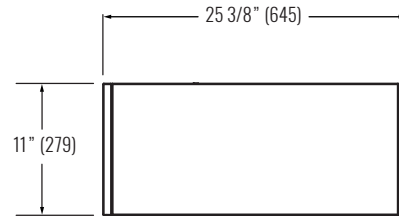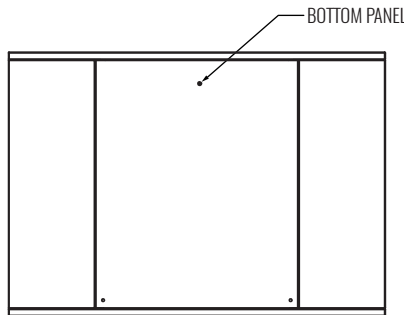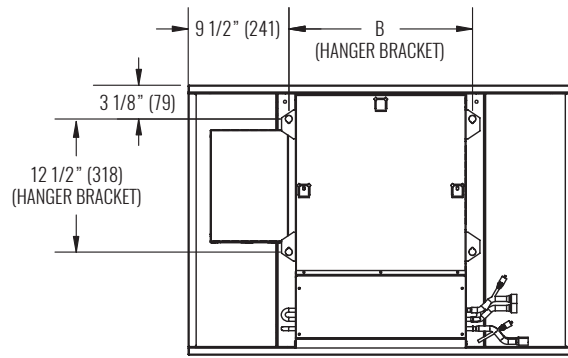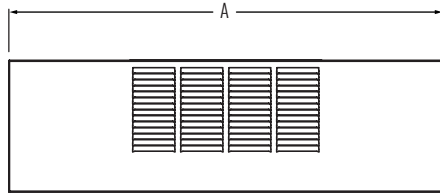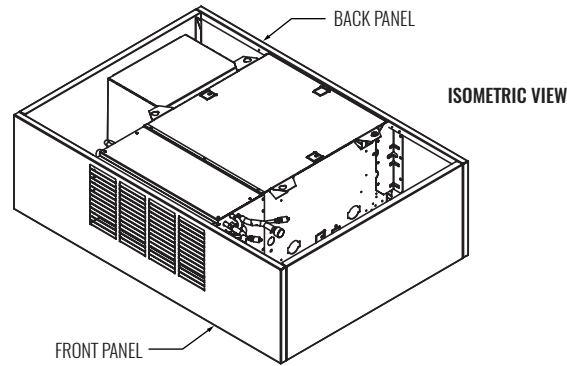

UNIT SIZE	A	B
02	36 1/4" (921)	17 1/4" (438)
03	39 1/2" (1003)	20 1/2" (521)
04	44 1/2" (1130)	25 1/2" (648)
06	51 1/4" (1302)	32 1/4" (819)
08	58 1/4" (1480)	39 1/4" (997)
09	62 1/2" (1588)	43 1/2" (1105)
10	72 1/4" (1835)	53 1/4" (1353)
12	80 1/4" (2038)	61 1/4" (1556)

NOTES: All dimensions are inches (millimeters). All dimensions $\pm 1/4"$ (6mm). Metric values are soft conversions. Left-hand unit shown, right-hand unit opposite. Provide sufficient clearance to access electrical controls and comply with applicable codes and ordinances. Drain piping should be routed through casing opening indicated to provide proper slope. Bottom panel removable for access to filter and fan assembly. Corner panels are removable to access electrical enclosure, coil and valve pack. Internal insulation of field piping may be required. Field piping casing penetrations must be cut in the field to match individual job requirements. All dimensions also apply to units with Electric Heat Only.

DIMENSIONAL DATA | KHFE | REAR RETURN (CONTINUED)

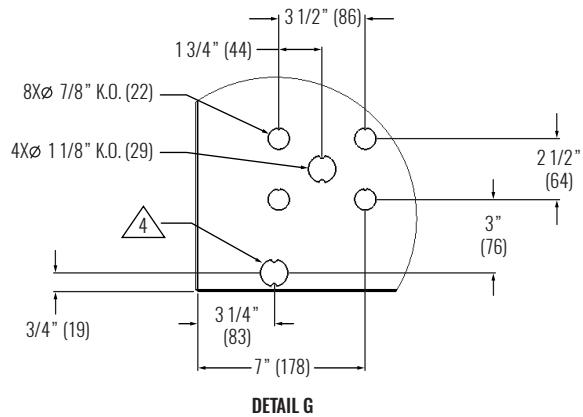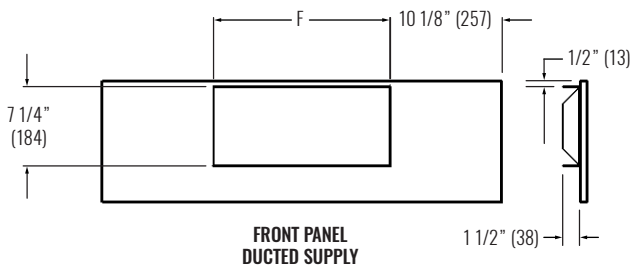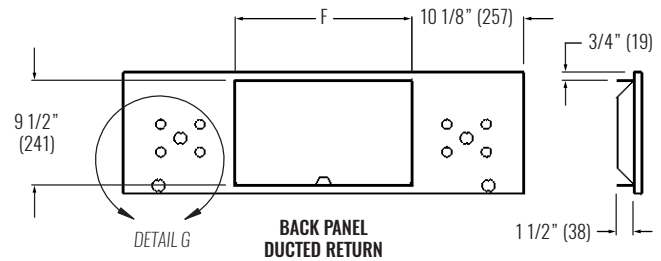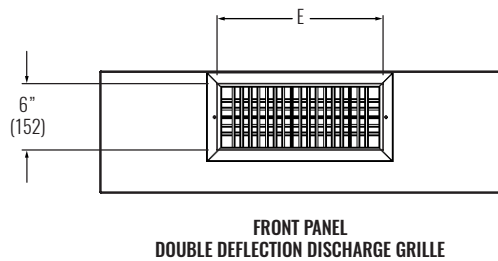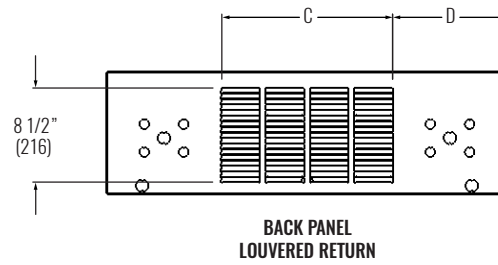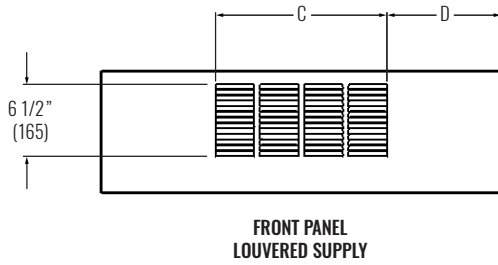

UNIT SIZE	C	D	E	F
02	15 1/2" (394)	10 3/8" (264)	15" (381)	16" (406)
03	15 1/2" (394)	12" (305)	18" (457)	19 1/4" (489)
04	23 1/2" (597)	10 1/2" (267)	23" (584)	24 1/4" (616)
06	27 1/2" (699)	11 7/8" (302)	30" (762)	31" (787)
08	35 1/2" (902)	11 3/8" (289)	37" (940)	38" (965)
09	39 1/2" (1003)	11 1/2" (292)	41" (1041)	42 1/4" (1073)
10	51 1/2" (1308)	10 3/8" (264)	23" (584)	52" (1321)
12	59 1/2" (1511)	10 3/8" (264)	27" (686)	60" (1524)

NOTES: All dimensions are inches (millimeters). All dimensions $\pm 1/4"$ (6mm). Metric values are soft conversions. Left-hand unit shown, right-hand unit opposite. Provide sufficient clearance to access electrical controls and comply with applicable codes and ordinances. Drain piping should be routed through casing opening indicated to provide proper slope. Bottom panel removable for access to filter and fan assembly. Corner panels are removable to access electrical enclosure, coil and valve pack. Internal insulation of field piping may be required. Field piping casing penetrations must be cut in the field to match individual job requirements. All dimensions also apply to units with Electric Heat Only.

KHF - SERIES A






Horizontal Fan Coil Units | Low Profile



DIMENSIONAL DATA | KHFE | BOTTOM RETURN

FAN COIL UNITS | HORIZONTAL, LOW PROFILE


KHF - SERIES A

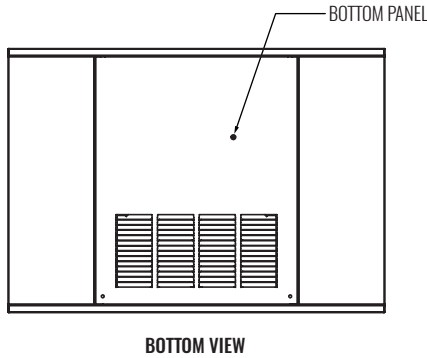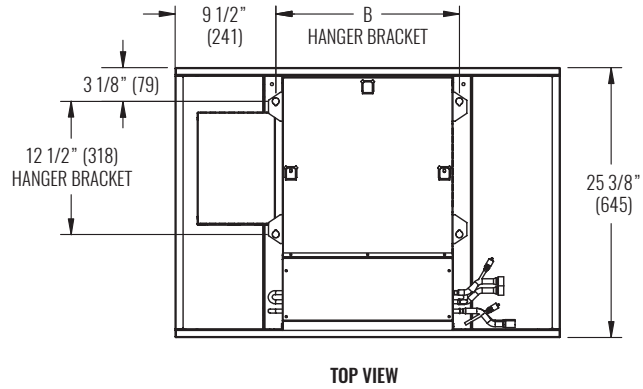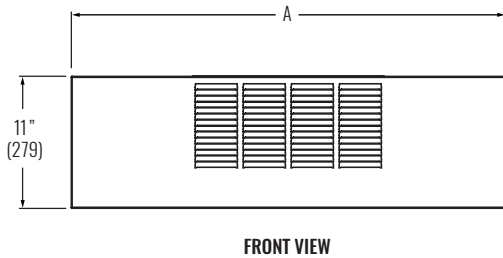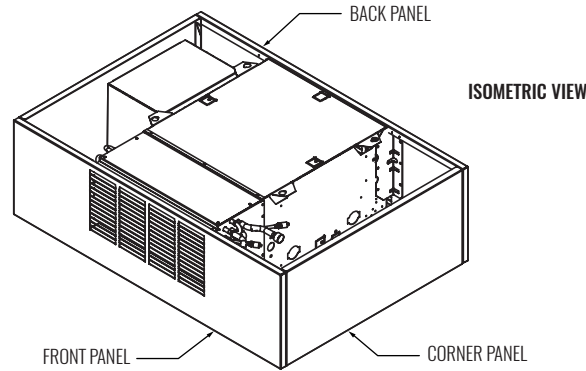


UNIT SIZE	A	B
02	36 1/4" (921)	17 1/4" (438)
03	39 1/2" (1003)	20 1/2" (521)
04	44 1/2" (1130)	25 1/2" (648)
06	51 1/4" (1302)	32 1/4" (819)
08	58 1/4" (1480)	39 1/4" (997)
09	62 1/2" (1588)	43 1/2" (1105)
10	72 1/4" (1835)	53 1/4" (1353)
12	80 1/4" (2038)	61 1/4" (1556)

NOTES: All dimensions are inches (millimeters). All dimensions $\pm 1/4"$ (6mm). Metric values are soft conversions. Left-hand unit shown, right-hand unit opposite. Provide sufficient clearance to access electrical controls and comply with applicable codes and ordinances. Drain piping should be routed through casing opening indicated to provide proper slope. Bottom panel removable for access to filter and fan assembly. Corner panels are removable to access electrical enclosure, coil and valve pack. Internal insulation of field piping may be required. Field piping casing penetrations must be cut in the field to match individual job requirements. All dimensions also apply to units with Electric Heat Only.


DIMENSIONAL DATA | KHFE | BOTTOM RETURN (CONTINUED)

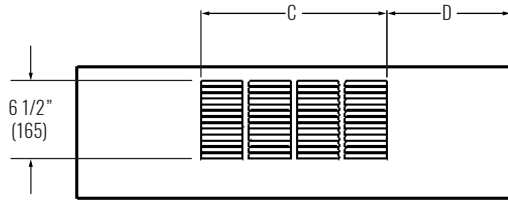


**FRONT PANEL
LOUVERED SUPPLY**

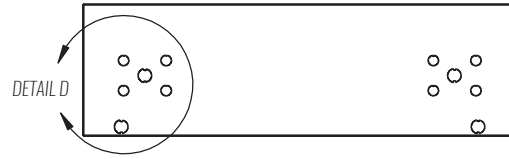


**BACK PANEL
BOTTOM RETURN**

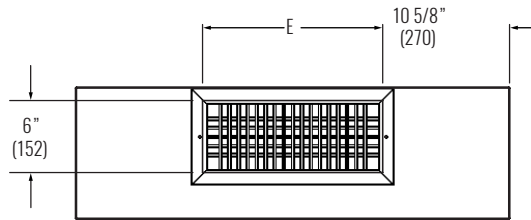


**FRONT PANEL
DOUBLE DEFLECTION SUPPLY GRILLE**

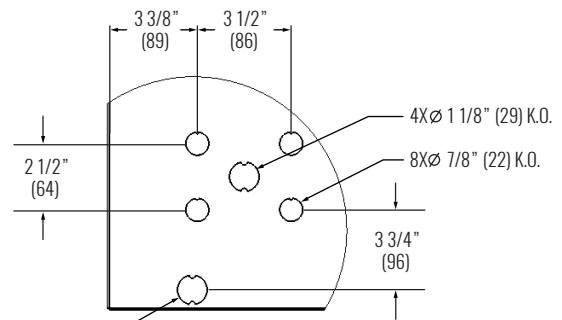

DETAIL D

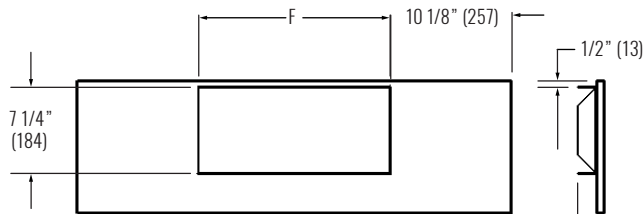

**FRONT PANEL
DUCTED SUPPLY**



**BOTTOM PANEL
BOTTOM RETURN**

UNIT SIZE	C	D	E	F
02	15 1/2" (394)	10 3/8" (264)	15" (381)	16" (406)
03	15 1/2" (394)	12" (305)	18" (457)	19 1/4" (489)
04	23 1/2" (597)	10 1/2" (267)	23" (584)	24 1/4" (616)
06	27 1/2" (699)	11 7/8" (302)	30" (762)	31" (787)
08	35 1/2" (902)	11 3/8" (289)	37" (940)	38" (965)
09	39 1/2" (1003)	11 1/2" (292)	41" (1041)	42 1/4" (1073)
10	51 1/2" (1308)	10 3/8" (264)	23" (584)	52" (1321)
12	59 1/2" (1511)	10 3/8" (264)	27" (686)	60" (1524)


NOTES: All dimensions are inches (millimeters). All dimensions $\pm 1/4"$ (6mm). Metric values are soft conversions. Left-hand unit shown, right-hand unit opposite. Provide sufficient clearance to access electrical controls and comply with applicable codes and ordinances. Drain piping should be routed through casing opening indicated to provide proper slope. Bottom panel removable for access to filter and fan assembly. Corner panels are removable to access electrical enclosure, coil and valve pack. Internal insulation of field piping may be required. Field piping casing penetrations must be cut in the field to match individual job requirements. All dimensions also apply to units with Electric Heat Only.

KHF - SERIES A


Horizontal Fan Coil Units | Low Profile




DIMENSIONAL DATA | KHFE | BOTTOM RETURN (CONTINUED)

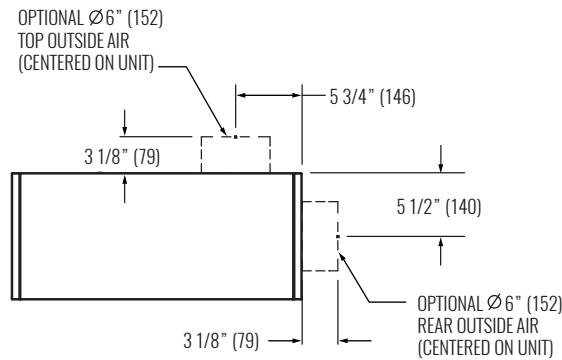

OPTIONAL OUTSIDE AIR FLANGE ONLY DETAIL

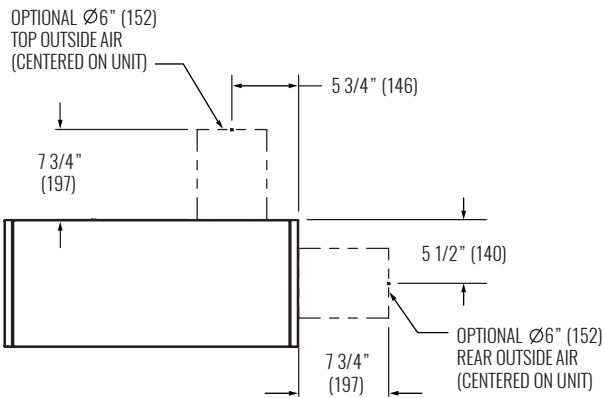

OPTIONAL OUTSIDE AIR WITH MANUAL DAMPER DETAIL

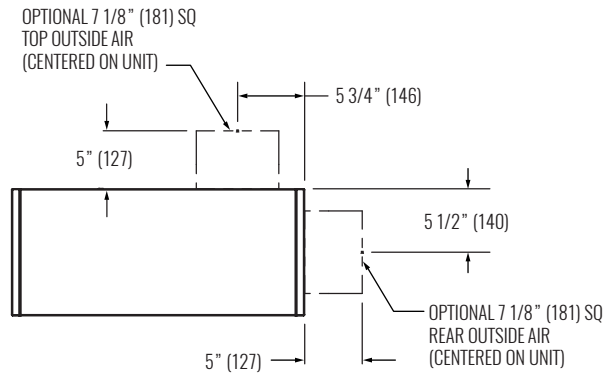

OPTIONAL OUTSIDE AIR WITH MOTORIZED DAMPER DETAIL

NOTES: All dimensions are inches (millimeters). All dimensions $\pm 1/4"$ (6mm). Metric values are soft conversions. Left-hand unit shown, right-hand unit opposite. Provide sufficient clearance to access electrical controls and comply with applicable codes and ordinances. Drain piping should be routed through casing opening indicated to provide proper slope. Bottom panel removable for access to filter and fan assembly. Corner panels are removable to access electrical enclosure, coil and valve pack. Internal insulation of field piping may be required. Field piping casing penetrations must be cut in the field to match individual job requirements. All dimensions also apply to units with Electric Heat Only.

FAN PERFORMANCE CURVES | PSC & EC MOTORS

PSC and EC fan curves on the following pages depict actual performance of each motor tap without any additional fan balance adjustment.

Units should not be run prior to installation of downstream duct work; otherwise, damage to the motor may result.

Krueger Fan Coil Units are equipped with either a permanent split-capacitor (PSC) or electronically commutated (EC) motor. Fan curves shown for PSC motors include three separate taps (high, medium and low), which provide variable horsepower outputs. EC motor fan curves are shown for the 3-speed EC motors with factory programmed high, medium and low speeds.

Fan curves include pressure losses for cabinet, a 3/8" 12 FPI 3-row coil, and a clean 1" throwaway filter. For other coil configurations, use selection software to generate performance curves.

See PSC motor electrical data on pages E2-31 and E2-32. See EC motor electrical data on page E2-34.

For additional high static pressure applications, variable speed EC options, and rating points, use selection software to generate performance curves.

For other models use selection software to generate performance curves.

KHF - SERIES A









Horizontal Fan Coil Units | Low Profile



FAN CURVES | KHFP | PSC MOTORS | SIZE 02 - 12

FAN COIL UNITS | HORIZONTAL, LOW PROFILE

KHF - SERIES A

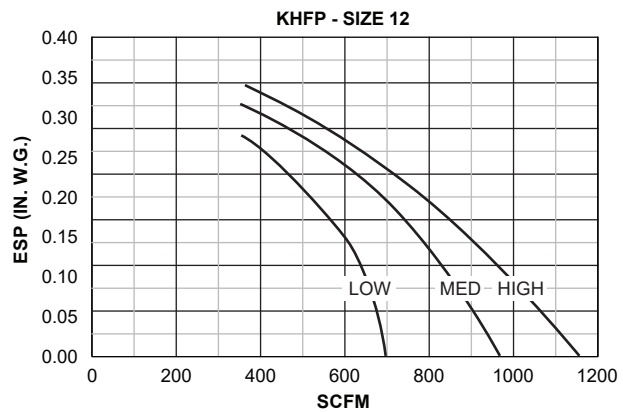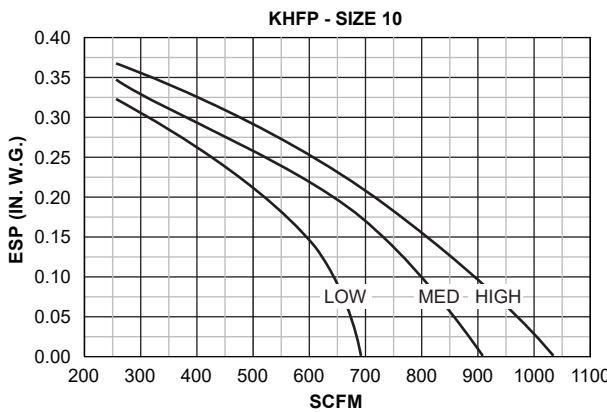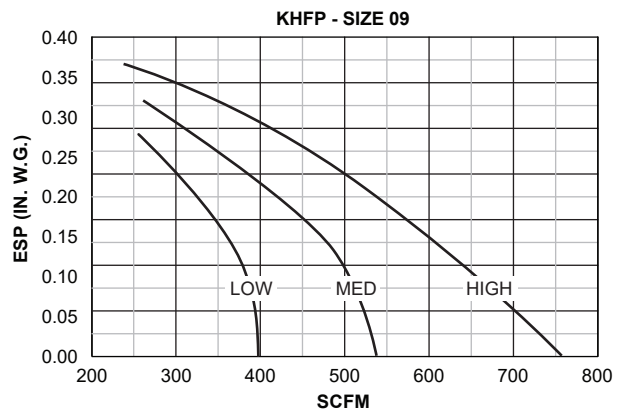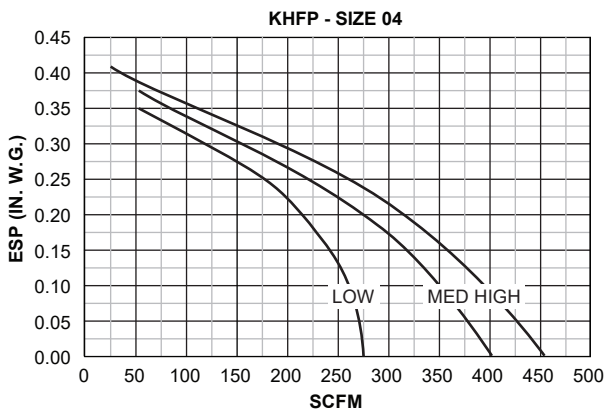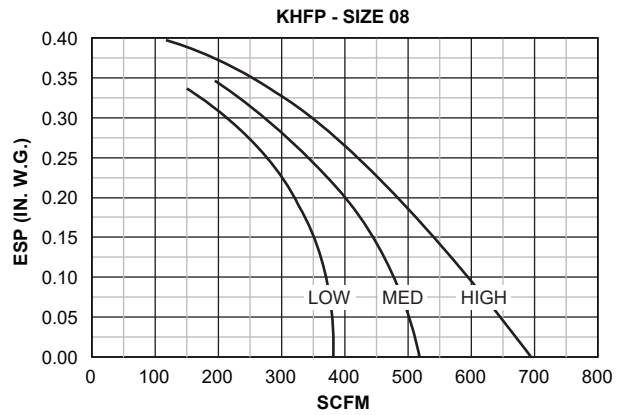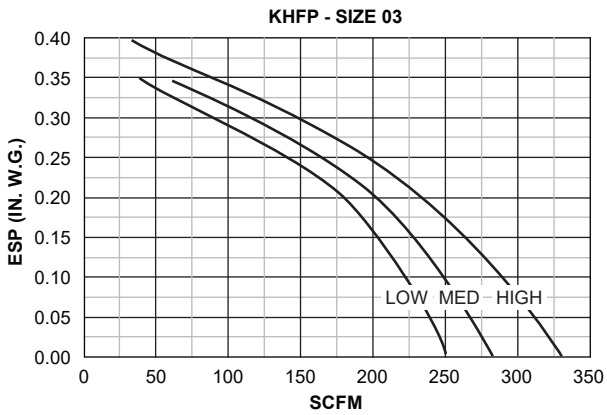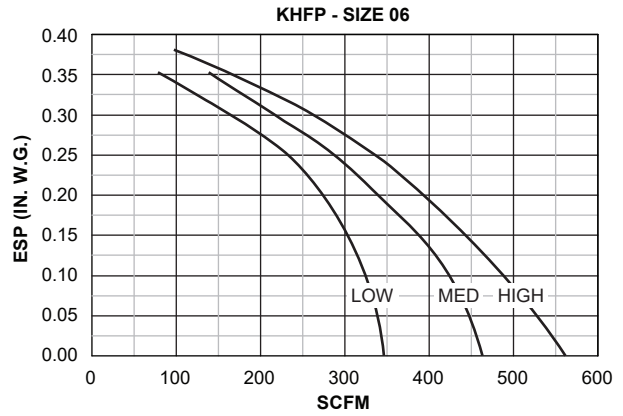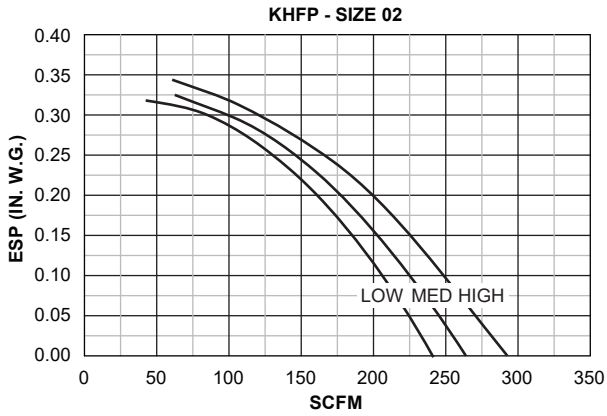

PERFORMANCE DATA | KHFP, KHFE | PSC MOTOR & FAN DATA

UNIT SIZE	MOTOR HP (QTY)	# OF FANS	FAN SPEED	WATTS	AMPS		
					115 VOLTS	208/230 VOLTS	277 VOLTS
02	(1) 1/30 ³	1	HIGH	55	0.5	N/A	N/A
			MEDIUM	40			
			LOW	36			
03	(1) 1/30 ³	1	HIGH	61	0.5	N/A	N/A
			MEDIUM	45			
			LOW	40			
04	(1) 1/20	2	HIGH	75	0.8	N/A	0.5
			MEDIUM	65			
			LOW	58			
06	(1) 1/20	2	HIGHT	80	0.8	N/A	0.5
			MEDIUM	68			
			LOW	56			
08	(1) 1/10	2	HIGH	122	1.1	N/A	0.5
			MEDIUM	83			
			LOW	66			
09	(1) 1/10	2	HIGH	127	1.1	N/A	0.5
			MEDIUM	86			
			LOW	66			
10	(2) 1/20	4	HIGH	148	1.6	N/A	1
			MEDIUM	128			
			LOW	110			
12	(2) 1/20	4	HIGH	160	1.6	N/A	1
			MEDIUM	139			
			LOW	115			

NOTES: Motor electrical data is nameplate data. Watts are based on an KHFP with PSC motor, 3-row coil, 12FPI, 1" throwaway filter, 0.05" ESP at 115V. Motor data is subject to change and should not be used for submittal purposes. Refer to submittals for actual ratings.

KHF - SERIES A

Horizontal Fan Coil Units | Low Profile



PERFORMANCE DATA | KHFH | PSC MOTOR AND FAN DATA









UNIT SIZE	MOTOR HP (QTY)	# OF FANS	FAN SPEED	WATTS	AMPS		
					115 VOLTS	208/230 VOLTS	277 VOLTS
02	(1) 1/30	1	HIGH	55	0.5	N/A	N/A
			MEDIUM	40			
			LOW	36			
03	(1) 1/30	1	HIGH	61	0.5	N/A	N/A
			MEDIUM	45			
			LOW	40			
04	(1) 1/20	2	HIGH	75	0.8	N/A	0.5
			MEDIUM	65			
			LOW	58			
06	(1) 1/10	2	HIGHT	121	1.1	N/A	0.5
			MEDIUM	84			
			LOW	66			
08	(1) 1/6	2	HIGH	224	2.1	N/A	0.9
			MEDIUM	140			
			LOW	66			
09	(1) 1/6	2	HIGH	230	2.1	N/A	0.9
			MEDIUM	139			
			LOW	67			
10	(2) 1/10	4	HIGH	226	2.2	N/A	1
			MEDIUM	154			
			LOW	128			
12	(2) 1/10	4	HIGH	248	2.2	N/A	1
			MEDIUM	171			
			LOW	133			

NOTES: Motor electrical data is nameplate data. Watts are based on an KHFH with PSC motor, 3-row coil, 12FPI, 0.05" ESP at 115V. Motor data is subject to change and should not be used for submittal purposes. Refer to submittals for actual ratings.

FAN COIL UNITS | HORIZONTAL, LOW PROFILE

KHF - SERIES A

FAN CURVES | EC MOTORS | SIZE 02 - 12

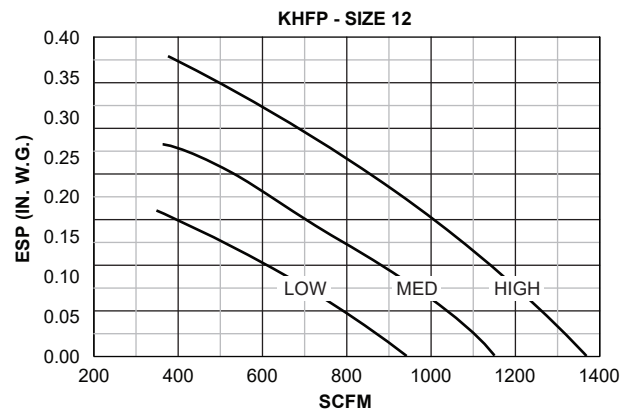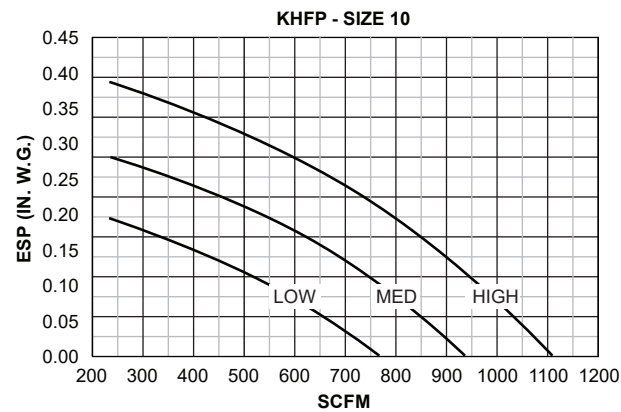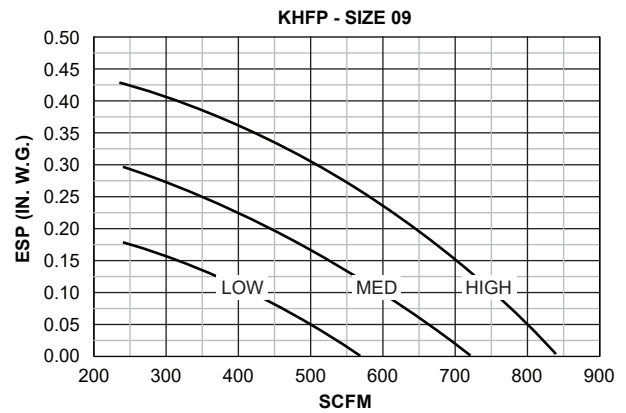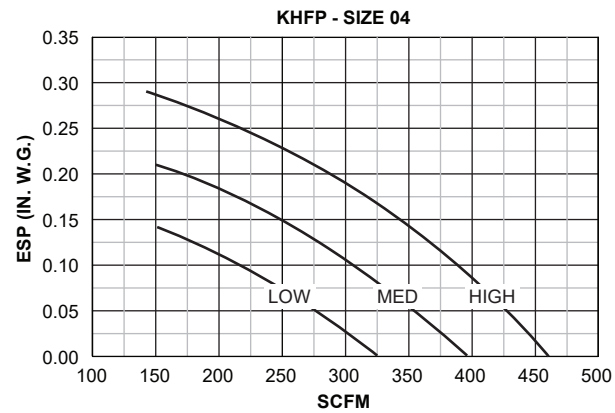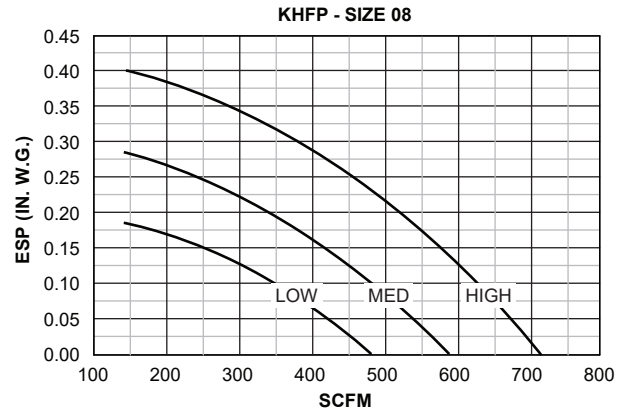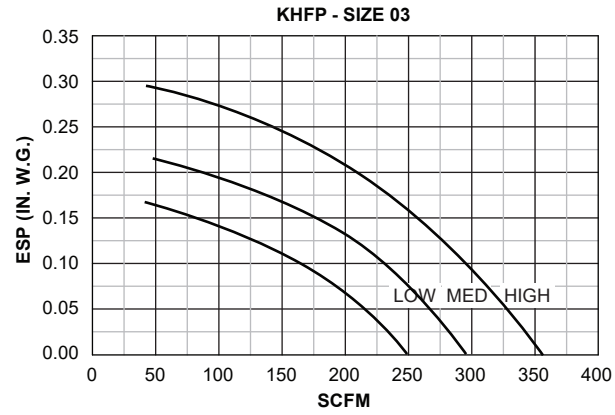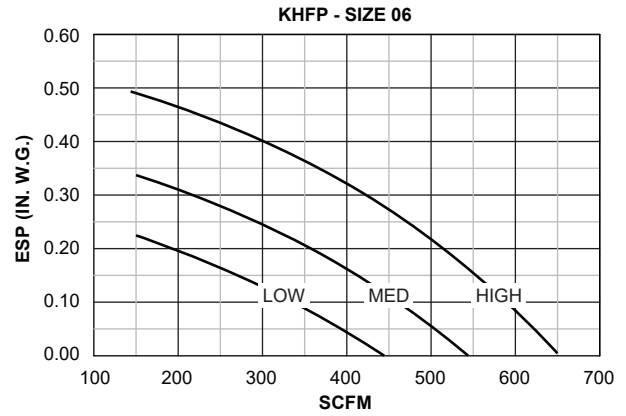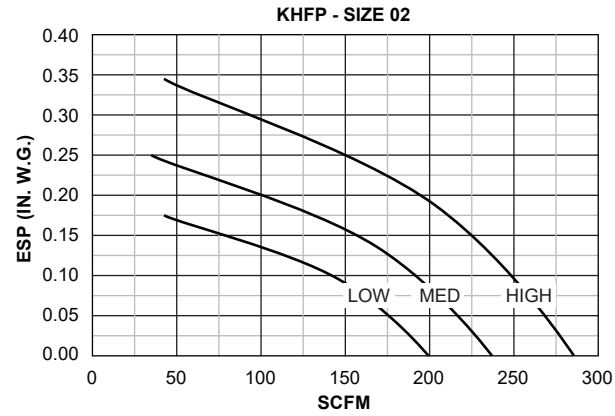

KHF - SERIES A

Horizontal Fan Coil Units | Low Profile



PERFORMANCE DATA | KHFP, KHFE | EC MOTOR AND FAN DATA

UNIT SIZE	MOTOR HP (QTY)	# OF FANS	FAN SPEED	WATTS (STD / HS)	AMPS					
					115 VOLTS		208/230 VOLTS		277 VOLTS	
					3-SPEED (STD / HS)	2-10 VDC	3-SPEED (STD / HS)	2-10 VDC	3-SPEED (STD / HS)	2-10 VDC
02	(1) 1/4	1	HIGH	32 / 45	0.7 / 1.0	0.9	0.5 / 0.6	0.5	0.4 / 0.5	0.5
			MEDIUM	21 / 36						
			LOW	14 / 26						
03	(1) 1/4	1	HIGH	35 / 59	1.0 / 1.5	1.1	0.6 / 0.9	0.7	0.5 / 0.8	0.6
			MEDIUM	23 / 43						
			LOW	16 / 33						
04	(1) 1/4	2	HIGH	50 / 75	1.5 / 1.8	1.2	0.9 / 1.1	0.8	0.8 / 0.9	0.6
			MEDIUM	33 / 56						
			LOW	21 / 41						
06	(1) 1/4	2	HIGHT	104 / 132	2.6 / 3.1	2	1.6 / 1.9	1.2	1.3 / 1.6	1
			MEDIUM	62 / 89						
			LOW	36 / 62						
08	(1) 1/4	2	HIGH	91 / 122	2.3 / 2.9	2	1.4 / 1.7	1.2	1.2 / 1.5	1
			MEDIUM	54 / 90						
			LOW	31 / 62						
09	(1) 1/4	2	HIGH	119 / 182	3.7 / 4.5	2.7	2.3 / 2.7	1.6	1.9 / 2.3	1.4
			MEDIUM	72 / 116						
			LOW	39 / 77						
10	(2) 1/4	4	HIGH	142 / 207	3.9 / 5.1	3.1	2.3 / 3.1	1.9	2.0 / 2.6	1.6
			MEDIUM	91 / 139						
			LOW	54 / 104						
12	(2) 1/4	4	HIGH	143 / 209	3.2 / 4.5	3.5	2.0 / 2.7	2.1	1.6 / 2.3	1.8
			MEDIUM	92 / 152						
			LOW	56 / 105						

NOTES: Motor electrical data is nameplate data. Watts are based on a KHFP with 3-speed EC motor, 3-row coil, 12FPI, 1" throwaway filter, 0.05" ESP at 115V. For 3-phase neutral conductor sizing, multiply AMPS by 1.73. Motor data is subject to change and should not be used for submittal purposes. Refer to selection software submittal for actual ratings.

FAN COIL UNITS | HORIZONTAL, LOW PROFILE

KHF - SERIES A

SOUND DATA | KHFP | AHRI 260 DUCTED DISCHARGE

UNIT SIZE	FAN SPEED	SCFM	SOUND POWER LEVEL						
			OCTAVE BAND/CENTER FREQUENCY (HZ)						
			2/125	3/250	4/500	5/1000	6/2000	7/4000	8/8000
02	HIGH	270	55	54	49	49	45	40	32
	MEDIUM	245	54	51	47	46	41	35	28
	LOW	223	52	49	44	44	39	32	26
03	HIGH	311	55	54	49	49	45	40	32
	MEDIUM	268	54	51	47	46	41	35	28
	LOW	237	52	49	44	44	39	32	26
04	HIGH	425	55	53	50	50	47	41	33
	MEDIUM	377	53	50	47	47	44	37	30
	LOW	272	49	44	42	40	37	31	27
06	HIGHT	529	55	53	50	50	47	41	33
	MEDIUM	448	53	50	47	47	44	37	30
	LOW	335	49	44	42	40	37	31	27
08	HIGH	650	58	58	55	55	52	46	38
	MEDIUM	506	51	50	48	47	43	34	27
	LOW	378	47	44	43	40	34	24	24
09	HIGH	709	58	58	55	55	52	46	38
	MEDIUM	525	51	50	48	47	43	34	27
	LOW	395	47	44	43	40	34	24	24
10	HIGH	967	59	58	56	56	52	47	39
	MEDIUM	863	52	51	49	47	43	35	28
	LOW	672	47	45	43	40	34	25	25
12	HIGH	1083	59	59	56	56	53	47	39
	MEDIUM	912	52	51	49	48	44	35	28
	LOW	681	48	45	44	41	35	25	25

NOTES: Sound data tested in accordance with AHRI 260-2012. Sound levels are expressed in decibels, dB RE: 1 x 10⁻¹² watts. Sound power level data based on Model KHFP with fan CFM at corresponding motor tap with 115/1/60 volt PSC motor, 3-row coil, 1" throwaway filter, 0.05" external static pressure and standard rated internal pressure losses.

KHF - SERIES A

Horizontal Fan Coil Units | Low Profile



SOUND DATA | KHFP | AHRI 260 CASING RADIATED FREE INLET

UNIT SIZE	FAN SPEED	SCFM	SOUND POWER LEVEL						
			OCTAVE BAND/CENTER FREQUENCY (HZ)						
			2/125	3/250	4/500	5/1000	6/2000	7/4000	8/8000
02	HIGH	270	55	57	53	49	42	37	32
	MEDIUM	245	56	54	52	47	40	34	29
	LOW	223	56	53	50	45	38	32	27
03	HIGH	311	55	57	53	49	42	37	32
	MEDIUM	268	56	54	52	47	40	34	29
	LOW	237	56	53	50	45	38	32	27
04	HIGH	425	57	59	57	53	46	41	34
	MEDIUM	377	55	57	55	50	43	38	31
	LOW	272	52	53	51	45	39	33	28
06	HIGHT	529	57	59	57	53	46	41	34
	MEDIUM	448	55	57	55	50	43	38	31
	LOW	335	52	53	51	45	39	33	28
08	HIGH	650	61	62	58	54	47	43	36
	MEDIUM	506	55	56	53	47	40	34	27
	LOW	378	51	51	48	41	32	26	24
09	HIGH	709	61	62	58	54	47	43	36
	MEDIUM	525	55	56	53	47	40	34	27
	LOW	395	51	51	48	41	32	26	24
10	HIGH	967	58	57	57	54	46	40	32
	MEDIUM	863	57	54	55	51	44	37	29
	LOW	672	54	50	51	46	38	29	26
12	HIGH	1083	58	57	57	54	46	40	32
	MEDIUM	912	57	54	55	51	44	37	29
	LOW	681	54	50	51	46	38	29	26

NOTES: Sound data tested in accordance with AHRI 260-2012. Sound levels are expressed in decibels, dB RE: 1×10^{-12} watts. Sound power level data based on Model KHFP with fan CFM at corresponding motor tap with 115/1/60 volt PSC motor, 3-row coil, 1" throwaway filter, 0.05" external static pressure and standard rated internal pressure losses.

FAN COIL UNITS | HORIZONTAL, LOW PROFILE

KHF - SERIES A

SOUND DATA | KHFE | AHRI 350

UNIT SIZE	FAN SPEED	SCFM	SOUND POWER LEVEL						
			OCTAVE BAND/CENTER FREQUENCY (HZ)						
			2/125	3/250	4/500	5/1000	6/2000	7/4000	8/8000
02	HIGH	252	53	58	53	51	45	39	31
	MEDIUM	232	52	56	52	49	43	36	29
	LOW	214	51	54	51	47	41	33	26
03	HIGH	287	53	58	53	51	45	39	31
	MEDIUM	254	52	56	52	49	43	36	29
	LOW	224	51	54	51	47	41	33	26
04	HIGH	399	56	60	57	54	49	43	34
	MEDIUM	358	56	57	55	52	46	38	29
	LOW	269	52	52	50	45	38	28	24
06	HIGH	485	56	60	57	54	49	43	34
	MEDIUM	426	56	57	55	52	46	38	29
	LOW	320	52	52	50	45	38	28	24
08	HIGH	602	61	62	59	57	52	48	40
	MEDIUM	491	55	56	54	50	45	39	31
	LOW	377	49	50	47	43	36	28	25
09	HIGH	682	61	62	59	57	52	48	40
	MEDIUM	558	55	56	54	50	45	39	31
	LOW	416	49	50	47	43	36	28	25
10	HIGH	893	57	60	59	57	50	43	35
	MEDIUM	812	58	58	57	54	48	40	32
	LOW	658	55	53	53	49	41	32	26
12	HIGH	992	57	60	59	57	50	43	35
	MEDIUM	870	58	58	57	54	48	40	32
	LOW	672	55	53	53	49	41	32	26

NOTES: Sound data tested in accordance with AHRI 350-2015. Sound levels are expressed in decibels, dB RE: 1 x 10⁻¹² watts. Total sound power level data based on Model KHFE with fan CFM at corresponding motor tap with 115/1/60 volt PSC motor, 3-row coil, 1" throwaway filter, 0.0" external static pressure and standard rated internal pressure losses.

KHF - SERIES A

Horizontal Fan Coil Units | Low Profile



SUGGESTED SPECIFICATION & CONFIGURATION

GENERAL

Furnish and install Krueger Model KHF Horizontal Direct Drive Fan Coil Units where indicated on the plans and in the specifications. Units shall be completely factory assembled, tested and shipped as one piece. Units shall be capable of meeting or exceeding the scheduled capacities for cooling, heating and air delivery. Unit dimensions for each model and size shall be considered maximums. Units shall be cETLus listed in compliance with UL/ANSI Standard 1995, and be certified as complying with the latest edition of AHRI Standard 440.

CONSTRUCTION

Unit chassis shall be fabricated of galvanized steel panels. Exterior panels shall be insulated with 3/8" thick elastomeric closed cell foam insulation. Insulation shall conform to UL 181 for erosion and NFPA 90A for fire and smoke, and comply with a 25/50 Flame Spread and Smoke Developed Index per ASTM E-84 or UL 723. Additionally, insulation shall comply with Antimicrobial Performance Rating of 0, no observed growth, per ASTM G-21. Polyethylene insulation is not acceptable.

Ducted units shall have a minimum 1-1/2" duct collar on the discharge. Plenum and exposed units shall have a minimum 3/4" duct collar on the return.

Exposed units shall have exterior panels fabricated of galvanized steel. The fan and filter bottom access panel shall be attached with quarter turn quick open fasteners to allow for easy removal and access for service.

Unit mounting shall be by hanger brackets provided at four locations.

PAINTED FINISH

Painted cabinet exterior panels shall be finished with a heat cured anodic acrylic powder paint of the standard factory color.

SOUND

Ducted units shall have published sound power level data tested in accordance with AHRI Standard 260-2012. Exposed units shall have published sound power level data tested in accordance with AHRI Standard 350-2015 (non-ducted equipment).

FAN ASSEMBLY

Unit fan shall be a dynamically balanced, forwardly curved, DWDI centrifugal type constructed of 18 gauge zinc coated galvanized steel for corrosion resistance. Motors shall be high efficiency, permanently lubricated sleeve bearing, permanent split-capacitor type with UL and CSA listed automatic reset thermal overload protection and three separate horsepower taps. Single speed motors are not acceptable.

The fan assembly shall be easily removable for servicing the motor and blower at, or away from the unit. The entire fan assembly shall be able to come out of the unit by removing two screws and unplugging the motor. Plenum unit fan assemblies shall be easily serviced through an access panel in casing.

Devices used to energize and de-energize (switch) fan speeds must be silent. Magnetic, mercury, and/or quiet relays and/or contactors are not acceptable.

(Optional) Provide Electronically Commutated (EC) Motor capable of operation with low voltage 3-speed thermostat. Motor shall come factory programmed and configured for 3-speed operation.

(Optional) Motor shall be capable of accepting a 2-10 VDC output from BAS.

(Optional) Provide an electronic (SCR) fan speed controller as an aid in balancing the fan capacity. The speed controller shall have a turn down stop to prevent the possibility of harming the motor bearings, and incorporate electrical noise suppression to minimize noise on the incoming power lines.

COILS

Cooling and heating coils shall optimize rows and fins per inch to meet the specified capacity. Coils shall have seamless copper tubes and shall be mechanically expanded to provide an efficient, permanent bond between the tube and fin. Fins shall have high efficiency aluminum surface optimized for heat transfer, air pressure drop and moisture carryover.

Each coil shall be pressured to 450 PSIG and rated for a maximum of 450 PSIG working pressure.

Steam coils shall be standard steam type suitable for air temperatures above 35°F and 15 PSIG maximum working pressure.

(Optional) Coil casing shall be fabricated from Stainless Steel. Coils shall be provided with a manual air vent fitting to allow for coil venting.

(Optional) Provide automatic air vents in lieu of manual air vents. Heating coils shall be furnished in the reheat or preheat position on units with chilled water coils, or in the reheat position for DX coils.

DRAIN PANS

Primary condensate drain pans shall be single wall, galvanized steel for corrosion resistance, and extend under the entire cooling coil. Drain pans shall be of one-piece construction and be double sloped for condensate removal.

SUGGESTED SPECIFICATION & CONFIGURATION (CONTINUED)

Drain pans shall be fully removable without the use of any tools.

The drain pan shall be externally insulated with a fire retardant, closed cell foam insulation. The insulation shall carry no more than a 25/50 Flame Spread and Smoke Developed Rating per ASTM E-84 and UL 723 and an Antimicrobial Performance Rating of 0, no observed growth, per ASTM G-21.

(Optional) Provide a single wall primary drain pan constructed entirely of stainless steel for superior corrosion resistance. Stainless steel drain pans shall be externally insulated.

(Optional) Provide a secondary drain connection on the primary drain pan for condensate overflow.

FILTERS

Plenum and exposed units shall be furnished with a minimum 1" nominal glass fiber throwaway filter. Filters shall be tight fitting to prevent air bypass. Plenum unit filters shall be easily removable from the bottom of the unit without the need for tools.

(Optional) Provide unit with 1" pleated filter (MERV 8).

(Optional) Provide unit with 1" pleated filter (MERV 13).

ELECTRICAL

Units shall be furnished with single point power connection. Provide an electrical junction box for motor and other electrical terminations.

ELECTRIC HEAT

Furnish an electric resistance heating assembly as an integral part of the fan coil unit, with the heating capacity, voltage and kilowatts scheduled. The heater assembly shall be designed and rated for installation on the fan coil unit without the use of duct extensions or transitions, and be located in the unit as to not expose the fan assembly to excessive leaving air temperatures that could affect motor performance.

The heater and unit assembly shall be listed for zero clearance and meet all NEC requirements, and be cETLus listed with the unit as an assembly in compliance with UL/ANSI Standard 1995.

Heating elements shall be open coil type nichrome wire mounted in ceramic insulators and located in an insulated galvanized steel housing. Elements shall terminate in a machine staked stainless steel terminal secured with stainless steel hardware for corrosion resistance. The element support brackets shall be spaced no greater than 3-1/2" on center. Internal wiring shall be rated for 105°C minimum. Heaters shall include overtemperature protection consisting of an automatic reset primary

thermal limit and back up secondary thermal limit. Heaters shall be single stage.

(Optional) Provide a manual reset secondary thermal limit.

Units with electric heat shall have an incoming line power distribution block shall be designated to accept single point power wiring capable of carrying 125% of the calculated load current.

(Optional) Devices used to energize and de-energize (switch) electric heat must be silent. Magnetic, mercury, and/or quiet relays and/or contactors are not acceptable.

PIPING PACKAGES

Provide a standard factory assembled valve piping package to consist of a 2-way or 3-way, on/off, motorized electric control valve and two ball isolation valves. Control valves are piped normally closed to cold water coils and normally open to hot water coils. Maximum entering water temperature on the control valve is 200 °F.

Provide high pressure close-off actuators for 2-way or 3-way on/off control valves. Maximum close-off pressure is 125 PSIG.

(Optional) Valve package mounted from the factory with structural supports. Field mounted valves are not acceptable.

(Optional) Provide 3-wire floating point modulating control valve (fail-in-place) in lieu of standard 2-position control valve with factory assembled valve piping package.

(Optional) Provide 0-10V proportional control valve (fail-in-place) in lieu of standard 2-position control valve with factory assembled valve piping package.

(Optional) Provide a fixed flow control device with a removable cartridge or each piping package.

(Optional) Normally open in lieu of Normally Closed on/off valves.

(Optional) Spring return (N.O. or N.C.) modulating control valve.

(Optional) Spring return (N.O. or N.C.) proportional control valve.

(Optional) Provide pressure-temperature ports for each piping package.

Piping package shall be completely factory assembled, including interconnecting pipe, and shipped separate from the unit for field installation on the coil, so as to minimize the risk of freight damage.

SUGGESTED SPECIFICATION & CONFIGURATION (CONTINUED)

1. SERIES: (XXXX)

KHFE - Horizontal Fan Coil, Exposed Cabinet
 KHFH - Horizontal Fan Coil, Concealed Ceiling
 KHFP - Horizontal Fan Coil, Concealed with Plenum

2. SIZE: (XX)

02, 03, 04, 06, 08, 09, 10, 12

3. MOTOR: (X)

A - 115/1/60 PSC
 D - 277/1/60 PSC
 F - 115/1/60 ECM
 G - 208/1/60 ECM
 H - 230/1/60 ECM
 J - 277/1/60 ECM
 K - 220-240/1/50 ECM
 L - 115/1/60 ECM 3 SPD
 M - 208/1/60 ECM 3 SPD
 N - 230/1/60 ECM 3 SPD
 P - 277/1/60 ECM 3 SPD
 Q - 220-240/1/50 ECM 3 SPD

4. MOTOR CONTROL: (X)

0 - None
 A - 3-Speed Adjustable (Select)
 B - 2-10 VDC (Sync)
 C - 3-Speed Fixed

5. UNIT CAPACITY: (X)

0 - Standard Capacity
 H - High Capacity

6. COIL 1: (X)

0 - None
 A - 2-Row C/W
 B - 3-Row C/W
 C - 4-Row C/W
 D - 5-Row C/W
 E - 6-Row C/W
 F - 1-Row H/W
 G - 2-Row H/W
 H - 2-Row DX
 J - 3-Row DX
 K - 4-Row DX
 L - 5-Row DX
 T - 1-Row Steam
 V - 2-Row Steam
 P - 2-Row with Changeover
 R - 3-Row with Changeover
 S - 4-Row with Changeover
 M - 5-Row with Changeover
 N - 6-Row with Changeover

7. COIL 1 DIAMETER: (XX)

00 - None
 38 - 3/8" Tube Diameter
 12 - 1/2" Tube Diameter

8. COIL 1 FPI: (XX)

00 - None
 10 - 10 FPI
 12 - 12 FPI
 14 - 14 FPI

9. COIL 1 TUBE WALL: (X)

0 - None
 3 - 0.012" Tube Wall Thickness
 2 - 0.025" Tube Wall Thickness

10. COIL 1 HAND: (X)

0 - None
 L - Left-Hand
 R - Right-Hand

11. COIL 1 AIR VENT: (X)

0 - None
 1 - Manual Air Vent
 2 - Auto Air Vent

12. COIL 1 CASING: (X)

0 - None
 1 - Galvanized Coil Casing
 2 - Stainless Steel Coil Casing

13. COIL 1 REFRIGERANT TYPE (KHFE, KHFH Only): (X)

0 - None
 4 - R-410

14. COIL 1 DISTRIBUTOR: (XXX)

(See Krueger's selection software.)

15. COIL 1 PIPING SIZE: (X)

H - 1/2"
 T - 3/4"

16. COIL 1 PIPING VALVE: (X)

0 - None
 A - 2-Way Control Valve
 B - 3-Way Control Valve
 C - 3-Way with Balance Bypass Valve

17. COIL 1 PIPING PACKAGE: (XX)

00 - 1/2" Valve Package (Provided by Others)
 01 - 3/4" Valve Package (Provided by Others)
 24 - MBV with MS
 25 - MBV with MS, Fixed Flow Control
 36 - MBV with MS
 37 - MBV with MS, Fixed Flow Control
 50 - MBV with MS

SUGGESTED SPECIFICATION & CONFIGURATION (CONTINUED)

18. COIL 1 FIXED GPM: (X)

- 0 - Not Available
- A - 0.5 GPM
- B - 1.0 GPM
- C - 1.5 GPM
- D - 2.0 GPM
- E - 2.5 GPM
- F - 3.0 GPM
- G - 3.5 GPM
- H - 4.0 GPM
- J - 5.0 GPM
- K - 6.0 GPM
- L - 7.0 GPM
- M - 8.0 GPM
- N - 9.0 GPM
- P - 10.0 GPM
- R - 11.0 GPM
- S - 12.0 GPM

19. COIL 1 UNIONS: (X)

- 0 - None
- U - Union

20. COIL 1 P/T PORTS: (X)

- 0 - None
- P - P/T Port

21. COIL 1 AQUASTAT BLEED LINE: (X)

- 0 - None
- A - Aquastat Bleed Line

22. COIL 1 COIL 1 Y-STRAINER: (X)

- 0 - None
- Y - Y-Strainer with Blowdown

23. COIL 1 ACTUATOR TYPE: (X)

- 0 - None
- 1 - 2-Position Close-Off, 24V
- 3 - Modulating Valves, Floating Point, 24V
- 4 - Proportional Valves, 24V

24. COIL 1 ACTUATOR POSITION: (XX)

- 00 - None
- 2C - Normally Closed - 2-Position Close-Off
- 2O - Normally Open - 2-Position Close-Off
- MC - Normally Closed - Modulating
- MO - Normally Open - Modulating
- MP - Fail-In-Place - Modulating
- PC - Normally Closed - Proportional
- PO - Normally Open - Proportional
- PP - Fail-In-Place - Proportional

25. COIL 1 PIPING FACTORY MOUNT: (X)

- 0 - None, Shipped Loose
- M - Piping Package Mounted at Factory

26. ELECTRIC HEAT VOLTAGE: (X)

- A - 115 Volt, 1-Phase, 1-Stage
- D - 208 Volt, 1-Phase, 1-Stage
- G - 220 Volt, 1-Phase, 1-Stage
- H - 230 Volt, 1-Phase, 1-Stage
- J - 240 Volt, 1-Phase, 1-Stage
- K - 277 Volt, 1-Phase, 1-Stage

27. kW: (XX)

- 00 - 00 kW
- 01 - 01 kW
- 15 - 1.5 kW
- 02 - 02 kW
- 03 - 03 kW
- 04 - 04 kW
- 05 - 05 kW
- 06 - 06 kW
- 07 - 07 kW
- 08 - 08 kW
- 09 - 09 kW
- 10 - 10 kW
- 12 - 12 kW

28. SILENT RELAY: (X)

- 0 - None
- S - Silent Relay

29. ELECTRIC HEAT HAND: (X)

- 0 - None
- L - Left-Hand
- R - Right-Hand

30. COIL 2 SELECTIONS

(See Coil 1 options. Differences may apply.)

31. FILTER (KHFE/KHFP Only): (X)

- 0 - 1" Throwaway Filter
- P - 1" Pleated Filter MERV 8
- T - 1" Pleated Filter MERV 13

32. SPARE FILTER (KHFE, KHFP Only): (X)

- 0 - None
- 1 - QTY 1 - 1" Spare Throwaway Filter
- 2 - QTY 2 - 1" Spare Throwaway Filter
- 3 - QTY 3 - 1" Spare Throwaway Filter
- 4 - QTY 1 - 1" Spare Pleated Filter MERV 8
- 5 - QTY 2 - 1" Spare Pleated Filter MERV 8
- 6 - QTY 3 - 1" Spare Pleated Filter MERV 8
- 7 - QTY 1 - 1" Spare Pleated Filter MERV 13
- 8 - QTY 2 - 1" Spare Pleated Filter MERV 13
- 9 - QTY 3 - 1" Spare Pleated Filter MERV 13

SUGGESTED SPECIFICATION & CONFIGURATION (CONTINUED)

33. ACCESS PANEL (KHFH, KHFP Only): (X)

- 0 - None
- S - Solid Ceiling Access Panel - British White
- C - Ceiling Access RAP - British White
- T - Ceiling Access RAP with Telescoping Duct - British White

34. ACCESS PANEL SIZE (KHFH, KHFP Only): (XX)

- 00 - None
- 02 - 02
- 03 - 03
- 04 - 04
- 06 - 06
- 08 - 08
- 09 - 09
- 10 - 10
- 12 - 12

35. INSULATION: (X)

- C - Elastomeric Closed Cell Foam Insulation

36. UNIT DRAIN PAN: (X)

- 0 - None
- G - Galvanized Drain Pan
- S - Stainless Steel Unit Drain Pan

37. SECONDARY DRAIN CONNECT: (X)

- 0 - None
- C - Secondary Drain Connection

38. AUXILIARY DRIP PAN: (X)

- 0 - None
- G - Galvanized Auxiliary Drip Pan
- S - Stainless Steel Auxiliary Drip Pan

39. BASIC CONTROL PACKAGE: (X)

- 0 - Line Voltage with Electric Heat (EH)
- 1 - Line Voltage
- 2 - 24V, Unit S/S Relay, Fan Op. Relay, Trans.
- 3 - 24V, Unit S/S Relay, Fan Op. Relay, Trans. with EH

40. FAN SPEED CONTROLLER: (X)

- 0 - None
- F - SCR Fan Speed Controller

41. DISCONNECT SWITCH: (X)

- 0 - None
- L - Door Interlocking non-Fused Disconnect
- T - Toggle Disconnect Switch

42. MAIN FUSING: (X)

- 0 - None
- M - Main Fusing

43. FLOAT SWITCH: (X)

- 0 - None
- D - Drain Pan Float Switch

44. SPEED SWITCH: (X)

- 0 - None
- U - Unit Mount 3-Speed Switch with Off Position
- R - Remote Mount 3-Speed Switch with Off Position

45. RETURN AIR (KHFP Only): (X)

- 1 - Return Rear No Duct Collar
- 2 - Return Rear Duct Collar
- 3 - Return Bottom No Duct Collar

46. RETURN AIR (KHFE Only): (X)

- 0 - Return Bottom Stamped Louver Grille
- 1 - Return Rear Stamped Louver Grille
- 2 - Return Rear Duct Collar

47. SUPPLY AIR (KHFE Only): (X)

- 0 - Supply Stamped Louver Grille
- 1 - Supply Duct Collar
- 2 - Supply Double Deflection Aluminum Grille

48. PAINT (KHFE Only): (X)

- 0 - Pearl White Satin
- 1 - British White

49. THERMOSTAT: (XXXX)

(See Krueger's selection software.)

50. NETWORK CAPABILITY: (X)

- 0 - None
- B - BACnet Enabled
- S - Standalone

51. THERMOSTAT LOCATION: (X)

- 0 - None
- R - Remote Mounted Thermostat
- U - Unit Mounted Thermostat

52. AQUASTAT: (X)

- 0 - None
- A - Aquastat

53. VIBRATION ISOLATION: (X)

- 0 - None
- Y - Vibration Isolation

54. DIRTY FILTER SENSOR (KHFE, KHFP Only): (X)

- 0 - None
- D - Dirty Filter Sensor

55. ACCESS LATCHES (KHFE Only): (X)

- S - Standard
- T - Tamper Proof

56. CONDENSATE PUMP: (X)

- 0 - None
- C - Condensate Pump

Continued on next page.

SUGGESTED SPECIFICATION & CONFIGURATION (CONTINUED)

- 57. DISCHARGE AIR SENSOR: (X)**
 - 0 - None
 - D - Discharge Air Sensor

- 58. CURRENT SENSOR: (X)**
 - 0 - None
 - C - Current Sensor

- 59. ENCLOSURE MOUNT: (X)**
 - U - Unit Mount
 - R - Remote Mount

- 60. SEISMIC UNIT (KHFP Only): (X)**
 - 0 - None
 - S - Seismic Unit

- 61. OUTSIDE AIR (KHFP, KHFE Only): (X)**
 - 0 - None
 - 1 - Manual Outside Air Damper
 - 2 - Motorized Outside Air Damper
 - 3 - Flange Only

- 62. OUTSIDE AIR LOCATION (KHFP, KHFE Only): (X)**
 - 0 - None
 - T - Top
 - R - Rear

- 63. COIL FREEZE SENSOR (KHFP, KHFE Only): (X)**
 - 0 - None
 - C - Coil Freeze Sensor