

**TERMINAL UNITS | FAN POWERED** 


## **■** KRUEGER


Fan Powered Terminal Unit | Ultra Quiet, Series Flow


## FAN CURVES | ECM













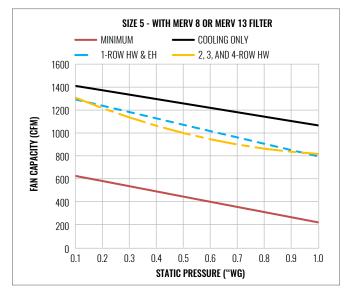



B2-24 © Copyright Krueger 2023




## FAN CURVES | ECM (CONTINUED)









NOTES: Fan curves above indicate the airflows of a KFSS product with or without hot water coils, electric reheat, and/or MERV 8 or MERV 13 filters. Minimum airflows might be lower than shown when reheat coils are selected. See Krueger's selection software for complete fan curves. Manual or remote adjustable speed controller is standard with each unit. See Product Description section on page B2-7 for definitions of manual and remote adjustable speed controllers. Units must be selected to operate within the airflow and external static pressure ranges shown.

© Copyright Krueger 2023