

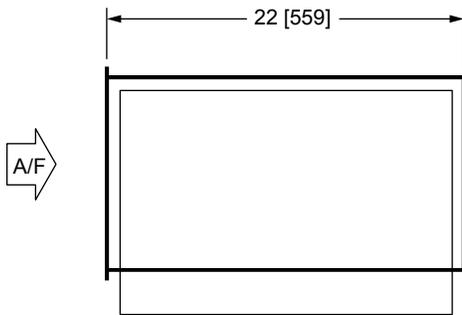


BT
Blow Thru Single Blower
Electric Heat Section

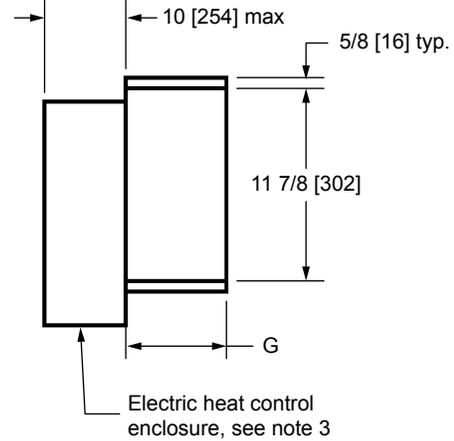

Side Views

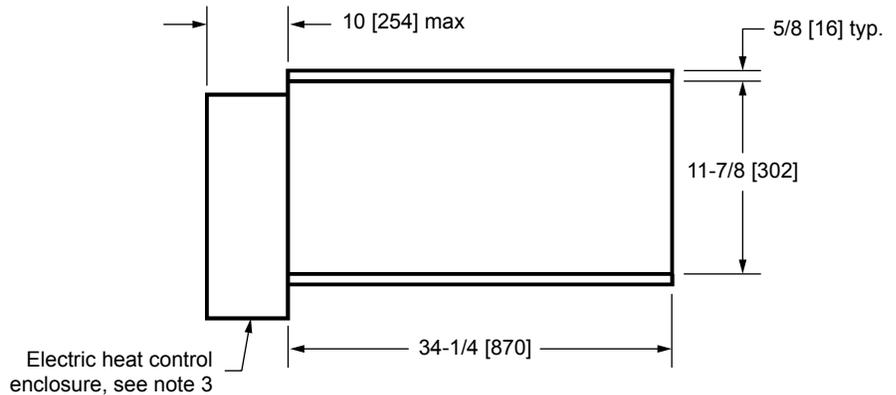

Front Views

BT
Blow Thru Duel Blower
Electric Heat Section

NOTES:

1. All dimensions are in Inches [millimeters]. All dimensions are $\pm 1/4"$ [6mm]. Metric values are soft conversion.
2. Motor/drive location may be specified Left or Right Hand. Standard control enclosure location matches motor/drive position.
3. Provide sufficient clearance to permit access to controls and comply with applicable codes and ordinances.
4. Available for horizontal discharge only.
5. For units configured with on uninsulated blow-thru heat section: to prevent sweating, ensure that insulation is field-installed prior to cooling mode operation.

UNIT SIZE	WEIGHT lbs [kg.]		G
	SINGLE BLOWER	DUEL BLOWER	
08	45 [20]	-	8 3/4 [222]
12	45 [20]	-	8 3/4 [222]
16	45 [20]	-	10 3/4 [273]
20	45 [20]	-	10 3/4 [273]
30	45 [20]	100 [45]	10 3/4 [273]
40	45 [20]	140 [64]	10 3/4 [273]