



JOB NAME
ENGINEER
CONTRACTOR
TAG



CURVED 1500/1600/1800/1850

ALUMINUM LINEAR BAR GRILLE - CEILING, SIDEWALL, FLOOR


SUBMITTAL SHEET

CURVED STYLE:


☐ CURVED

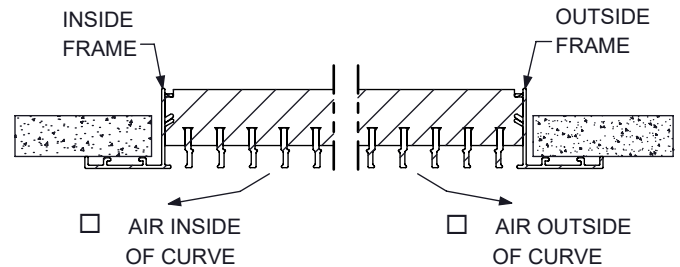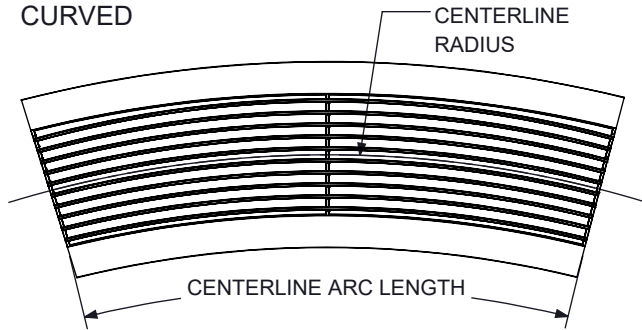

☐ CONCAVE

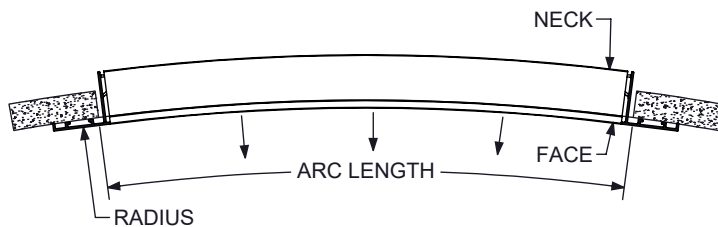

☐ CONVEX

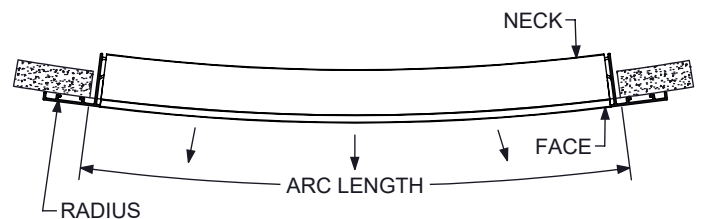

DIMENSION ARE GIVEN AS INCHES [MM]

BASE MODEL :

- ☐ 1500
- ☐ 1600
- ☐ 1800
- ☐ 1850

BLADE SPACING :

1500/1800

- ☐ N - NORMAL 1/2"
- ☐ P - PENCIL PROOF 7/16"

1600/1850

- ☐ N - NORMAL 1/4"
- ☐ E - EVERY OTHER BAR 1/2"

DEFLECTION :

- ☐ 0 DEGREES
- ☐ 15 DEGREES
- ☐ 30 DEGREES

FRAME :

1500/1600

- ☐ A - 1 1/4" FRAME
- ☐ B - 1" FRAME
- ☐ C - 3/4" FRAME
- ☐ D - 1/2" FRAME
- ☐ R - 1/4" FRAME

1800/1850

- ☐ H - 1 1/4" FRAME
- ☐ M - 1" FRAME
- ☐ N - 3/16" FRAME

MOUNTING :

- ☐ 00 - NO MOUNTING
- ☐ 01 - SPRING CLIPS
- ☐ 02 - CONCEALED FASTENING
- ☐ 03 - SCREW HOLES

END BORDER :

- ☐ BUTT CUT / END CAP
- ☐ BUTT CUT
- ☐ END CAP / BUTT CUT
- ☐ END CAPS

FINISH :

- ☐ 44 - BRITISH WHITE
- ☐ 01 - MILL
- ☐ 35 - BLACK
- ☐ 07 - ENAMEL PAINT MATCH
- ☐ 10 - ALUMICAN
- ☐ 49 - OFF WHITE
- ☐ 81 - CLEAR ANODIZE
- ☐ 84 - LIGHT BRONZE ANODIZE
- ☐ 85 - MEDIUM BRONZE ANODIZE
- ☐ 86 - DARK BRONZE ANODIZE

NOTES :

- WIDTHS RUN FROM 2" TO 24" FOR 1500/1600 AND 2" TO 12" FOR 1800/1850
- MINIMUM ARC LENGTH IS 12" FOR ALL MODELS
- CURVED LENGTHS GREATER THAN 72" [1829] ARE FURNISHED IN MULTIPLE SECTIONS
- USE CURVING REQUEST EXCEL SHEET LINK FOR CALCULATOR AND ORDERING
- CONSTRUCTION IS EXTRUDED ALUMINUM WITH STEEL FASTENERS
- DEFLECTION ANGLES ARE LIMITED BY SELECTED CONFIGURATION. CHECK WEBSITE SUBMITTALS

ARC LENGTH : _____

RADIUS : _____

Revision Date: 5/15/2024

Form: GS0312

Replaces: NEW SUBMITTAL

Product Information is Subject to Change Without Notice