




CRFF-L / CRFF-L-ARSM

With Filter, PSC, Backward Inclined Fan, and Room Side Access*

SUBMITTAL SHEET

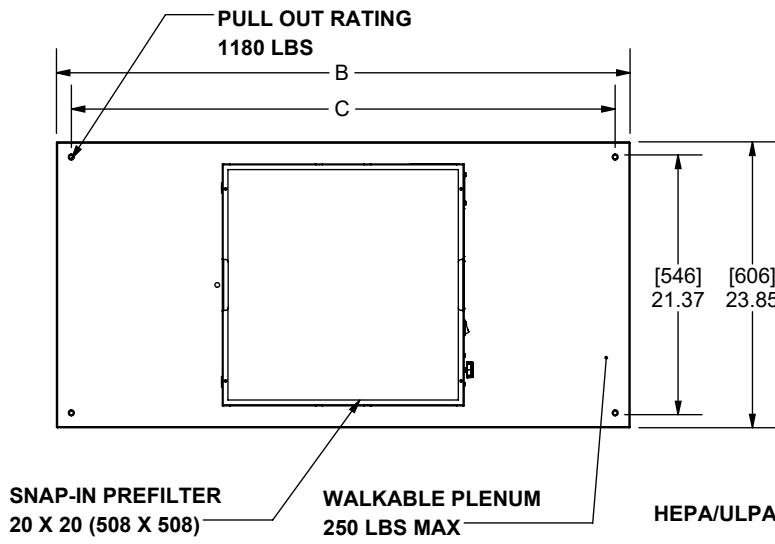

PANEL SIZE	A	B	C	CRFF-L WEIGHT LB (kg)	CRFF-L-ARSM WEIGHT* LB (kg)
24 X 24	23.63 (600)	23.85 (606)	21.37 (543)	35 (16)	42 (19)
24 X 48	47.63 (1210)	47.85 (1215)	45.37 (1152)	50 (23)	61 (28)

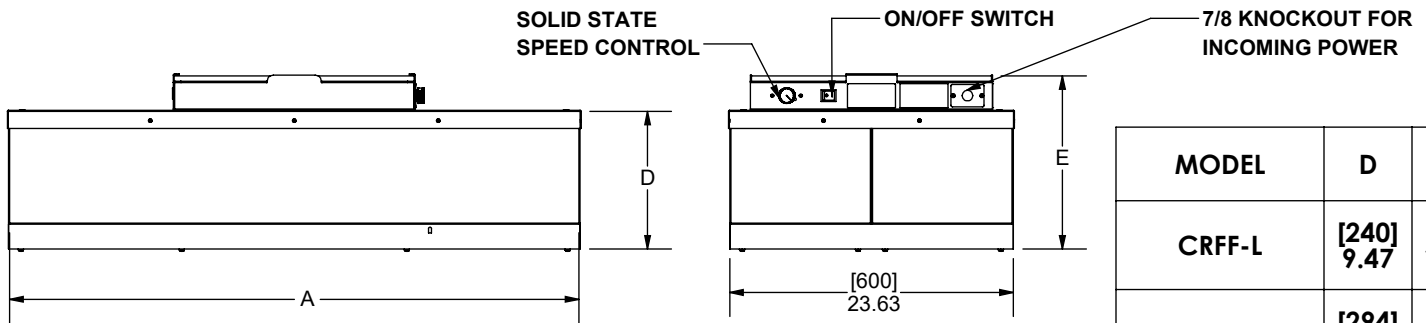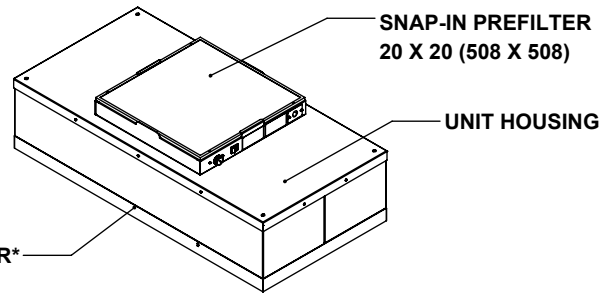

MODEL	D	E
CRFF-L	[240] 9.47	[319] 12.56
CRFF-L-ARSM	[294] 11.58	[373] 14.67

Features:

- Snap-In Prefilter
- Integrated Motorized Backward Inclined Impeller
- SSSC - Variable Speed Switch
- Lay-in Frame (Surface mount requires Accessory SMAW or SMASS)
- Meets UL507, UL900, IEST Recommended Practices
- Low watts, low profile, and low operating costs
- ARSM allows for roomside removable motor and filter*

Available Parts (Ordered separately):

- Round Duct Collar 10" (p/n:11231-001) or 12" (p/n:11231-002)
- 8FT Power Cord (p/n:S24344-001) (non-UL)
- Replacement Prefilter (p/n:62981-038)

Options:

PSC Motor

120V (1.8 FLA)
277V (0.8 FLA)

Filter

HEPA 99.99% @ 0.3 Micron UL900
ULPA 99.9995% @ 0.12 Micron UL900
Note: Replaceable / Accessible from room side*

Accessories

Filter Indicator Light (red)*
Run Indicator Light (green)*
Continuous Filter Monitor
Insulation (Top & Sides)
Surface Mount Frame

Finish

01 Mill Aluminum Casing with White Diffuser Screen
44 White Aluminum Casing with White Diffuser Screen
90 304 SS Casing with 304 SS Diffuser Screen
91 Mill Aluminum Casing with 304 SS Diffuser Screen

* CRFF-L-ARSM Only