



RFCRFF / RFCRFF-ARS

Reverse Flow, PSC, Backward Inclined Fan, and Filter Access*

SUBMITTAL SHEET

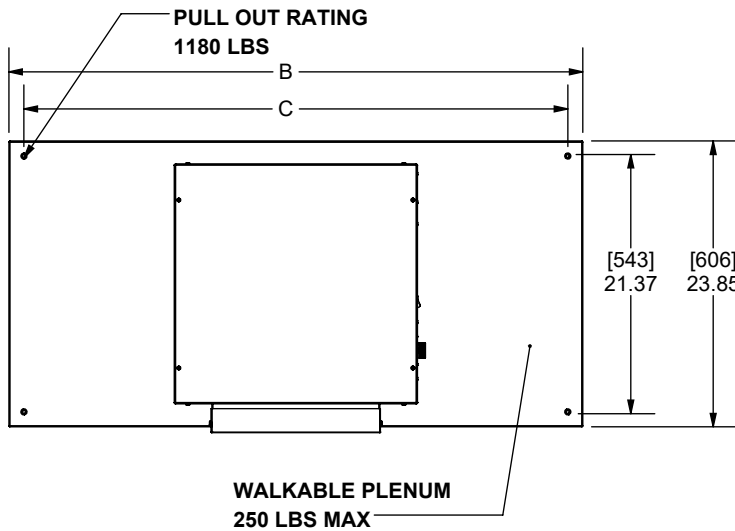

PANEL SIZE	A	B	C	RFCRFF WEIGHT LB (kg)	RFCRFF-ARS WEIGHT LB (kg)*
24 X 24	23.63 (600)	23.85 (606)	21.37 (543)	44 (20)	49 (22)
24 X 48	47.63 (1210)	47.85 (1215)	45.37 (1152)	62 (28)	70 (32)

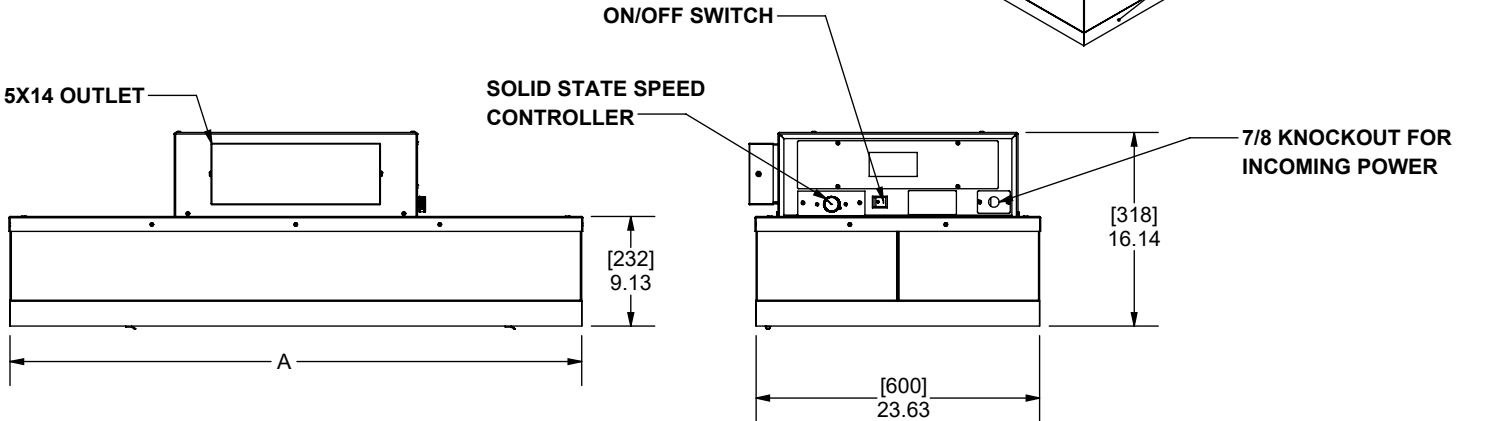

Features:

- Snap-In Prefilter
- Integrated Motorized Backward Inclined Impeller
- SSSC - Variable Speed Switch
- Lay-in Frame (Surface mount requires Accessory SMAW or SMASS)
- Meets UL507, UL900, IEST Recommended Practices
- 5" x 14" output is redirectable to support four directions
- Supports more than 700 CFM airflow
- ARS allows for roomside removable filter*

Available Parts (Ordered separately):

- 8FT Power Cord (p/n:S24344-001) (non-UL)
- Replacement Prefilter (p/n:269017-20201)*

Options:

PSC Motor

120V (1.8 FLA)
277V (0.8 FLA)

Filter

HEPA 99.99% @ 0.3 Micron UL900
ULPA 99.9995% @ 0.12 Micron UL900

Note: Replaceable / Accessible from room side*

Accessories

Filter Ships Loose*
Continuous Filter Monitor
Insulation (Top & Sides)
Surface Mount Frame

Finish

01 Mill Aluminum Casing with White Diffuser Screen
44 White Aluminum Casing with White Diffuser Screen
11 Mill AL Casing with CRS Diffuser Screen

* RFCRFF-ARS Only