


BEL-24

Linear Active Chilled Beam



CHILLED BEAMS

DIMENSIONAL DATA

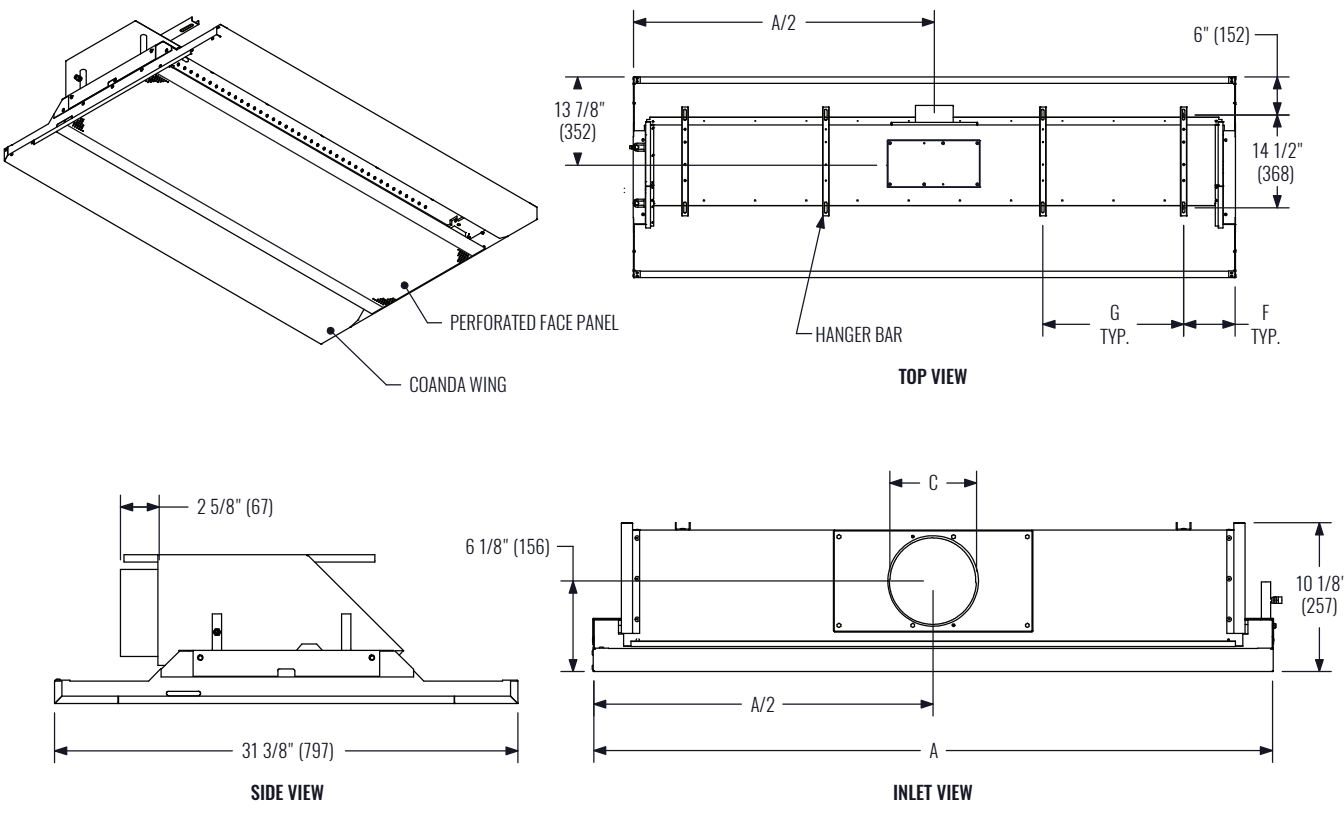


NOMINAL LENGTH	A	F	G
2 ft	22" (559)	3 1/2" (89)	
3 ft	34" (864)	4" (102)	
4 ft	46" (1168)	6" (152)	
5 ft	58" (1473)	8" (203)	---
6 ft	70" (1778)		
7 ft	82" (2083)		
8 ft	94" (2388)		22" (559)
9 ft	106" (2692)		25" (635)
10 ft	118" (2997)		30" (762)


NOMINAL INLET	C
4" ROUND	3 7/8" (98)
5" ROUND	4 7/8" (124)
6" ROUND	5 7/8" (149)
8" OVAL	5 1/4" x 9 3/8" (133 x 238)
10" OVAL	5 1/4" x 12 1/2" (133 x 318)

NOTE: Dimensions in parentheses are in millimeters.


PIPING & HANDING

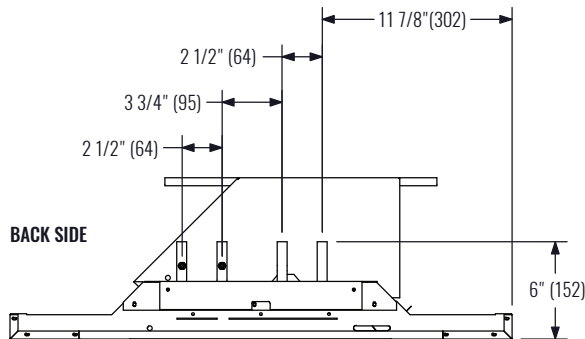

4 PIPE, LEFT HAND, SIDE INLET SHOWN

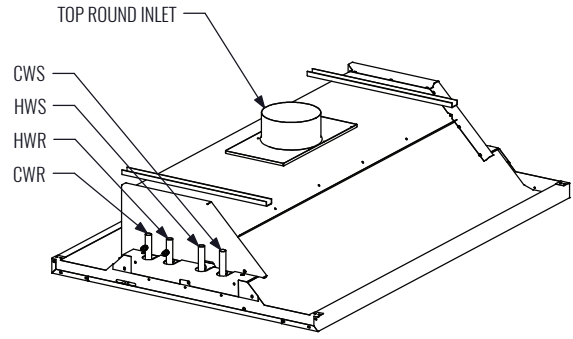


4 PIPE, RIGHT HAND, TOP INLET SHOWN

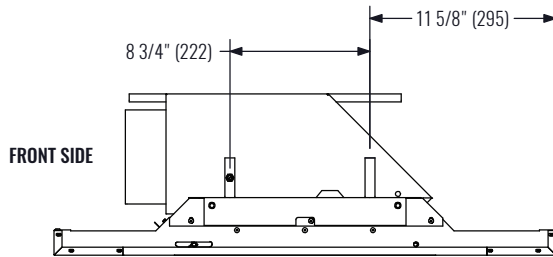

2 PIPE, RIGHT HAND, SIDE INLET SHOWN

THROW PATTERN
B - 1-WAY BACK

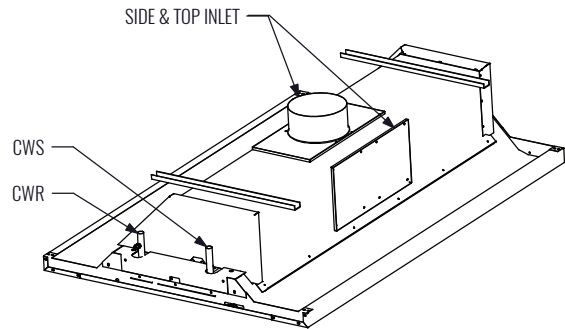


2 PIPE, LEFT HAND, TOP & SIDE INLET SHOWN


NOTE: Dimensions in parentheses are in millimeters.

CWS - Cold Water Supply
CWR - Cold Water Return
HWS - Hot Water Supply
HWR - Hot Water Return


THROW PATTERNS

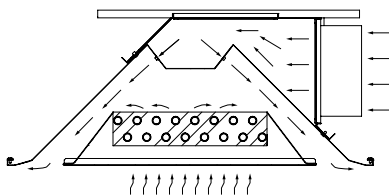

2-WAY

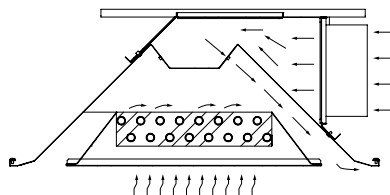

1-WAY (FRONT)

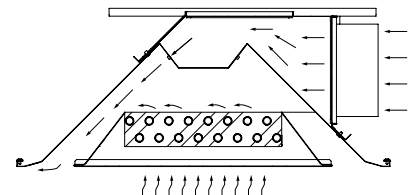

1-WAY (BACK)