


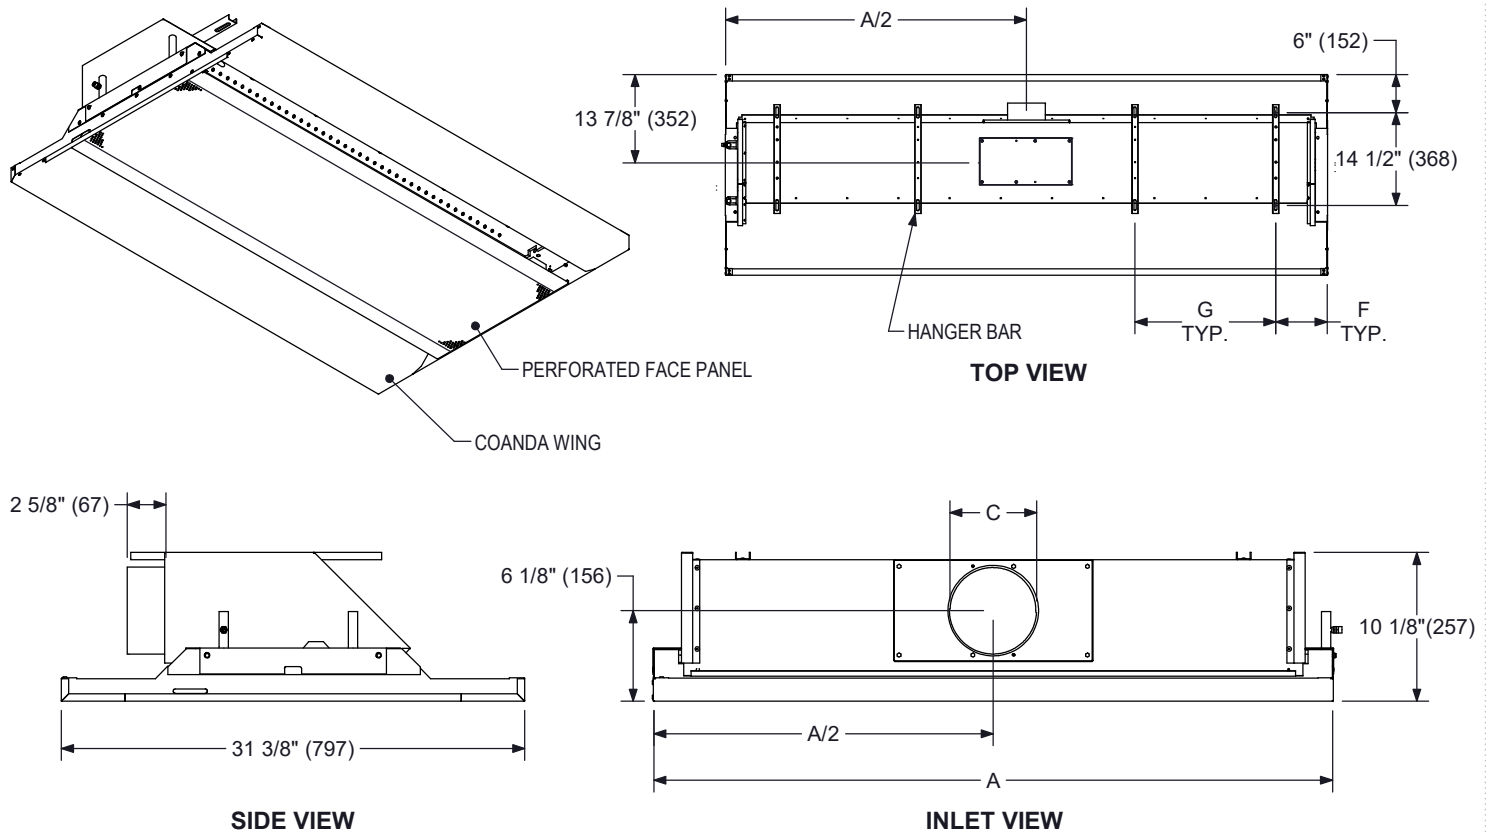

| NOMINAL LENGTH | A          | F          | G        |
|----------------|------------|------------|----------|
| 2 FT           | 22 (559)   | 3 1/2 (89) | -        |
| 3 FT           | 34 (864)   | 4 (102)    |          |
| 4 FT           | 46 (1168)  | 6 (152)    |          |
| 5 FT           | 58 (1473)  | 8 (203)    |          |
| 6 FT           | 70 (1778)  |            |          |
| 7 FT           | 82 (2083)  |            |          |
| 8 FT           | 94 (2388)  |            |          |
| 9 FT           | 106 (2692) |            |          |
| 10 FT          | 118 (2997) |            |          |
|                |            |            |          |
|                |            |            | 25 (635) |
|                |            |            | 30 (762) |

| NOMINAL INLET | C                          |
|---------------|----------------------------|
| 4 ROUND       | 3 7/8 (98)                 |
| 5 ROUND       | 4 7/8 (98)                 |
| 6 ROUND       | 5 7/8 (98)                 |
| 8 OVAL        | 5 1/4 (133) x 9 3/8 (238)  |
| 10 OVAL       | 5 1/4 (133) x 12 1/2 (318) |

### DESCRIPTION:

- 24" WIDE, LINEAR ACTIVE CHILLED BEAM, AVAILABLE WITH 1-WAY OR 2-WAY AIR PATTERNS.
- GALVANNEALED G90, 24 GAUGE SHEET METAL. MECHANICALLY SEALED, LEAK RESISTANT CONSTRUCTION.
- DESIGNED WITH INTEGRATED COANDA WINGS FOR EXPOSED INSTALLATIONS.
- CIRCULAR PERFORATED FACE PANEL IS HINGED ON BOTH SIDES TO PROVIDE ACCESS TO INTERNAL COMPONENTS.
- EXTERIOR FACE, BORDER ELEMENTS AND VISIBLE INTERNAL COMPONENTS ARE PAINTED TO MATCH ORDERED FINISH. PAINT IS POWDER COAT, A MIX OF POLYESTER AND EPOXY.
- COIL COMES STANDARD WITH AIR VENT & COIL DRAIN.

DIMENSIONS ARE GIVEN AS INCHES (MM)

Revision Date: 5/15/2026

Form: CB01-BEL-24

Replaces: NEW SUBMITTAL

Product Information is Subject to Change Without Notice







# KRUEGER

## BEL-24

CHILLED BEAM - EXPOSED ACTIVE LINEAR 24" WIDTH

JOB NAME \_\_\_\_\_  
ENGINEER \_\_\_\_\_  
CONTRACTOR \_\_\_\_\_  
TAG \_\_\_\_\_

## SUBMITTAL SHEET

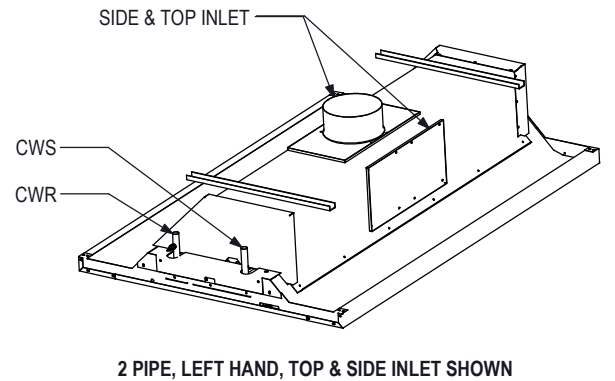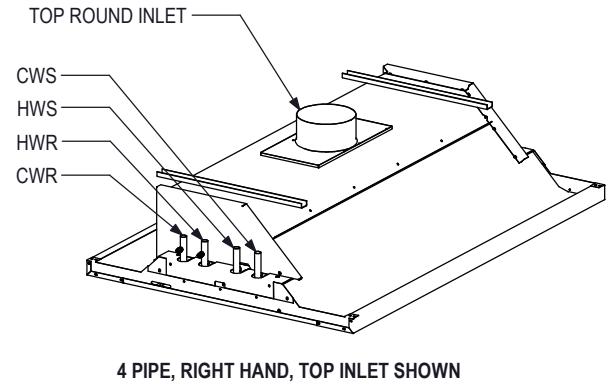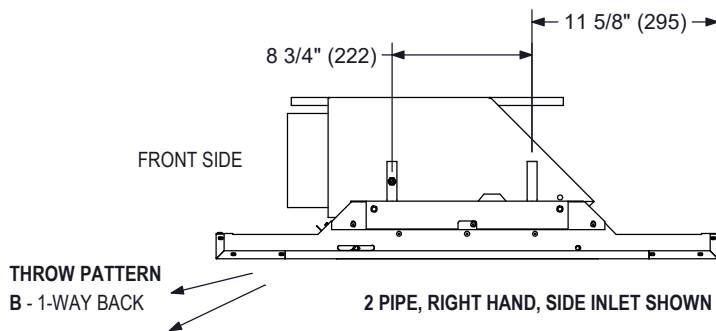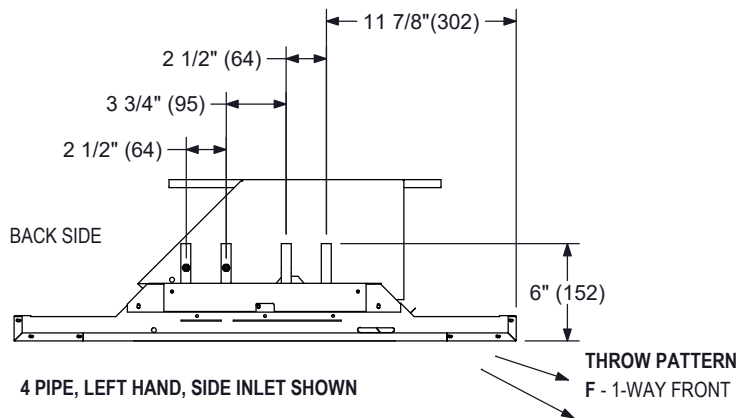

### CONFIGURATION OPTIONS:

#### LENGTH

- ☐ 2 - 2FT
- ☐ 3 - 3FT
- ☐ 4 - 4FT
- ☐ 5 - 5FT
- ☐ 6 - 6FT
- ☐ 7 - 7FT
- ☐ 8 - 8FT
- ☐ 9 - 9FT
- ☐ 10 - 10FT

#### NOZZLE CONFIGURATION

- ☐ M13
- ☐ M17
- ☐ M23
- ☐ M31

#### THROW PATTERN

- ☐ 2 - 2 WAY
- ☐ F - 1-WAY FRONT
- ☐ B - 1-WAY BACK

#### COIL TYPE

- ☐ 2P1C - 2 PIPE COIL - 1 CIRCUIT
- ☐ 2P2C - 2 PIPE COIL - 2 CIRCUIT
- ☐ 4P1C - 4 PIPE COIL - 1 CIRCUIT
- ☐ 4P2C - 4 PIPE COIL - 2 CIRCUIT

#### WATER CONNECTION

- ☐ L - LEFT HANDING
- ☐ R - RIGHT HANDING

#### PIPING CONNECTION

- ☐ SWT - SWEAT (STANDARD)
- ☐ MPT - 1/2" MALE PIPE THREAD
- ☐ 3PT - 3/4" MALE PIPE THREAD

#### INLET CONFIGURATION

- ☐ TM - TOP MIDDLE
- ☐ SM - SIDE MIDDLE
- ☐ MI - TOP & SIDE (FIELD HANDING SWAPPABLE)

#### INLET SIZE

- ☐ 4 - 4" ROUND
- ☐ 5 - 5" ROUND
- ☐ 6 - 6" ROUND
- ☐ 8 - 8" OVAL
- ☐ 10 - 10" OVAL

#### FINISH

- ☐ WHT - BRITISH WHITE
- ☐ BLK - BLACK

#### ACCESSORIES

- ☐ I - INTERNAL CLOSED CELL INSULATION
- ☐ LS - LINT SCREEN
- ☐ BHK - FLEXIBLE HOSE KIT (REQUIRES MPT)\*
- ☐ BFR - CONSTANT FLOW REGULATOR\*

\*ORDERED SEPARATELY. SEE CB71-ACC-00

DIMENSIONS ARE GIVEN AS INCHES (MM)

Revision Date: 5/15/2026

Form: CB01-BEL-24

Replaces: NEW SUBMITTAL

Product Information is Subject to Change Without Notice