

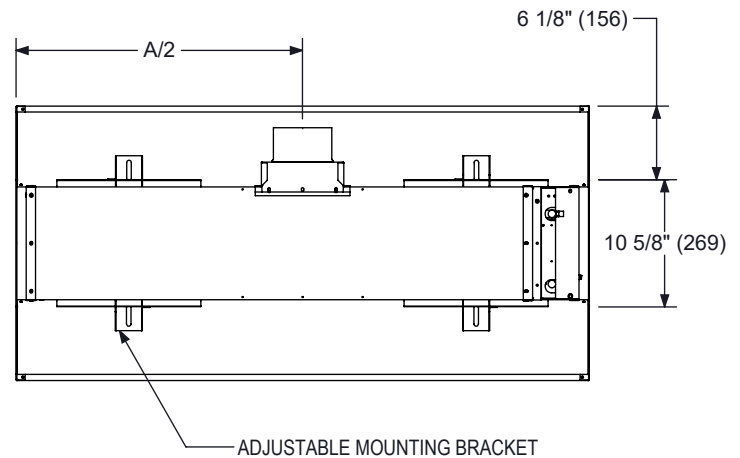


TOP VIEW

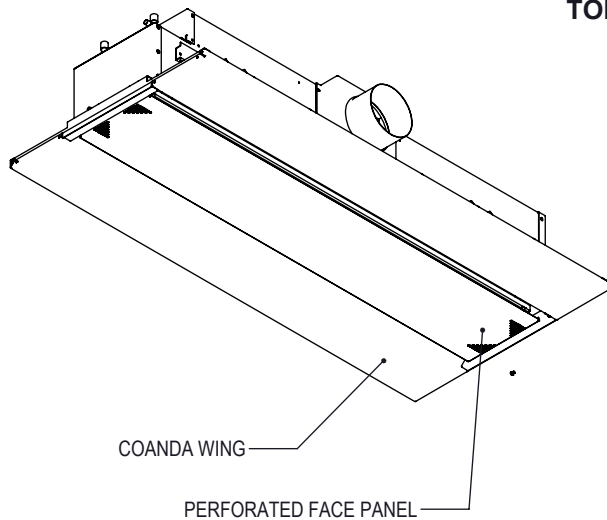


NOMINAL INLET	C
4 ROUND	3 7/8 (98)
5 ROUND	4 7/8 (124)
6 ROUND	5 7/8 (149)
8 OVAL	5 1/4 (133) x 9 3/8 (238)
10 OVAL	5 1/4 (133) x 12 1/2 (318)

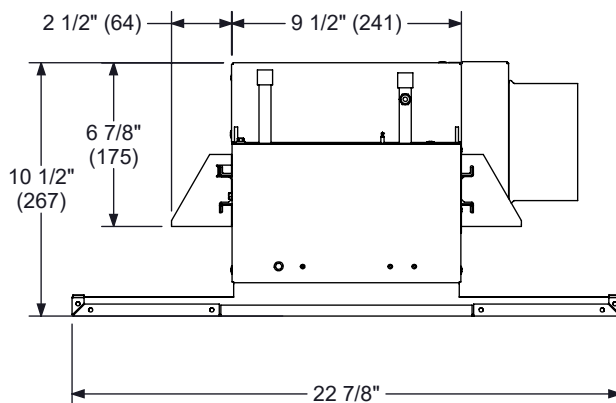

SIDE VIEW

NOMINAL LENGTH	A	E	F	G	Bracket Qty
2 FT	23 3/4 (582)	4 (102)	2 (51)	-	4
3 FT	35 3/4 (909)		4 (109)		
4 FT	47 3/4 (1213)	12 (305)	3 (76)		
5 FT	59 3/4 (1518)		6 (152)		
6 FT	71 3/4 (1822)		8 (203)		
7 FT	83 3/4 (2127)	6 (152)	10 (254)	12 (305)	8
8 FT	95 3/4 (2432)		6 (152)	17 (432)	
9 FT	107 3/4 (2737)			22 (559)	
10 FT	119 3/4 (3042)				

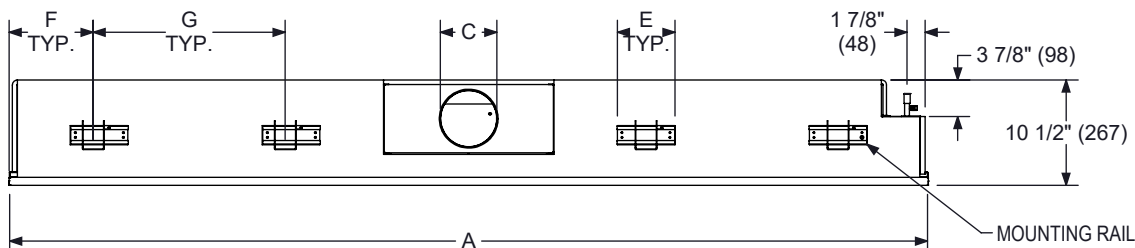

DESCRIPTION:

- 12" WIDE, LINEAR ACTIVE CHILLED BEAM, AVAILABLE WITH 1-WAY OR 2-WAY AIR PATTERNS.
- GALVANNEALED G90, 20 GAUGE SHEET METAL. MECHANICALLY SEALED, LEAK RESISTANT CONSTRUCTION.
- DESIGNED WITH INTEGRATED COANDA WINGS FOR EXPOSED INSTALLATIONS.
- PERFORATED FACE PANEL IS HINGED ON BOTH SIDES, TO PROVIDE ACCESS TO INTERNAL COMPONENTS.
- EXTERIOR FACE, BORDER ELEMENTS AND VISIBLE INTERNAL COMPONENTS ARE PAINTED TO MATCH ORDERED FINISH. PAINT IS POWDER COAT, A MIX OF POLYESTER AND EPOXY.
- RAILS WITH ADJUSTABLE MOUNTING BRACKETS ARE INCLUDED, QUANTITY VARIES BASED ON UNIT LENGTH.
- COIL COMES STANDARD WITH AIR VENT, COIL DRAIN & CONDENSATE PAN.


DIMENSIONS ARE GIVEN AS INCHES (MM)

Revision Date: 5/15/2026

Form: CB01-BEL-12


Replaces: NEW SUBMITTAL

Product Information is Subject to Change Without Notice

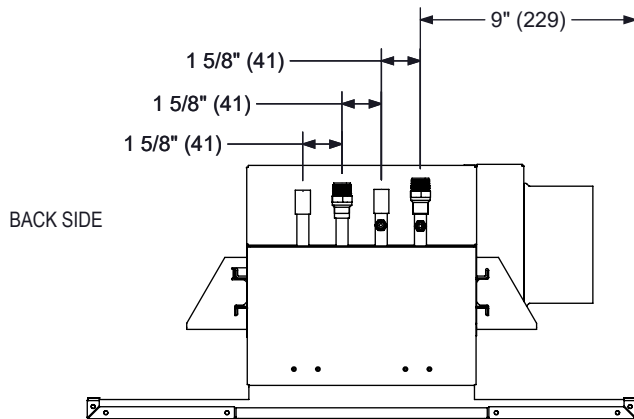


4 PIPE, LEFT HAND, SIDE INLET SHOWN


THROW PATTERN
F - 1-WAY FRONT

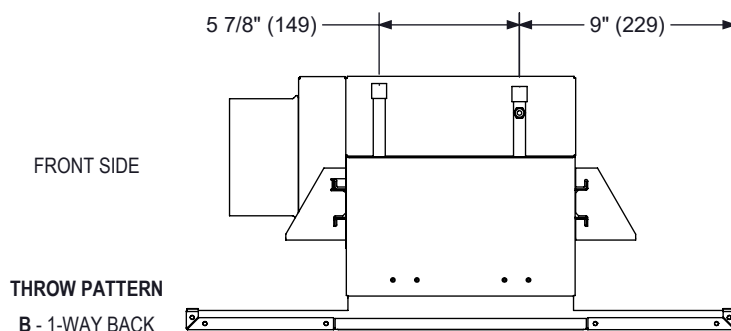

2 PIPE, RIGHT HAND, SIDE INLET SHOWN

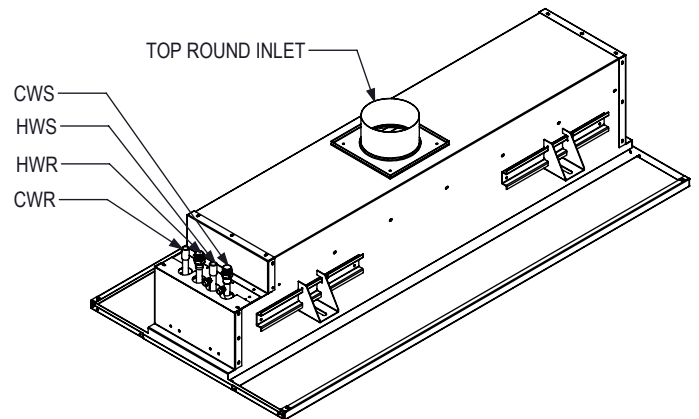

4 PIPE, RIGHT HAND, TOP INLET SHOWN

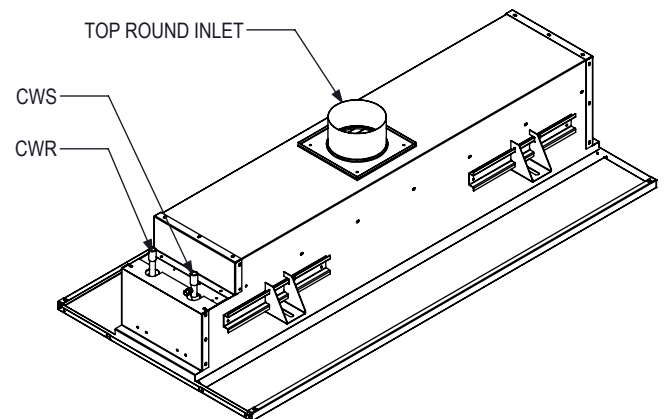

2 PIPE, LEFT HAND, TOP INLET SHOWN

CONFIGURATION OPTIONS:

LENGTH:

- ☐ 2 - 2FT
- ☐ 3 - 3FT
- ☐ 4 - 4FT
- ☐ 5 - 5FT
- ☐ 6 - 6FT
- ☐ 7 - 7FT
- ☐ 8 - 8FT
- ☐ 9 - 9FT
- ☐ 10 - 10FT

FRAME:

- ☐ LTF - 15/16" TEE
- ☐ NTG - NARROW TEE

NOZZLE CONFIGURATION:

- ☐ M13
- ☐ M17
- ☐ M23
- ☐ M31

THROW PATTERN:

- ☐ 2 - 2 WAY
- ☐ F - 1-WAY FRONT
- ☐ B - 1-WAY BACK

COIL TYPE

- ☐ 2P1C - 2 PIPE COIL - 1 CIRCUIT
- ☐ 2P2C - 2 PIPE COIL - 2 CIRCUIT
- ☐ 4P1C - 4 PIPE COIL - 1 CIRCUIT
- ☐ 4P2C - 4 PIPE COIL - 2 CIRCUIT

WATER CONNECTION:

- ☐ L - LEFT HANDING
- ☐ R - RIGHT HANDING

PIPING CONNECTION:

- ☐ SWT - 1/2" SWEAT (STANDARD)
- ☐ MPT - 1/2" MALE PIPE THREAD
- ☐ 3PT - 3/4" MALE PIPE THREAD

INLET CONFIGURATION:

- ☐ TM - TOP MIDDLE
- ☐ SM - SIDE MIDDLE

INLET SIZE:

- ☐ 4 - 4" ROUND
- ☐ 5 - 5" ROUND
- ☐ 6 - 6" ROUND
- ☐ 8 - 8" ROUND
- ☐ 10 - 10" ROUND

FINISH:

- ☐ WHT - BRITISH WHITE
- ☐ BLK - BLACK

ACCESSORIES:

- ☐ I - INTERNAL CLOSED CELL INSULATION
- ☐ LS - LINT SCREEN
- ☐ BHK - BEAM HOSE KIT (REQUIRES MPT)*
- ☐ BFR - BEAM FLOW REGULATOR*

* ORDERED SEPERATELY. SEE CB71-ACC-00.
DIMENSIONS ARE GIVEN AS INCHES (MM)