

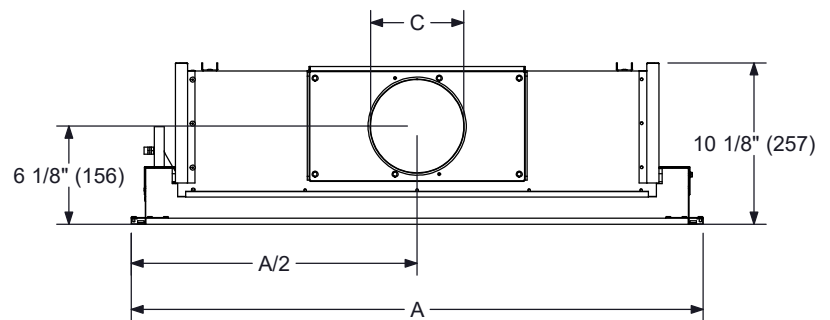
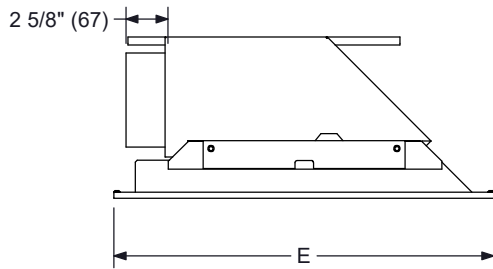
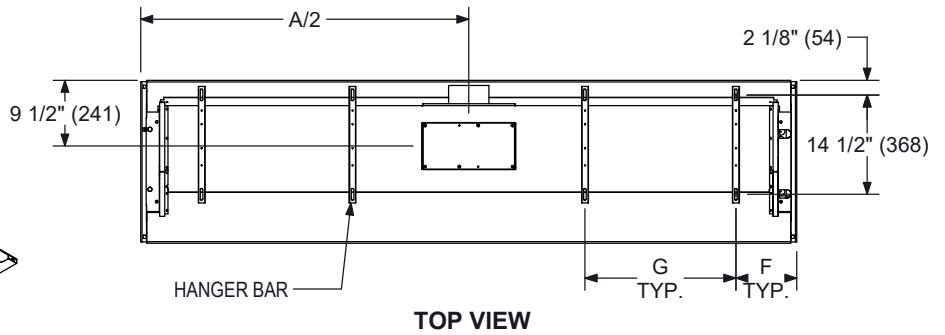


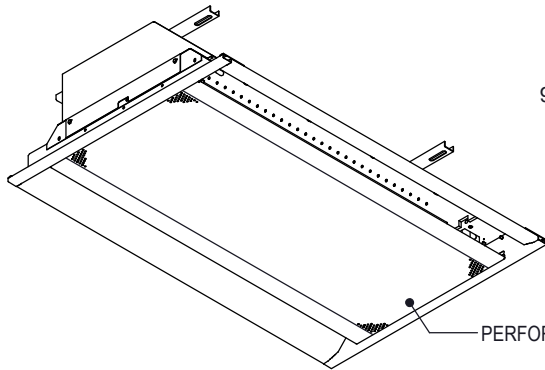

NOMINAL WIDTH	E
LTF	23 3/4 (603)
NTG	23 3/8 (594)

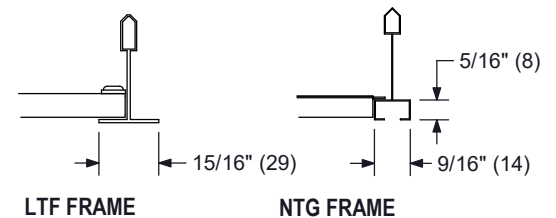

NOMINAL LENGTH	BORDER TYPE		F	G	
	LTF	NTG			
	A				
2 FT	23 3/4 (603)	23 3/8 (594)	4 1/2 (114)	-	
3 FT	35 3/4 (908)	35 3/8 (899)	4 7/8 (124)		
4 FT	47 3/4 (1213)	47 3/8 (1203)	6 7/8 (175)		
5 FT	59 3/4 (1518)	59 3/8 (1508)	8 7/8 (225)		
6 FT	71 3/4 (1822)	71 3/8 (1813)			
7 FT	83 3/4 (2127)	83 3/8 (2118)			
8 FT	95 3/4 (2432)	95 3/8 (2422)			22 (559)
9 FT	107 3/4 (2737)	107 3/8 (2727)			25 (635)
10 FT	119 3/4 (3041)	119 3/8 (3032)			30 (762)

NOMINAL INLET	C
4 ROUND	3 7/8 (98)
5 ROUND	4 7/8 (124)
6 ROUND	5 7/8 (149)
8 OVAL	5 1/4 (133) x 9 3/8 (238)
10 OVAL	5 1/4 (133) x 12 1/2 (318)

DESCRIPTION:

- 24" WIDE, LINEAR ACTIVE CHILLED BEAM, AVAILABLE WITH 1-WAY OR 2-WAY AIR PATTERNS.
- GALVANNEALED G90, 24 GAUGE SHEET METAL. MECHANICALLY SEALED, LEAK RESISTANT CONSTRUCTION.
- CIRCULAR PERFORATED FACE PANEL IS HINGED ON BOTH SIDES TO PROVIDE ACCESS TO INTERNAL COMPONENTS.
- EXTERIOR FACE, BORDER ELEMENTS AND VISIBLE INTERNAL COMPONENTS ARE PAINTED TO MATCH ORDERED FINISH. PAINT IS POWDER COAT, A MIX OF POLYESTER AND EPOXY.
- COIL COMES STANDARD WITH AIR VENT & COIL DRAIN.



DIMENSIONS ARE GIVEN AS INCHES (MM)

Revision Date: 5/15/2026



Form: CB01-BAL-24

Replaces: NEW SUBMITTAL

Product Information is Subject to Change Without Notice

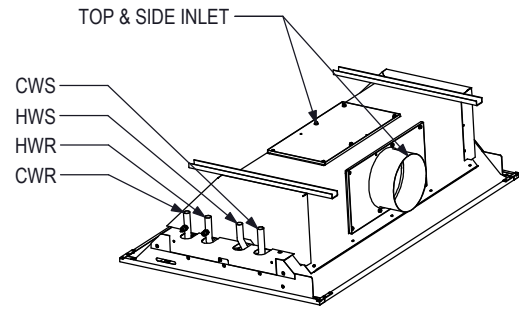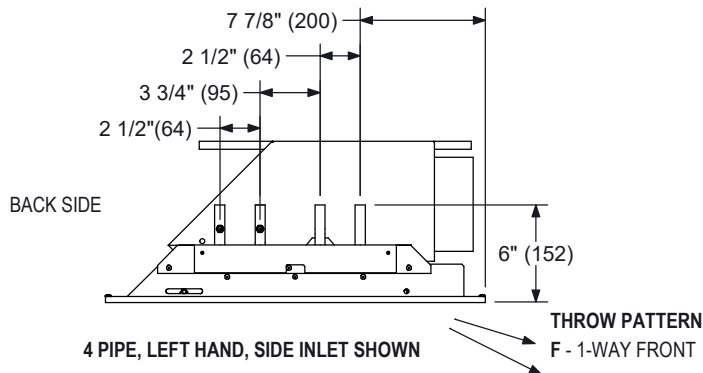

4 PIPE, LEFT HAND, TOP & SIDE INLET SHOWN

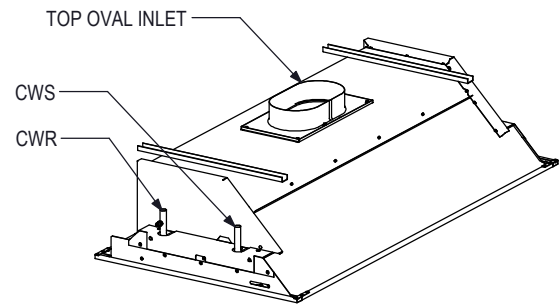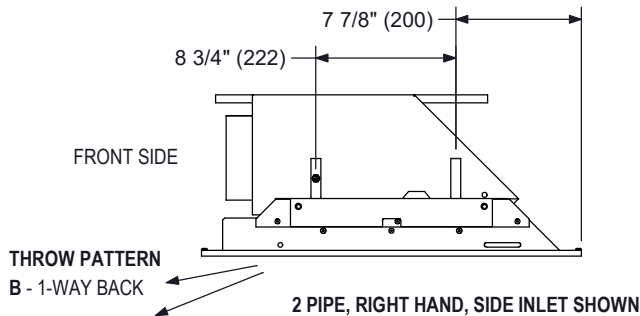

2 PIPE, RIGHT HAND, TOP INLET SHOWN

CONFIGURATION OPTIONS:

LENGTH

- ☐ 2 - 2FT
- ☐ 3 - 3FT
- ☐ 4 - 4FT
- ☐ 5 - 5FT
- ☐ 6 - 6FT
- ☐ 7 - 7FT
- ☐ 8 - 8FT
- ☐ 9 - 9FT
- ☐ 10 - 10FT

FRAME

- ☐ LTF - 15/16" TEE
- ☐ NTG - NARROW TEE

NOZZLE CONFIGURATION

- ☐ M13
- ☐ M17
- ☐ M23
- ☐ M31

THROW PATTERN

- ☐ 2 - 2 WAY
- ☐ F - 1-WAY FRONT
- ☐ B - 1-WAY BACK

COIL TYPE

- ☐ 2P1C - 2 PIPE COIL - 1 CIRCUIT
- ☐ 2P2C - 2 PIPE COIL - 2 CIRCUIT
- ☐ 4P1C - 4 PIPE COIL - 1 CIRCUIT
- ☐ 4P2C - 4 PIPE COIL - 2 CIRCUIT

WATER CONNECTION

- ☐ L - LEFT HANDING
- ☐ R - RIGHT HANDING

PIPING CONNECTION

- ☐ SWT - 1/2" SWEAT (STANDARD)
- ☐ MPT - 1/2" MALE PIPE THREAD
- ☐ 3PT - 3/4" MALE PIPE THREAD

INLET CONFIGURATION

- ☐ TM - TOP MIDDLE
- ☐ SM - SIDE MIDDLE
- ☐ MI - TOP & SIDE (FIELD HANDING SWAPPABLE)

INLET SIZE

- ☐ 4 - 4" ROUND
- ☐ 5 - 5" ROUND
- ☐ 6 - 6" ROUND
- ☐ 8 - 8" OVAL
- ☐ 10 - 10" OVAL

FINISH

- ☐ WHT - BRITISH WHITE
- ☐ BLK - BLACK

ACCESSORIES

- ☐ I - INTERNAL CLOSED CELL INSULATION
- ☐ LS - LINT SCREEN
- ☐ BHK - FLEXIBLE HOSE KIT (REQUIRES MPT)*
- ☐ BFR - CONSTANT FLOW REGULATOR*

*ORDERED SEPARATELY. SEE CB71-ACC-00

DIMENSIONS ARE GIVEN AS INCHES (MM)