
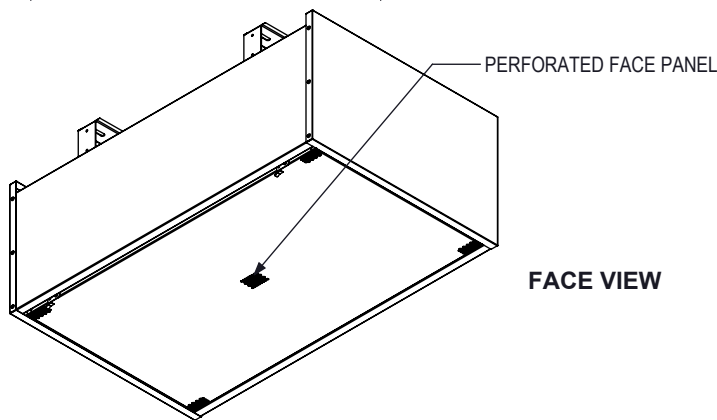
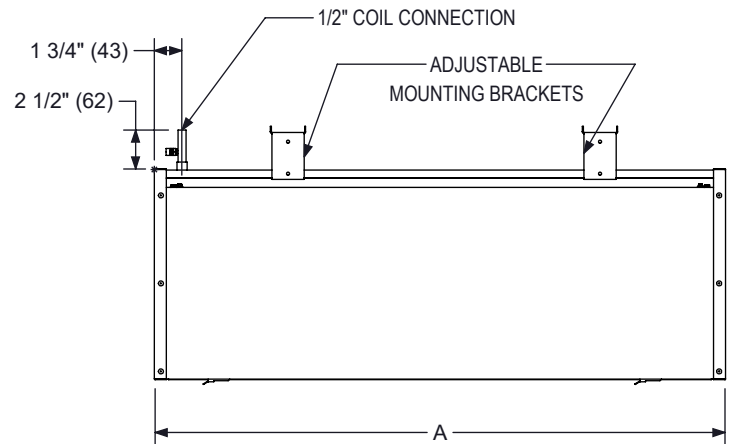


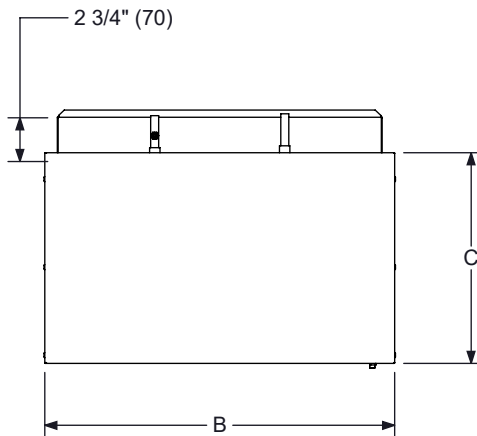

FACE VIEW

SIDE VIEW

NOMINAL LENGTH	A	BRACKET QTY
2 FT	23 7/8 (607)	2
3 FT	35 7/8 (911)	
4 FT	47 7/8 (1216)	3
5 FT	59 7/8 (1520)	
6 FT	71 7/8 (1825)	
7 FT	83 7/8 (2130)	
8 FT	95 7/8 (2435)	4
9 FT	107 7/8 (2740)	
10 FT	119 7/8 (3045)	

NOMINAL HEIGHT	C
8	9 1/8 (232)
10	11 1/8 (283)
12	13 1/8 (333)

NOMINAL WIDTH	B
13	12 3/4 (324)
18	17 3/4 (425)
24	23 3/4 (450)

CONFIGURATION OPTIONS:

LENGTH:

- ☐ 2 - 2FT
- ☐ 3 - 3FT
- ☐ 4 - 4FT
- ☐ 5 - 5FT
- ☐ 6 - 6FT
- ☐ 7 - 7FT
- ☐ 8 - 8FT
- ☐ 9 - 9FT
- ☐ 10 - 10FT

WIDTH:

- ☐ 13 - 13"
- ☐ 18 - 18"
- ☐ 24 - 24"

HEIGHT:

- ☐ 8 - 8"
- ☐ 10 - 10"
- ☐ 12 - 12"

PIPING CONNECTION:

- ☐ **SWT** - 1/2" SWEAT (STANDARD)
- ☐ **MPT** - 1/2" MALE PIPE THREAD
- ☐ **3PT** - 3/4" MALE PIPE THREAD

COIL ACCESSORIES:

- ☐ **D** - COIL DRAIN

FINISH:

- ☐ **WHT** - BRITISH WHITE
- ☐ **BLK** - BLACK

ACCESORIES:

- ☐ **I** - INTERNAL CLOSED CELL INSULATION
- ☐ **BHK** - BEAM HOSE KIT (REQUIRES MPT)*
- ☐ **BFR** - BEAM FLOW REGULATOR*

* ORDERED SEPERATELY. SEE **CB71-ACC-00**.

DESCRIPTION:

- EXPOSED PASSIVE CHILLED BEAM DIFFUSER, WITH REMOVABLE PERFORATED FACE
- CONSTRUCTION OF UNIT CASING IS FROM A MINIMUM OF 22-GAUGE GALVANIZED SHEET STEEL.
- EXTERIOR FACE, BORDER ELEMENTS AND VISIBLE INTERNAL COMPONENTS ARE PAINTED TO MATCH ORDERED FINISH. PAINT IS POWDER COAT, A MIX OF POLYESTER AND EPOXY.
- COIL COMES STANDARD WITH AIR VENT.

DIMENSIONS ARE GIVEN AS INCHES (MM)

Revision Date: **5/15/2026**

Form: **CB51-BEP-00**

Replaces: **NEW SUBMITTAL**

Product Information is Subject to Change Without Notice