

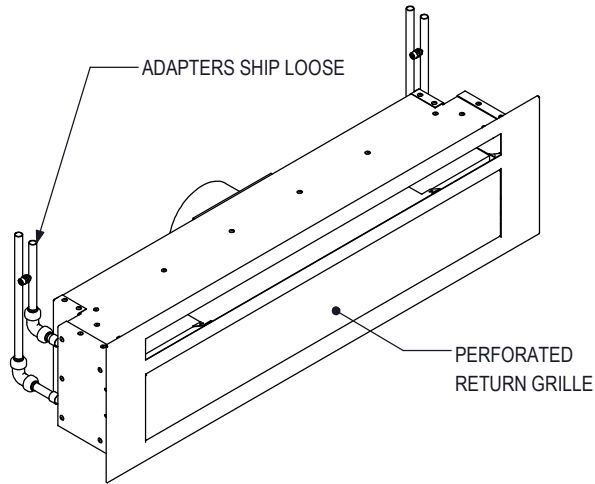


TOP VIEW

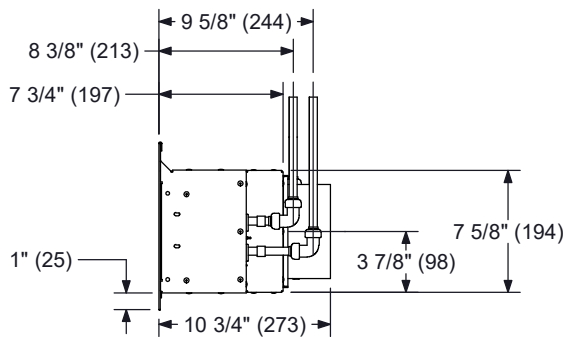

SIDE VIEW

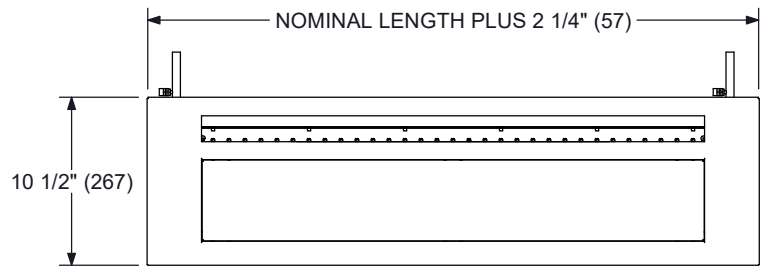

FRONT VIEW

NOMINAL INLET	B
4 ROUND	3 7/8 (98)
5 ROUND	4 7/8 (124)
6 ROUND	5 7/8 (149)
8 OVAL	9 3/8 (238) X 5 1/4 (133)

DESCRIPTION:

- ACTIVE CHILLED BEAM FOR CONCEALED SIDEWALL MOUTING, AVAILABLE WITH 1-WAY AIR PATTERN.
- GALVANNEALED G90, 20 GAUGE SHEET METAL. MECHANICALLY SEALED, LEAK RESISTANT CONSTRUCTION.
- DESIGNED WITH A SHALLOW PROFILE FOR LOW HEIGHT CONSTRUCTION AND RETROFIT PROJECTS.
- ADAPTERS ARE FIELD SOLDERED SWEAT CONNECTIONS.
- CIRCULAR PERFORATED FACE PANEL IS REMOVABLE TO PROVIDE ACCESS TO INTERNAL COMPONENTS.
- EXTERIOR FACE, BORDER ELEMENTS AND VISIBLE INTERNAL COMPONENTS ARE PAINTED TO MATCH ORDERED FINISH. PAINT IS POWDER COAT, A MIX OF POLYESTER AND EPOXY.
- COIL COMES STANDARD WITH AIR VENT.



DIMENSIONS ARE GIVEN AS INCHES (MM)

Revision Date: 5/15/26


Form: CB61-BAW-00

Replaces: NEW SUBMITTAL




Product Information is Subject to Change Without Notice

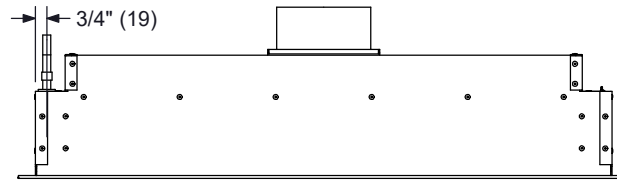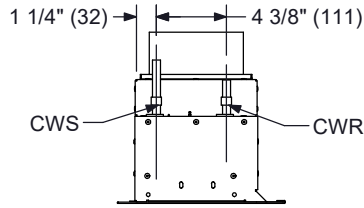




2 PIPE LEFT HAND

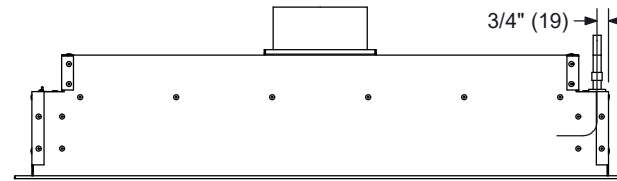


2 PIPE RIGHT HAND

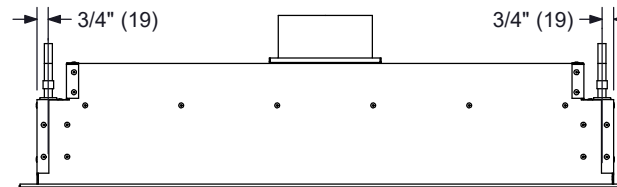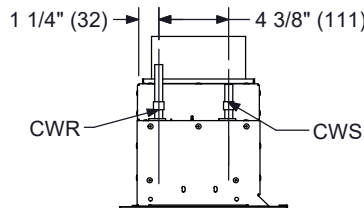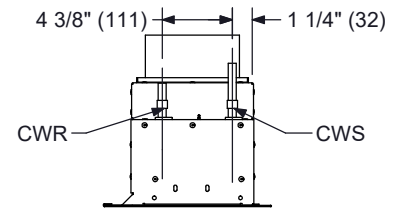

4 PIPE LEFT HAND

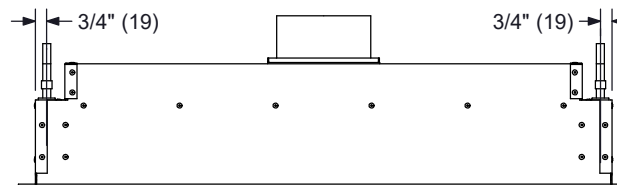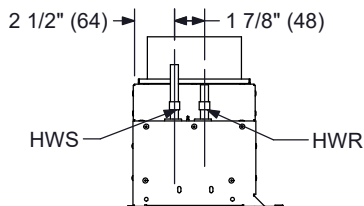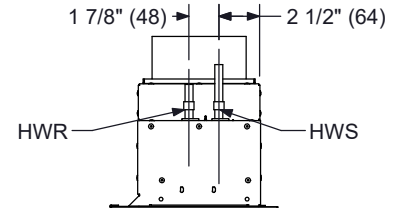

4 PIPE RIGHT HAND

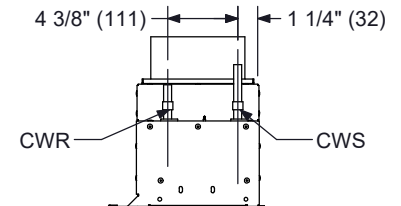

NOTE: CW HANDING IS DETERMINED FACING UNIT DISCHARGE.

CONFIGURATION OPTIONS:

LENGTH:

- ☐ 2 - 2 FT
- ☐ 3 - 3 FT
- ☐ 4 - 4 FT
- ☐ 5 - 5 FT
- ☐ 6 - 6 FT
- ☐ 7 - 7 FT
- ☐ 8 - 8 FT
- ☐ 9 - 9 FT
- ☐ 10 - 10 FT

NOZZLE CONFIGURATION:

- ☐ M13
- ☐ M17
- ☐ M23
- ☐ M31

COIL TYPE:

- ☐ 2P1C - 2 PIPE COIL - 1 CIRCUIT
- ☐ 4P1C - 4 PIPE COIL - 1 CIRCUIT

COIL ACCESSORY:

- ☐ D - COIL DRAIN

CW COIL CONNECTION:

- ☐ L - LEFT HAND
- ☐ R - RIGHT HAND

PIPING CONNECTION:

- ☐ SWT - 1/2" SWEAT (STANDARD)
- ☐ MPT - 1/2" MALE PIPE THREAD

INLET SIZE:

- ☐ 4 - 4" ROUND
- ☐ 5 - 5" ROUND
- ☐ 6 - 6" ROUND
- ☐ 8 - 8" OVAL

ACCESSORIES:

- ☐ I - INTERNAL CLOSED CELL INSULATION
- ☐ BHK - BEAM HOSE KIT (REQUIRES MPT)*
- ☐ BFR - BEAM FLOW REGULATOR*

FINISH:

- ☐ BLK - BLACK
- ☐ WHT - WHITE

*ORDERED SEPARATELY. SEE CB71-ACC00.

DIMENSIONS ARE GIVEN AS INCHES (MM)