


JOB NAME _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 LOCATION _____

SUBMITTAL SHEET
 Form Number TS0001-EC.2 Effective Date 7/04
 Replaces Form TS0001-EC.1



LMHS
ATTENUATOR UNIT - ELECTRIC or ELECTRONIC CONTROL

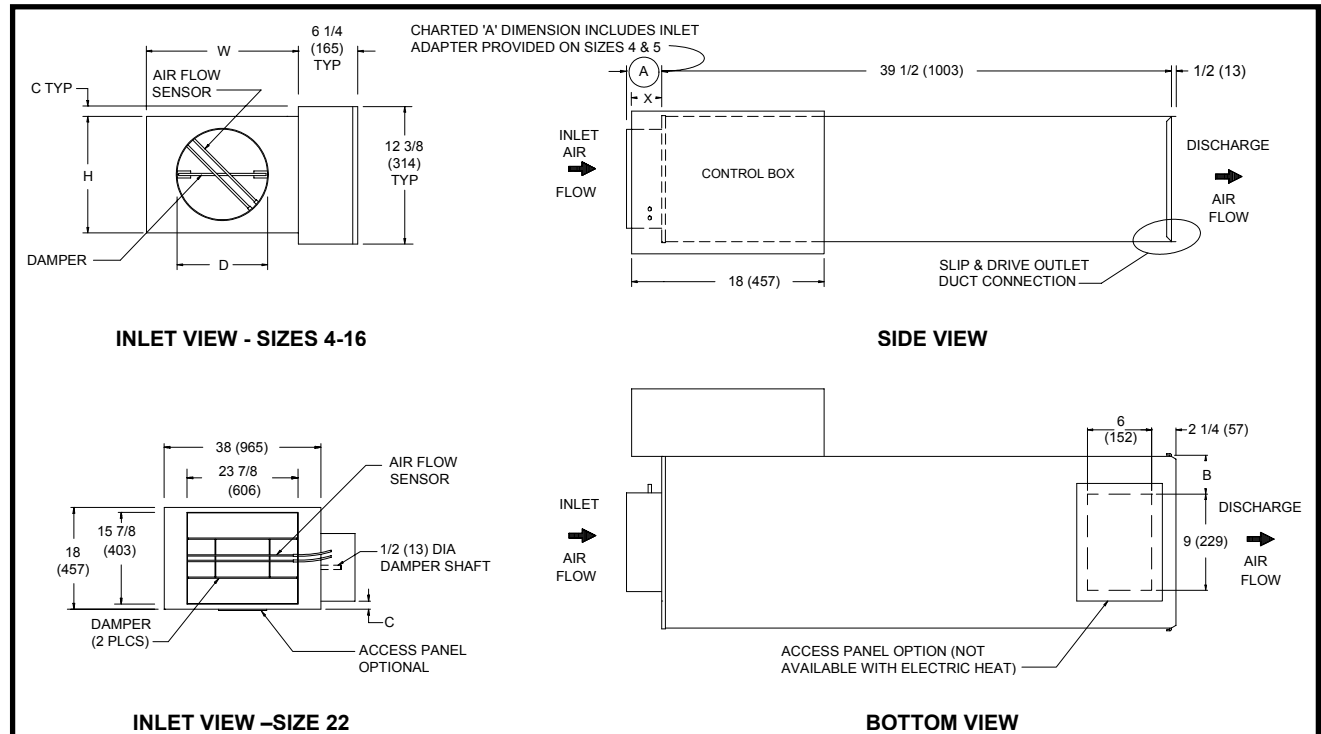

- STANDARD FEATURES:**
- 22 Ga. Zinc coated steel construction.
 - **NEMA 1** steel control enclosure for electric or electronic components
 - 1/2" thick dual density fiberglass insulation meeting **NFPA 90A** and **UL 181** safety requirements.
 - Linear averaging sensor.
 - Variety of electric, analog, and digital control packages for pressure dependent and pressure independent systems.
 - **ETL** listed – Adherence to **UL 429** for electrically operated valves.

- OPTIONAL FEATURES:**
- 20 Ga. Zinc coated steel construction
 - > Liners:
 - Cellular insulation
 - Steriliner
 - Sterilwall
 - Perf double wall
 - 1" dual density fiberglass insulation
 - Four quadrant averaging cross flow sensor
 - Disconnect switch for electronic controls.
 - 24 volt transformer.
 - Left hand controls.
 - Right hand controls.
 - Bottom access panel
 - Hanger brackets.
 - Dust tight control enclosure.
 - Cam lock bottom access panel

NOTE: Right hand configuration shown, left hand available.

DIMENSIONS ARE GIVEN AS INCHES (MM)

INLET SIZE	NOM MAX CFM (L/s)	W	H	A	B	C	D	X
4	230 (109)	12 (305)	8 (203)	5 3/8 (136)	1 1/2 (38)	2 1/8 (54)	3 7/8 (98)	7 1/4 (184)
5	360 (170)	12 (305)	8 (203)	5 3/8 (136)	1 1/2 (38)	2 1/8 (54)	4 7/8 (124)	7 1/4 (184)
6	520 (245)	12 (305)	8 (203)	3 3/8 (86)	1 1/2 (38)	2 1/8 (54)	5 7/8 (149)	7 1/4 (184)
7	710 (335)	12 (305)	10 (254)	3 3/8 (86)	1 1/2 (38)	1 1/8 (29)	6 7/8 (175)	7 1/4 (184)
8	925 (437)	12 (305)	10 (254)	3 3/8 (86)	1 1/2 (38)	1 1/8 (29)	7 7/8 (200)	7 1/4 (184)
9	1200 (566)	14 (356)	12 1/2 (318)	3 3/8 (86)	2 1/2 (64)	-	8 7/8 (225)	5 1/4 (133)
10	1450 (685)	14 (356)	12 1/2 (318)	3 3/8 (86)	2 1/2 (64)	-	9 7/8 (251)	5 1/4 (133)
12	2100 (991)	16 (406)	15 (381)	3 3/8 (86)	3 1/2 (89)	-	11 7/8 (302)	5 1/4 (133)
14	2900 (1369)	20 (508)	17 1/2 (445)	3 3/8 (86)	5 1/2 (140)	-	13 7/8 (352)	3 1/4 (83)
16	3700 (1746)	24 (610)	18 (457)	3 3/8 (86)	7 1/2 (191)	-	15 7/8 (403)	3 1/4 (83)
22	7100 (3351)	38 (965)	18 (457)	4 1/4 (108)	14 1/2 (368)	1 1/8 (29)	SEE ABOVE	5 1/4 (133)