

JOB NAME \_\_\_\_\_  
 ARCHITECT \_\_\_\_\_  
 ENGINEER \_\_\_\_\_  
 CONTRACTOR \_\_\_\_\_  
 LOCATION \_\_\_\_\_

**SUBMITTAL SHEET**  
 Form Number TS0022-EC.1 Effective Date 7/04  
 Replaces Form TS0022-EC



**LMHS**  
**MULTI-OUTLET UNIT WITH HOT WATER HEAT - ELECTRONIC**

**RIGHT HAND INLET VIEW**

**RIGHT HAND SIDE VIEW**

**BOTTOM VIEW (RH)**

**STANDARD FEATURES:**

- 22 Ga. Zinc coated steel construction.
- **NEMA 1** steel control enclosure for electric or electronic components
- 1/2" thick dual density fiberglass insulation meeting **NFPA 90A** and **UL 181** safety requirements.
- Linear averaging sensor.
- Variety of analog and digital control packages for pressure independent systems.
- **ETL** listed – Adherence to **UL429** for electrically operated valves
- Left hand and right hand control configurations are available. (right hand shown above)
- Hot water coil connection. (right hand shown above)


**NOTES :**

1. Multiple outlets are not available on size 22.
2. See Form **TS0004** for basic **LMHS** unit information.
3. See Form **TS0003** for additional outlet information.
4. See Form **TS0005** for water coil information.

**OPTIONAL FEATURES:**

- 20 Ga. Zinc coated steel construction
- Liners:
  - Cellular insulation
  - Steriliner
  - 1" dual density fiberglass insulation
- Four quadrant averaging cross flow sensor
- Disconnect switch for electronic controls
- 24 volt transformer.
- Right hand control.
- Left hand control.
- Right hand water coil connection.
- Left hand water coil connection
- Hanger brackets
- Dust tight control enclosure
- Bottom access panel
- Cam lock bottom access panel

**DIMENSIONS ARE SHOWN AS INCHES (MM)**

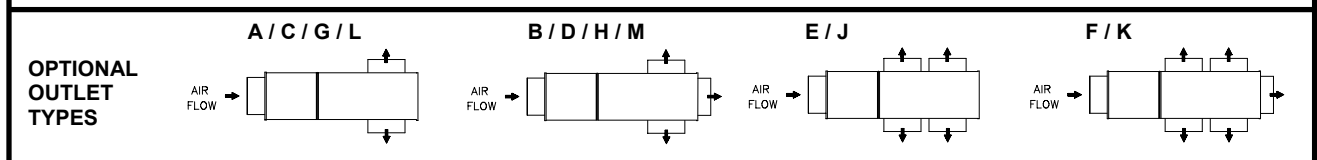

LMHS MULTI-OUTLET UNIT WITH HOT WATER HEAT									
INLET SIZE	NOM MAX CFM (L/s)	W	H	A	B	C	D	Lc	OUTLET TYPES
4	230 (109)	12 (305)	8 (203)	5 3/8 (136)	1 1/2 (38)	2 1/8 (54)	3 7/8 (98)	SEE FORM TS0005	A / B
5	360 (170)	12 (305)	8 (203)	5 3/8 (136)	1 1/2 (38)	2 1/8 (54)	4 7/8 (124)		A / B
6	520 (245)	12 (305)	8 (203)	3 3/8 (86)	1 1/2 (38)	2 1/8 (54)	5 7/8 (149)		A / B
7	710 (335)	12 (305)	10 (254)	3 3/8 (86)	1 1/2 (38)	1 1/8 (29)	6 7/8 (175)		C / D / E
8	925 (437)	12 (305)	10 (254)	3 3/8 (86)	1 1/2 (38)	1 1/8 (29)	7 7/8 (200)		C / D / E / F
9	1200 (566)	14 (356)	12 1/2 (318)	3 3/8 (86)	2 1/2 (64)	-	8 7/8 (225)		D / E / G / H / J
10	1450 (685)	14 (356)	12 1/2 (318)	3 3/8 (86)	2 1/2 (64)	-	9 7/8 (251)		D / E / G / H / J
12	2100 (991)	16 (406)	15 (381)	3 3/8 (86)	3 1/2 (89)	-	11 7/8 (302)		H / J / K / L / M
14	2900 (2900)	20 (508)	17 1/2 (445)	3 3/8 (86)	5 1/2 (140)	-	13 7/8 (352)		H / J / K / L / M
16	3700 (1746)	24 (610)	18 (457)	3 3/8 (86)	7 1/2 (191)	-	15 7/8 (403)		H / J / K / L / M