

JOB NAME _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 LOCATION _____

SUBMITTAL SHEET
 Form Number TS0022-PS.1 Effective Date 7/04
 Replaces Form TS0022-PS



LMHS
MULTI-OUTLET UNIT WITH HOT WATER HEAT - PNEUMATIC - SINGLE FUNCTION

RIGHT HAND INLET VIEW

RIGHT HAND SIDE VIEW

BOTTOM VIEW (RH)

STANDARD FEATURES :

- 22 Ga. Zinc coated steel construction.
- 1/2" thick dual density fiberglass insulation meets NFPA 90A and UL 181 safety requirements.
- Linear averaging sensor.
- Pneumatic pressure independent controls.
- Compressed air consumption : 0.5 scfh @ 20 psig.
- Left hand and right hand control configurations are available. (right hand shown above)
- Hot water coil connection (right hand shown above)


NOTES :

1. Multiple outlets are not available on size 22.
2. See Form TS0004 for basic LMHS unit information.
3. See Form TS0003 for additional outlet information.
4. See Form TS0005 for water coil information.

DIMENSIONS ARE SHOWN AS INCHES (MM)

OPTIONAL FEATURES :

- 20 Ga. Zinc coated steel construction
- Liners:
 - Cellular insulation
 - Steriliner
 - 1" dual density fiberglass insulation
- Four quadrant averaging cross flow sensor
- Direct acting thermostat with normally open damper
- Reverse acting thermostat with normally closed damper.
- Left hand control. Right hand control.
- Left hand water coil connection Right hand water coil connection.
- Bottom access panel Hanger brackets.
- Cam lock bottom access panel

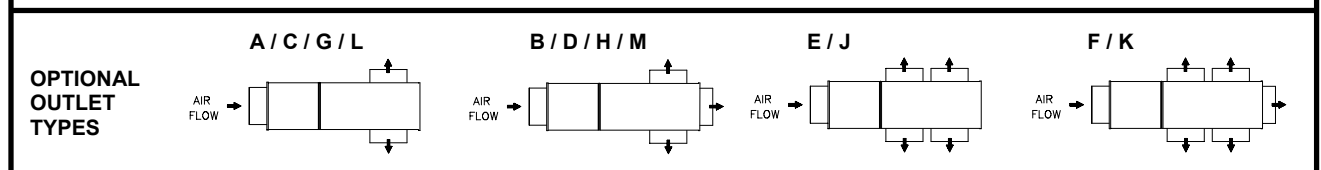

LMHS MULTI-OUTLET UNIT								
INLET SIZE	NOM MAX CFM (L/s)	W	H	A	B	D	Lc	OUTLET TYPES
4	230 (109)	12 (305)	8 (203)	5 3/8 (136)	1 1/2 (38)	3 7/8 (98)	SEE FORM TS0005	A / B
5	360 (170)	12 (305)	8 (203)	5 3/8 (136)	1 1/2 (38)	4 7/8 (124)		A / B
6	520 (245)	12 (305)	8 (203)	3 3/8 (86)	1 1/2 (38)	5 7/8 (149)		A / B
7	710 (335)	12 (305)	10 (254)	3 3/8 (86)	1 1/2 (38)	6 7/8 (175)		C / D / E
8	925 (437)	12 (305)	10 (254)	3 3/8 (86)	1 1/2 (38)	7 7/8 (200)		C / D / E / F
9	1200 (566)	14 (356)	12 1/2 (318)	3 3/8 (86)	2 1/2 (64)	8 7/8 (225)		D / E / G / H / J
10	1450 (685)	14 (356)	12 1/2 (318)	3 3/8 (86)	2 1/2 (64)	9 7/8 (251)		D / E / G / H / J
12	2100 (991)	16 (406)	15 (381)	3 3/8 (86)	3 1/2 (89)	11 7/8 (302)		H / J / K / L / M
14	2900 (2900)	20 (508)	17 1/2 (445)	3 3/8 (86)	5 1/2 (140)	13 7/8 (352)		H / J / K / L / M
16	3700 (1746)	24 (610)	18 (457)	3 3/8 (86)	7 1/2 (191)	15 7/8 (403)		H / J / K / L / M