

JOB NAME _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 LOCATION _____


SUBMITTAL SHEET
 Form Number TUS0334 Effective Date 10/03
 replaces New



KQFS / KQFP
HOT WATER COILS - 1 ROW & 2 ROW


MODEL	UNIT SIZE	W	H	D
KQFP/ KQFS 1 ROW	2	17" (432 mm)	15 1/8" (384 mm)	13 3/4" (349 mm)
	3			
	4			
	5	25" (635 mm)	17 5/8" (448 mm)	16 1/4" (413 mm)
6				
7				

MODEL	UNIT SIZE	W	H	D
KQFP/ KQFS 2 ROW	2	17" (432 mm)	15 1/8" (384 mm)	13 3/4" (349 mm)
	3			
	4			
	5	25" (635 mm)	17 5/8" (448 mm)	16 1/4" (413 mm)
6				
7				

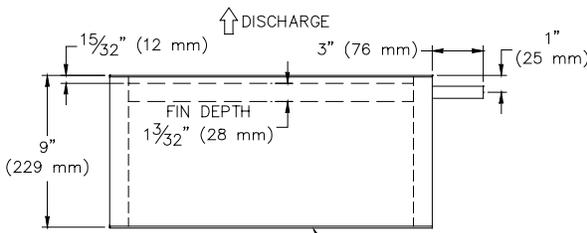


1 ROW HOT WATER COIL

MOUNTING HOLES ON THIS FLANGE SIDE ONLY

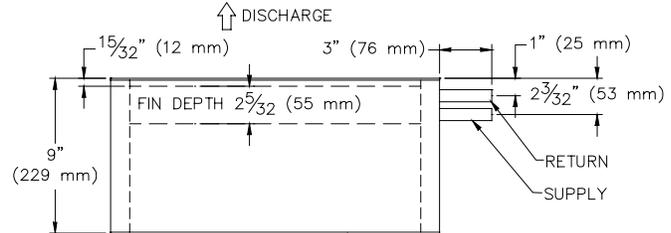

2 ROW HOT WATER COIL

MOUNTING HOLES ON THIS FLANGE SIDE ONLY

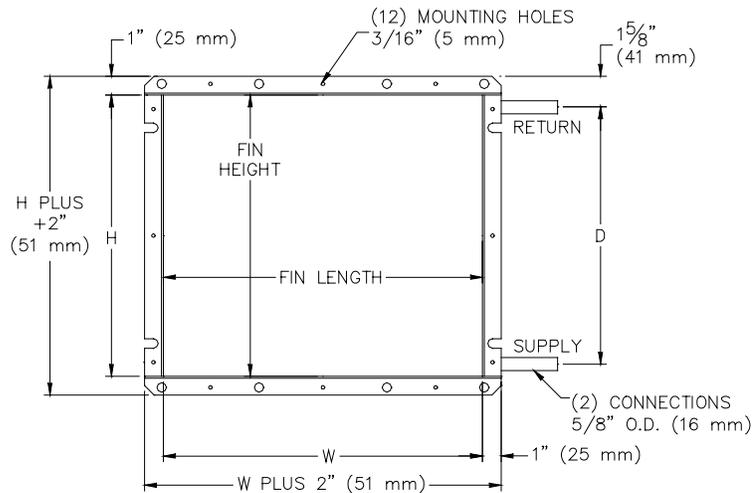

STANDARD FEATURES:

- Connection Tubing - .63" diameter male fitting.
- Coil Casing - 20 Ga. Galvanized steel.
- Coil Tubing - .50" diameter x .017" thick copper.
- Coil Fins - .0045" thick aluminum, 10 per inch, mechanically bonded to tubing.
- Coils are leak tested to 400 psi
- Coils are not for steam applications

OPTIONS:

Coils are available with a vent and drain

NOTE: Dimensions are given in inches and (mm)