

JOB NAME _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 LOCATION _____


SUBMITTAL SHEET
 Form Number DS0803.1 Effective Date 3/01
 Replaces FORM DS0803




AVDP 24 / 5AVDP 24

SQUARE PLAQUE STYLE, THERMALLY ACTUATED CEILING DIFFUSER

☐ **AVDP**
☐ **5AVDP**
 REF FR23

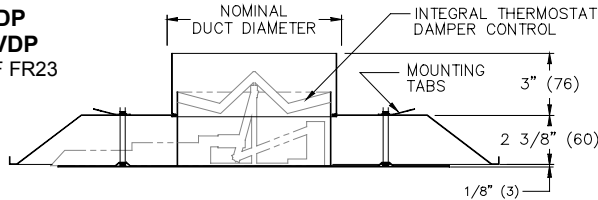

CROSS SECTION

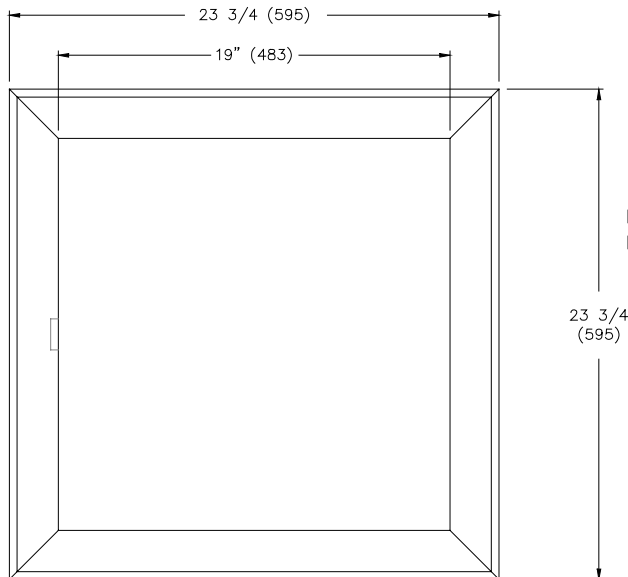

FACE VIEW


ARCHITECTURAL PLAQUE SHOWN

NOTES :


- SERIES USES A UNIQUE THERMAL ELEMENT TO CONTROL TEMPERATURE AT THE DIFFUSER. ADJUSTABLE WITH A SCREWDRIVER, UNITS REQUIRE NO ELECTRICAL OR PNEUMATIC CONNECTIONS TO ADJUST AIR FLOW BASED ON SPACE REQUIREMENTS.
- ALL TILE AND 'T' BARS ARE TO BE PROVIDED BY OTHERS.
- 8", 10", 12", OR 14" ROUND INLETS ARE AVAILABLE.
- 4-WAY BLOW PATTERN IS STANDARD. TO ALTER PATTERNS **DBTAB / 5DBTAB** ACCESSORIES ARE OFFERED SEPARATELY.
- AVDT** CONSTRUCTION IS 24 GA ELECTRO GALVANIZED STEEL.
- 5AVSDT** CONSTRUCTION IS .03 ALUMINUM.
- STANDARD FINISH IS WHITE.
- SEE FORM **DS0806** FOR SIMILAR BASIC SUPPLY SERIES ASDP / 5ASDP

**DIMENSIONS ARE SHOWN AS
 INCHES (MM)**


☐ **AVDPFF** (STL)
☐ **5AVDPFF** (AL)
 REF FR20

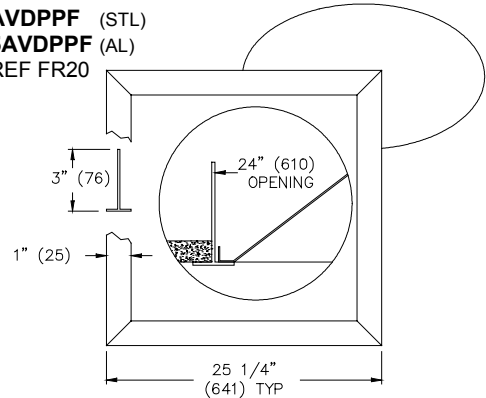

☐ **AVDPSF** (STL)
☐ **5AVDPSF** (AL)
 REF FR27

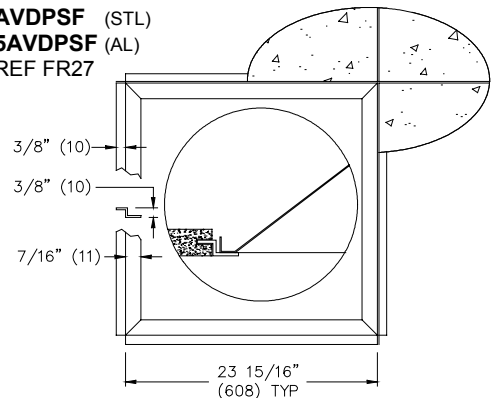

☐ **AVDPFF** (STL)
☐ **5AVDPFF** (AL)
 REF FR98

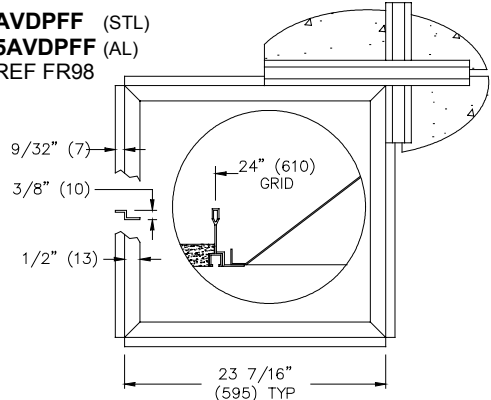

**OPTIONAL ADAPTER FRAME DETAILS
 TO BE ORDERED SEPARATELY - NTS**