


JOB NAME _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 LOCATION _____

SUBMITTAL SHEET
 Form Number DS1202.4 Effective Date 2/24
 Replaces FORM DS1202.3









SERIES 1240P

MODULAR CORE WITH INTERLOCKING EXTRUDED PERF FRAME

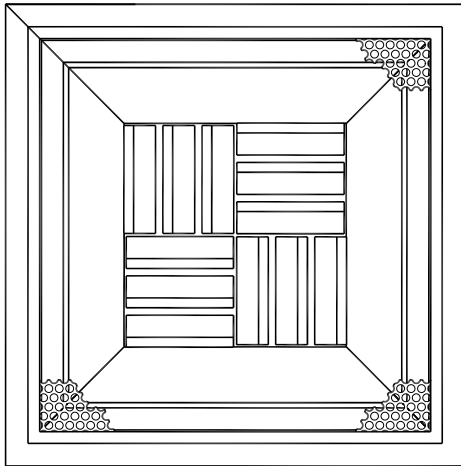

FACE VIEW FR 23 IS SHOWN ABOVE
 SEE SPECIFIC FRAME STYLE FOR ALL DIMENSIONAL DETAILS

DIMENSIONS ARE GIVEN
 AS INCHES (MM)

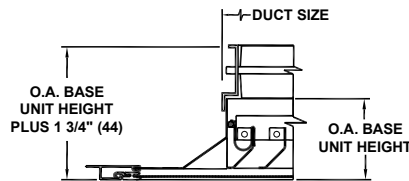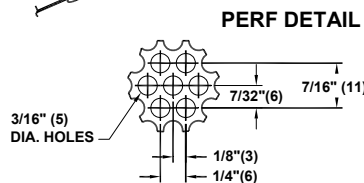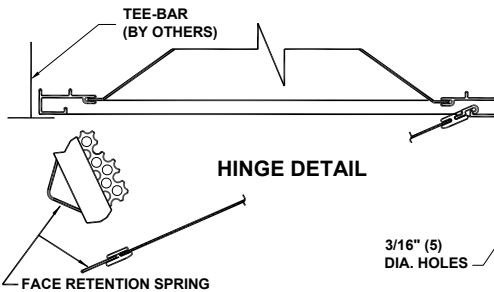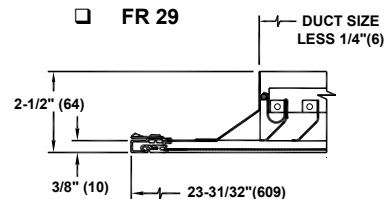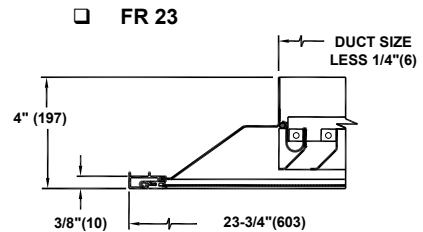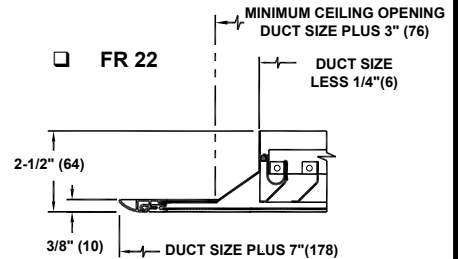

OBD1240 DETAIL
 TYPICAL OF ALL FRAME STYLES
 FR 30 SHOWN

NOTES :

- CONSTRUCTION IS STEEL WITH EXTRUDED ALUMINUM FRAMES.
- FOUR SNAP IN CORES FIELD ADJUST TO PROVIDE 1, 2, 3, OR 4 WAY PATTERNS.
- STANDARD FINISH IS 44 WHITE

ACCESSORIES :

- ☐ OBD1240 – STEEL OPPOSED BLADE DAMPER
- ☐ 5OBD1240 – ALUMINUM OPPOSED BLADE DAMPER

INLET	FRAME STYLES		
	FR 22	FR 23	FR 29
06x06 (152x152)	X	X	X
08x08 (203x203)	X	X	X
10x10 (254x254)	X	X	X
12x12 (305x305)	X	X	X
14x14 (356x356)	X	X	X
16x16 (406x406)	X	X	X
18x18 (457x457)	X	X	X
20x20 (508x508)	X	NA	NA