


JOB NAME _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 LOCATION _____

SUBMITTAL SHEET
 Form Number GS3103.3 Effective Date 4/18
 REPLACES GS3103.2



RM4, 5RM4 - ROUND CEILING DIFFUSER with Three-Position Horizontal to Vertical Core and Anti-smudge Ring

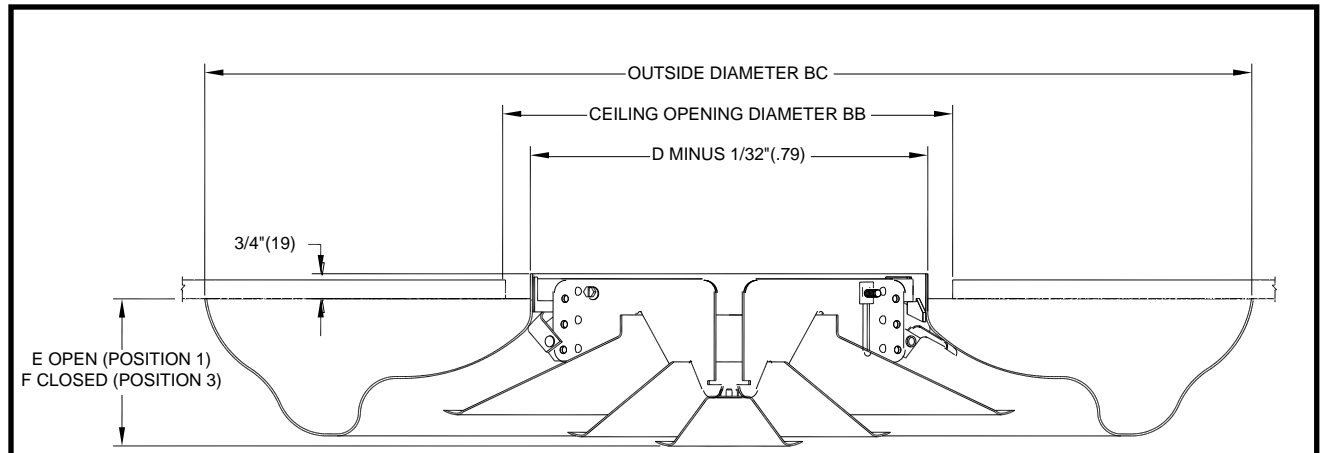

RM4 Nominal Duct Size D	5RM4 Nominal Duct Size D	E	F	Ceiling Opening BB	Outer Cone BC
6	6	3-1/16 (78)	2-5/16 (59)	7 (178)	17-3/4 (441)
8	8	3-15/16 (100)	3 (76)	9 (229)	23-1/4 (591)
10	10	4-7/8 (124)	3-3/4 (95)	11 (279)	29 (737)
12	12	5-15/16 (151)	4-1/2 (114)	13 (330)	34-7/8 (886)
14	14	6-7/8 (175)	4-15/16 (125)	15 (381)	40-5/8 (1032)
16	16	7-9/16 (192)	5-9/16 (141)	17 (432)	46-3/8 (1178)
18	18	8-5/8 (219)	6-3/8 (162)	19 (483)	51-3/8 (1305)
20	---	9-1/2 (241)	7 (178)	21 (533)	56-1/4 (1429)
24	---	11-3/8 (289)	8-3/8 (213)	25 (635)	67-1/2 (1715)

NOTES:

- 360 degree discharge pattern.
- Three position adjustable core.
- RM4 Series – All steel construction
- 5RM4 Series – All aluminum construction
- Sizes 20 through 24 are not available in aluminum.
- Standard finish is 44 white.
- Dimensions are in inches
- Dimensions in parenthesis are in mm.
- Requires hard duct or framing to mount.

DAMPER

- PR10
- PRD10
- PR12
- PRN100

ACCESSORIES:

- Safety Chain
- Round Straightening Grid

