


JOB NAME _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 LOCATION _____

SUBMITTAL SHEET
 Form Number GS0009.4 Effective Date 3/16
 Replaces Form GS0009.3




S580P SERIES
Perforated Return

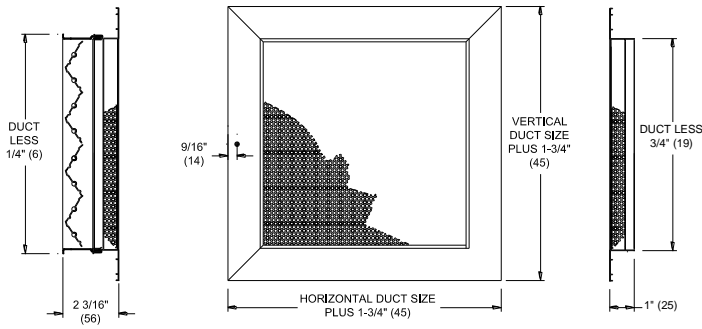

S580P
FR 22 w/OBD

S580P FRAME 22 - FACE VIEW


S580P
FR 22

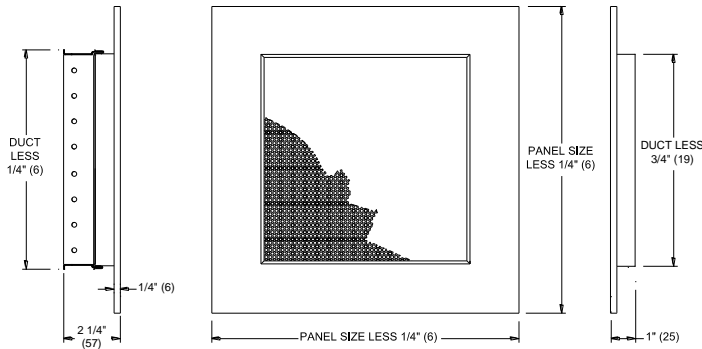

S580P
FR 23 w/OBD

S580P FRAME 23 - FACE VIEW

S580P
FR 23

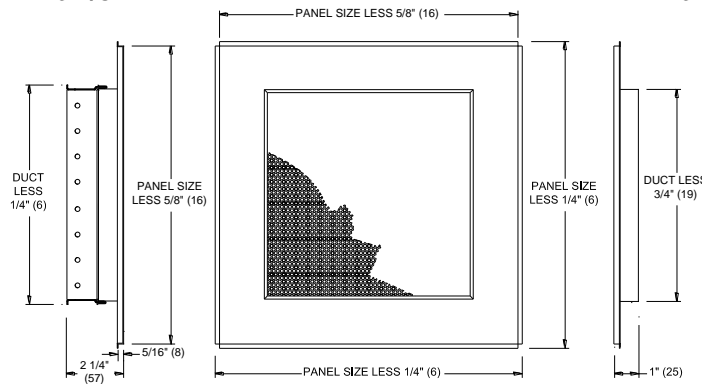


S580P
FR 98 w/OBD

S580P FRAME 98 - FACE VIEW

S580P
FR 98

**DIMENSIONS ARE SHOWN AS
 INCHES (MM)**


PERF DETAIL




BASIC FASTENING METHODS

- NO SCREW HOLES
- STANDARD SCREW HOLES

FILTER FRAME STYLES & FASTENINGS

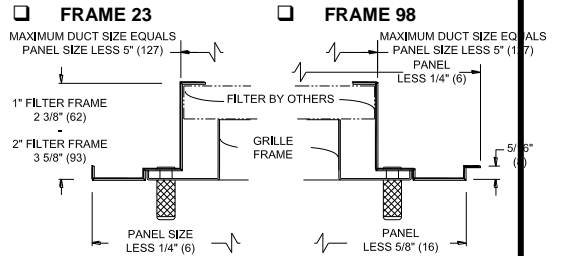

- KNURLED / HINGE TOP
- KNURLED / HINGE BOTTOM
- KNURLED / HINGE RIGHT
- KNURLED / HINGE LEFT
- KNURLED / NO HINGE

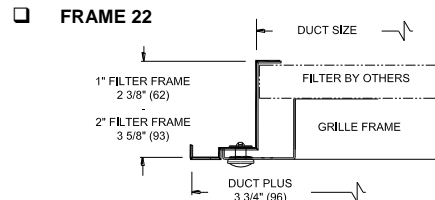

- 1/4 TURN / HINGE TOP
- 1/4 TURN / HINGE BOTTOM
- 1/4 TURN / HINGE RIGHT
- 1/4 TURN / HINGE LEFT
- 1/4 TURN / NO HINGE

NOTES :

S580P CONSTRUCTION IS ALL ALUMINUM.
 STANDARD FINISH IS 44 BRITISH WHITE.

OPTIONAL ACCESSORIES :

- OBD (22 GA) STEEL OPPOSED BLADE DAMPER
- POBD (22 GA) STEEL OPPOSED BLADE DAMPER
- PAINTED FINISH
- 5OBD ALUMINUM OPPOSED BLADE DAMPER
- PLASTER FRAME
- 1\"/>