


JOB NAME _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 LOCATION _____


1330 SERIES

Steel Supply Stationary Blade

Minimum Security

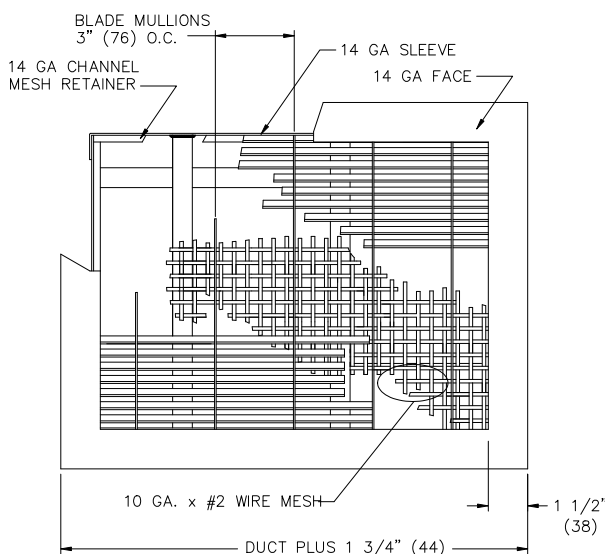

FACE VIEW

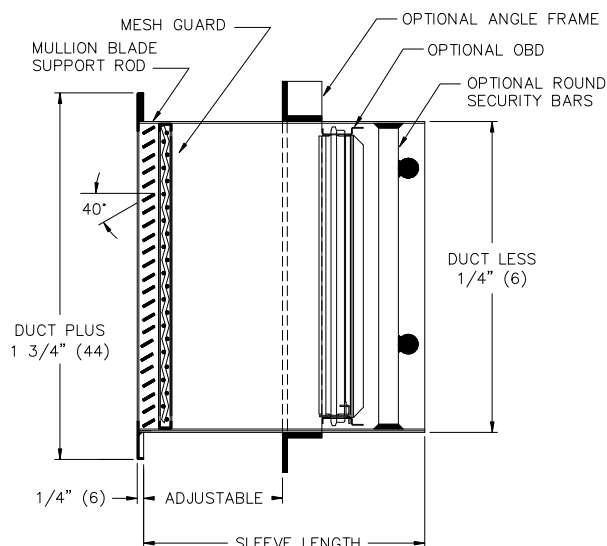

CROSS SECTION

STANDARD FEATURES :

- BASIC UNIT :** 14 ga. steel face plate, 14 ga. blades reinforced by 14 ga. mullions on 3" (76) centers.
- SLEEVE :** 14 ga. steel, wrap around corner construction stitch welded seams.
- MESH :** 10 ga. #2 mesh screen retained by a 14 ga. channel.
- All welded construction
- FINISH :** 44 British white
- SIZES** available in 2" (51) increments only *
 DUCT MIN 6" (152) x 4" (102)
 MAX 30" (762) x 30" (762)
 *only odd size available is 9" x 9" (229 x 229)
- SLEEVE LENGTH :** Available in the following lengths only.
 6" (152) 8" (203) 10" (254)
 12" (305) 14" (356) 16" (406)
 18" (457)

OPTIONS :

see FORM SG7050 for dimensional details

- ☐ Rear operated **OPPOSED BLADE DAMPER** is tack welded to the sleeve.
- ☐ 3/4" (19) DIA **SECURITY BAR** grid is tack welded twice at each intersection and welded completely around at the sleeve joint.
- ☐ **ANGLE FRAME**, 1 1/2" x 1 1/2" x 3/16" (38x38x5) welded at corners, ships unpainted and loose for field installation.
- ☐ **ANCHOR BARS** 3/4" (19) dia. x 3" (76) long are welded around at the sleeve joint (not shown here see FORM SG7050)

RECOMMENDED OPENING = DUCT SIZE + 1/2"

DIMENSIONS ARE GIVEN AS INCHES (MM).