


JOB NAME _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 LOCATION _____

SUBMITTALSHEET
 Form Number SG7017.3 Effective Date 10/12
 Replaces FORM 7017.2



1320 SERIES
Steel Supply or Return Grille

Square Perf Pattern

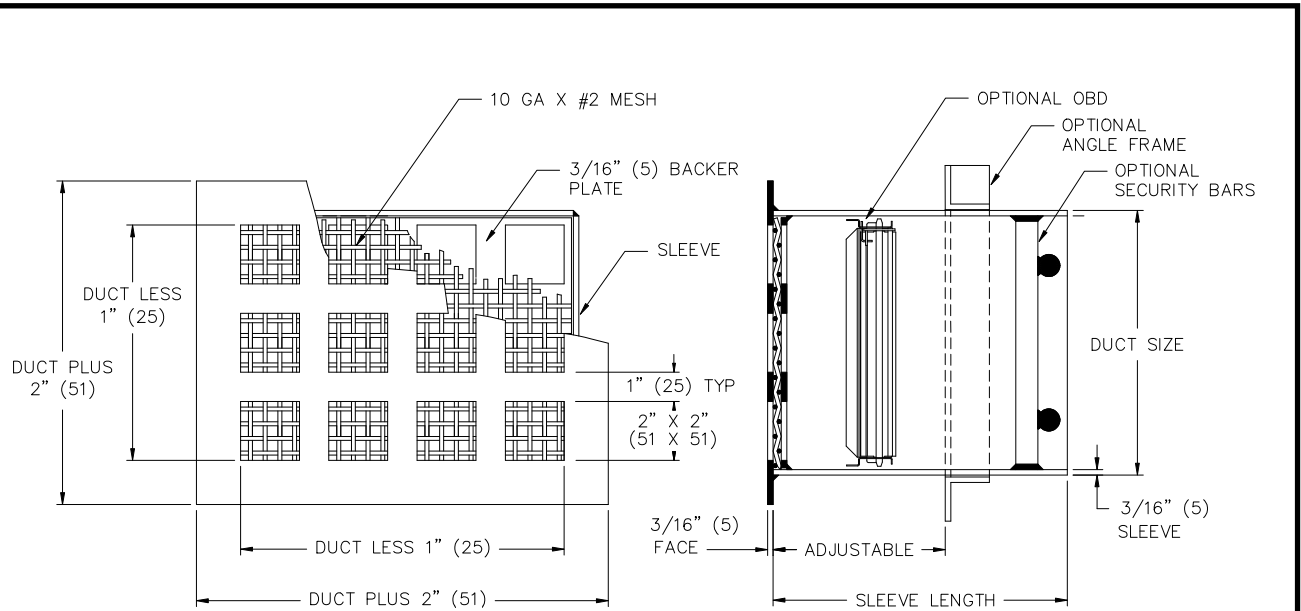

FACE VIEW

CROSS SECTION

STANDARD FEATURES :

1. **FACE PLATE :** 3/16" (5) steel with 2 x 2 (51 x 51) square holes with 1" (25) frets
2. **BACKER PLATE :** 3/16" (5) steel with 2 x 2 (51 x 51) square holes with 1" (25) frets
3. **SLEEVE :** 3/16 (5) stitch welded seams
4. **MESH :** 10 ga. 2 mesh welded between the face plate and backer
5. All welded construction
6. **FINISH :** 44 British white
7. **SIZES** available in 2" (51) increments only *

DUCT MIN 6" (152) x 4" (102)
MAX 30" (762) x 30" (762)
 *only odd size available is 9 x 9 (229 x 229)

8. **SLEEVE LENGTH :** Available in the following lengths only.

6" (152)	8" (203)	10" (254)
12" (305)	14"(356)	16"(406)
18" (457)		

OPTIONS : SEE FORM SG7050 FOR DIMENSIONAL DETAILS

- Front or rear operated **OPPOSED BLADE DAMPER** is welded in sleeve.
- 3/4" (19) DIA **SECURITY BAR** grid is tack welded twice at each intersection and welded completely around at the sleeve joint.
- ANGLE FRAME**, 1 1/2 x 1 1/2x 3/16 (38x38x5) welded at corners, ships unpainted and loose for field installation.
- ANCHOR BARS** 3/4 (19) dia. x 3 (76) long are welded around at the sleeve joint (not shown here see FORM SG7050)

RECOMMENDED OPENING = DUCT SIZE + 1/2"

DIMENSIONS ARE GIVEN AS INCHES (MM).