


OB NAME _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 LOCATION _____

SUBMITTALSHEET
 Form Number SG7034.1 Effective Date 5/13
 SG7034




**51380P / 51380L Minimum Security Series
 Aluminum Supply / Return Grille Round / Square Perf Pattern**

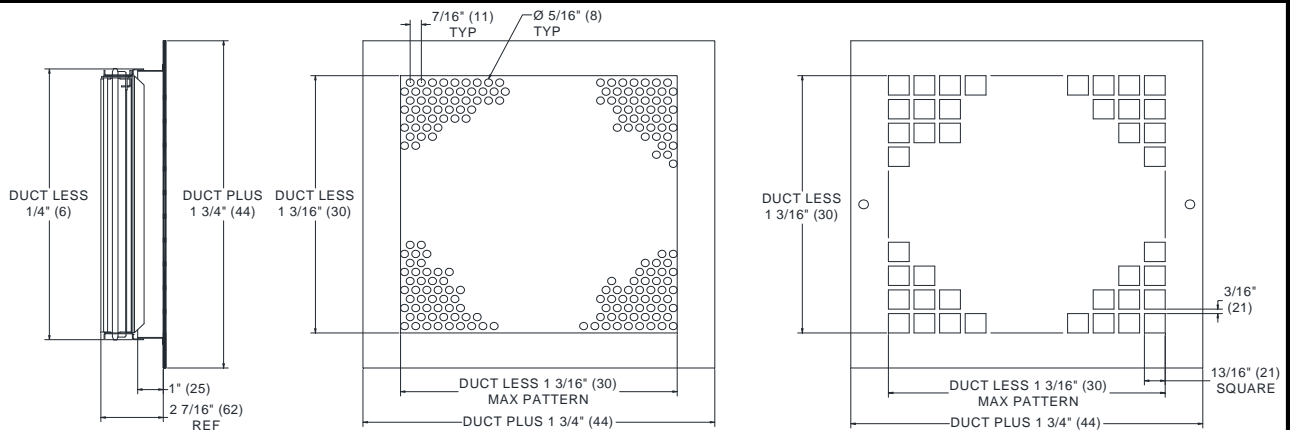


51380-P
 SHOWN WITH OBD OPTION

51380-L

**COUNTER SUNK
 SCREW HOLE
 OPTION**

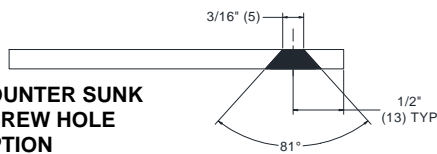

**STRAIGHT SCREW
 HOLE OPTION**



STANDARD FEATURES :

1. **51380-P FACE PLATE :** 1/8" (3) aluminum with 5/16" (8) round holes on 7/16" (11) staggered centers.
2. **51380-L FACE PLATE :** 1/8" (3) aluminum with 13/16" x 13/16" (21 x 21) square holes with 3/16" (5) frets.
3. **FINISH :** 44 British white
4. **SIZES** available in 2" (51) increments only.*
 DUCT MIN 6" (152) x 4" (102)
 MAX 30" (762) x 30" (762)

OPTIONS : See screw hole chart for option details

- 3/16" (5) dia. straight screw holes.
- 3/16" (5) dia. counter sunk holes.
- Front operated opposed blade damper is attached to the unit with 's clips'.
- .025 (.6) thick aluminum plaster frame
- 8PF plaster frame, see 8PF submittal

DIMENSIONS ARE AS INCHES (MM).