


JOB NAME \_\_\_\_\_  
 ARCHITECT \_\_\_\_\_  
 ENGINEER \_\_\_\_\_  
 CONTRACTOR \_\_\_\_\_  
 LOCATION \_\_\_\_\_

**SUBMITTALSHEET**  
 Form Number SG7041.6 Effective Date 02/24  
 Replaces SG7041.5



**1390F Security Series  
 Steel Round Barred Security Sleeve**

**Duct Mounted**

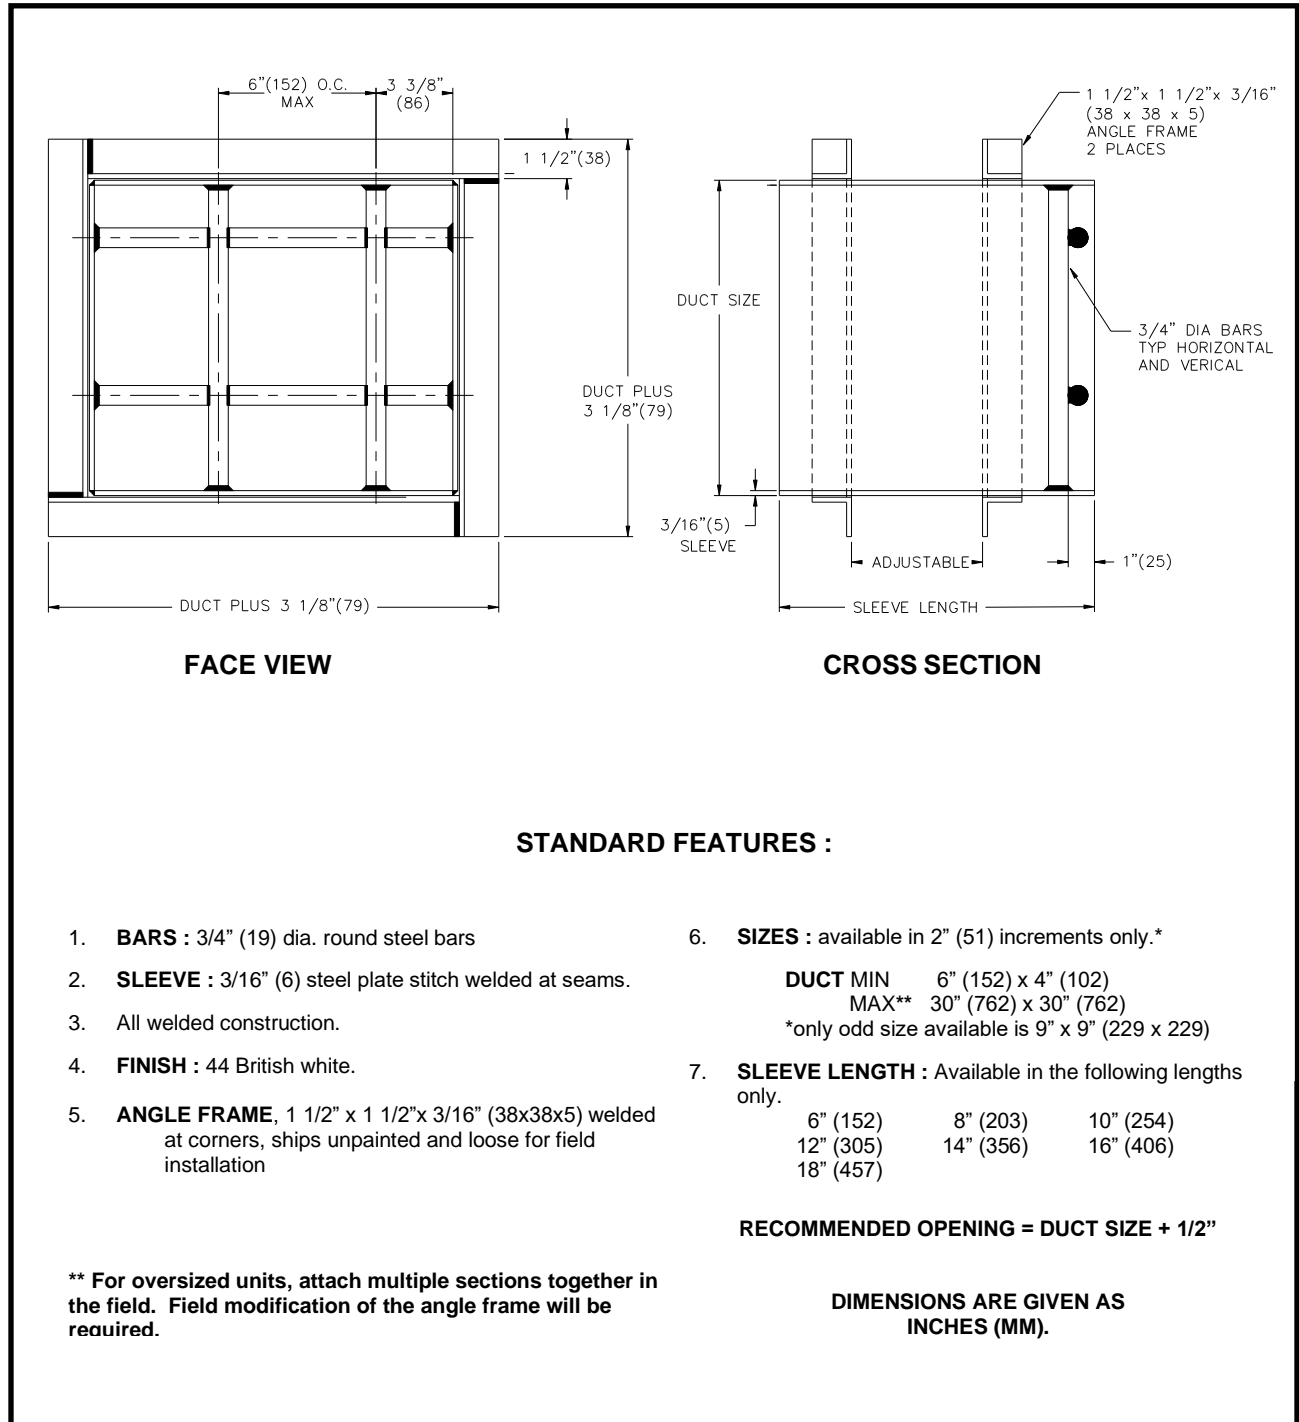

**STANDARD FEATURES :**

1. **BARS :** 3/4" (19) dia. round steel bars
2. **SLEEVE :** 3/16" (6) steel plate stitch welded at seams.
3. All welded construction.
4. **FINISH :** 44 British white.
5. **ANGLE FRAME,** 1 1/2" x 1 1/2" x 3/16" (38x38x5) welded at corners, ships unpainted and loose for field installation
6. **SIZES :** available in 2" (51) increments only.\*  
**DUCT MIN** 6" (152) x 4" (102)  
**MAX\*\*** 30" (762) x 30" (762)  
 \*only odd size available is 9" x 9" (229 x 229)
7. **SLEEVE LENGTH :** Available in the following lengths only.  
 6" (152)      8" (203)      10" (254)  
 12" (305)      14" (356)      16" (406)  
 18" (457)

**RECOMMENDED OPENING = DUCT SIZE + 1/2"**

\*\* For oversized units, attach multiple sections together in the field. Field modification of the angle frame will be required.

**DIMENSIONS ARE GIVEN AS INCHES (MM).**