



6100, 56100, 6150, 56150 (Supply) Reference Charts

AIRFLOW VS. NC LEVEL: 6100, 56100 (NO DAMPER)

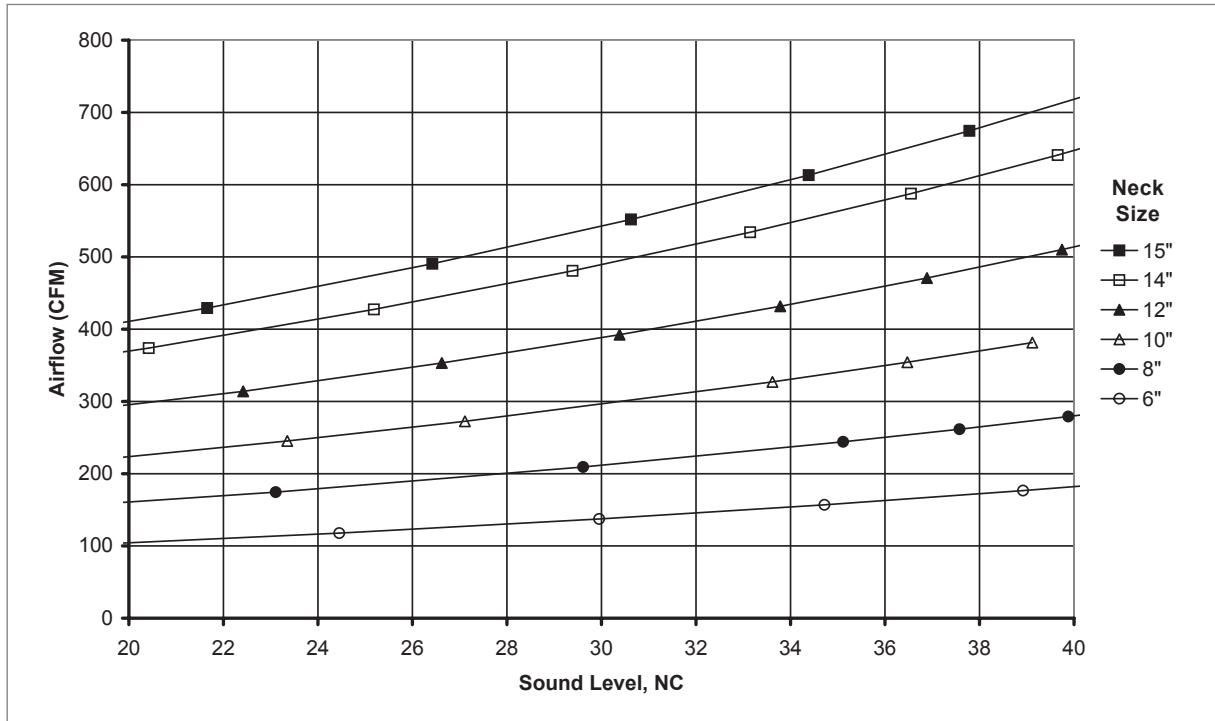

AIRFLOW VS. NC LEVEL: 6150, 56150 (NO DAMPER)

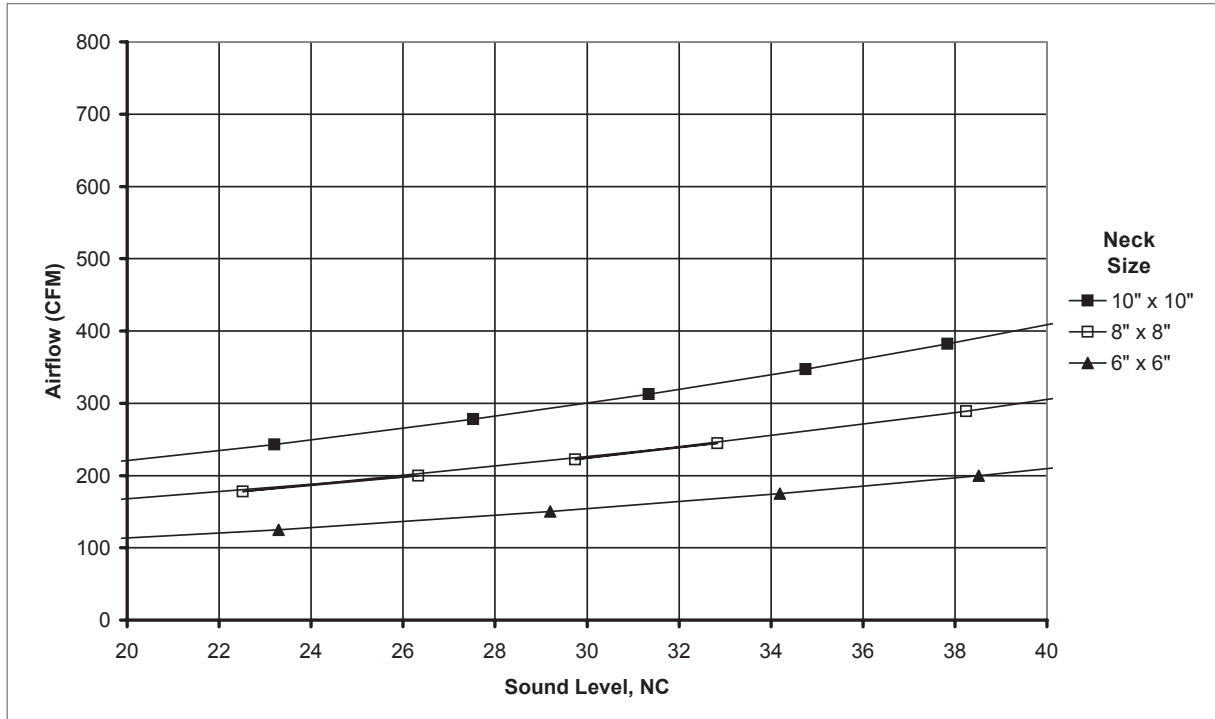


PERFORATED FACE DIFFUSERS


6100-6150

6150, 56150 (Supply) Reference Charts

SPACING FOR 80% ADPI: 6150, 56150, 6"x6" NECK, 4-WAY (NO DAMPER)

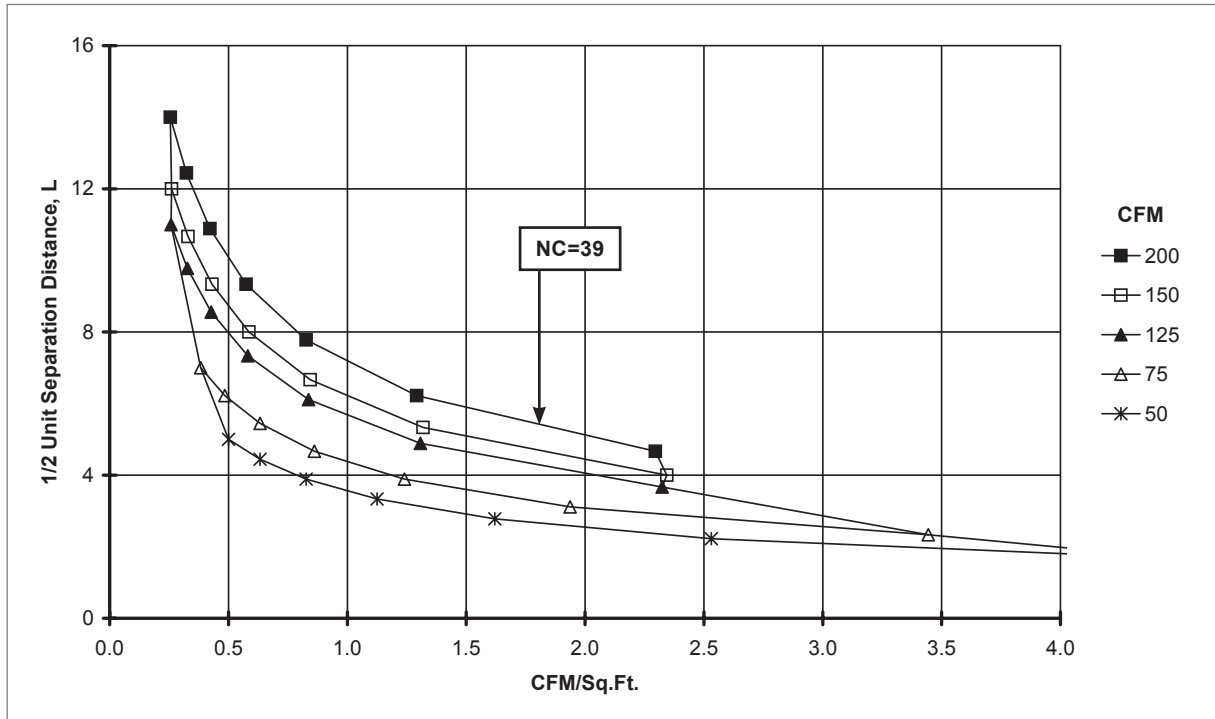

SPACING FOR 80% ADPI: 6150, 56150, 10"x10" NECK, 4-WAY (NO DAMPER)

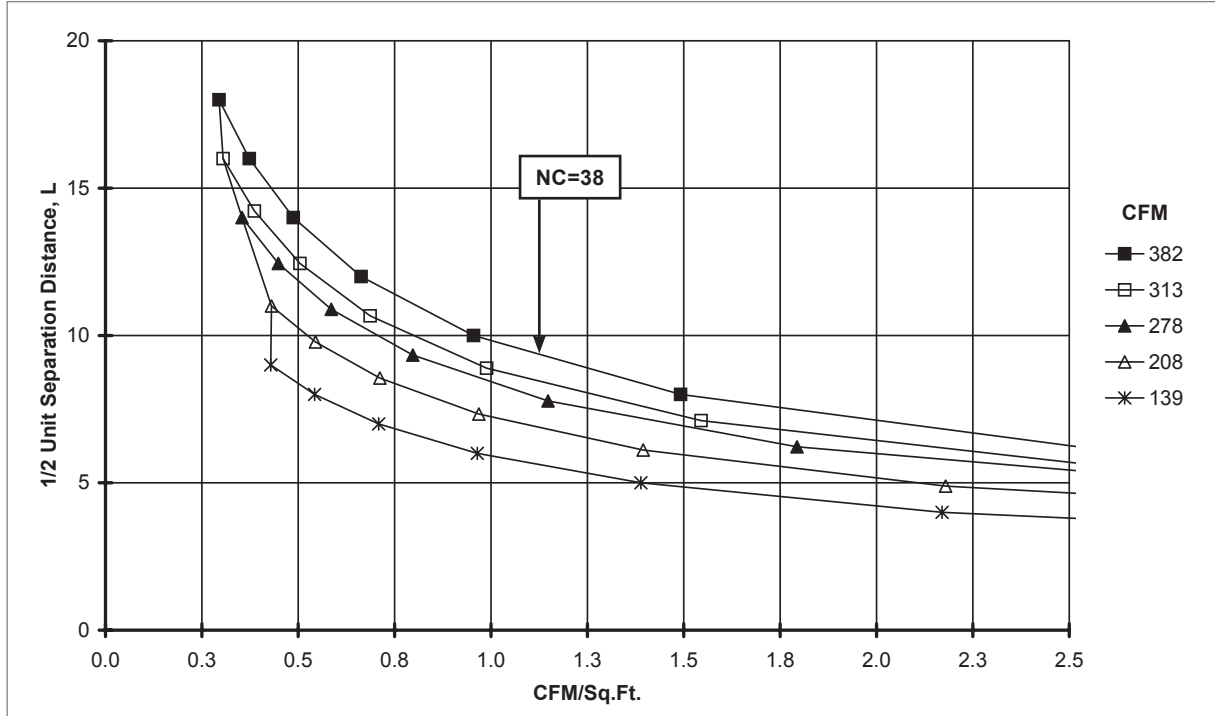

NOTES: Charts are at 20 BTUH/ft² loads. See the Engineering section of this catalog for instructions on how to read these charts and additional ADPI information.

PERFORATED FACE DIFFUSERS

6150-56150