


**6200, 56200 (Supply) Reference Charts**

**AIRFLOW VS. NC LEVEL: 6200, 56200, 24"x24" PANEL (NO DAMPER)**

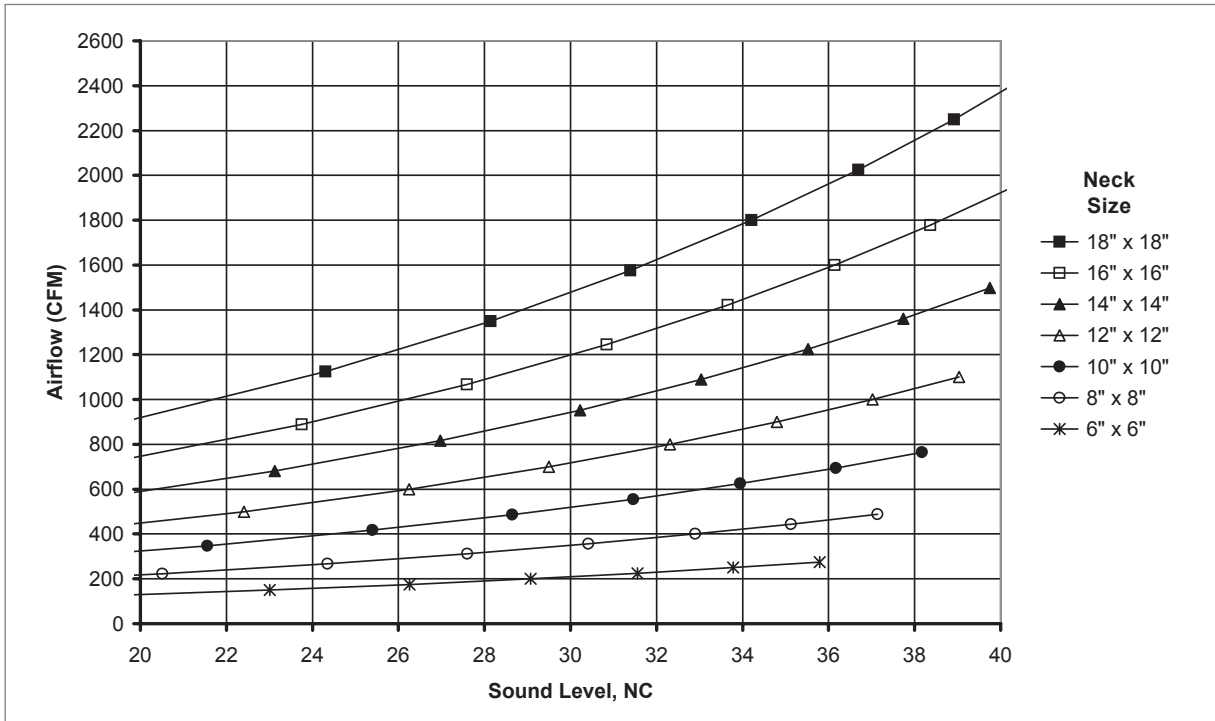


PERFORATED FACE DIFFUSERS


62000 - 56200

**6200, 56200 (Supply) Reference Charts**

**SPACING FOR 80% ADPI: 6200, 56200, 24"x24" PANEL, 8"x8" NECK, 4-WAY (NO DAMPER)**

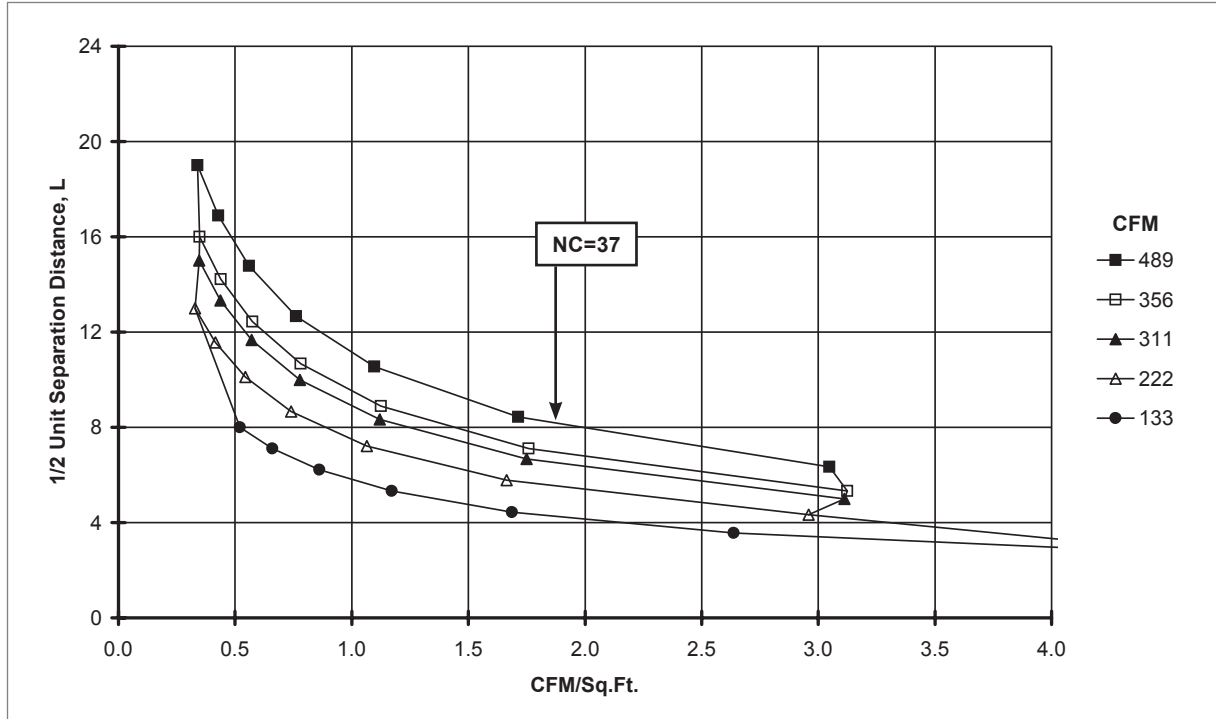

**SPACING FOR 80% ADPI: 6200, 56200, 24"x24" PANEL, 14"x14" NECK, 4-WAY (NO DAMPER)**

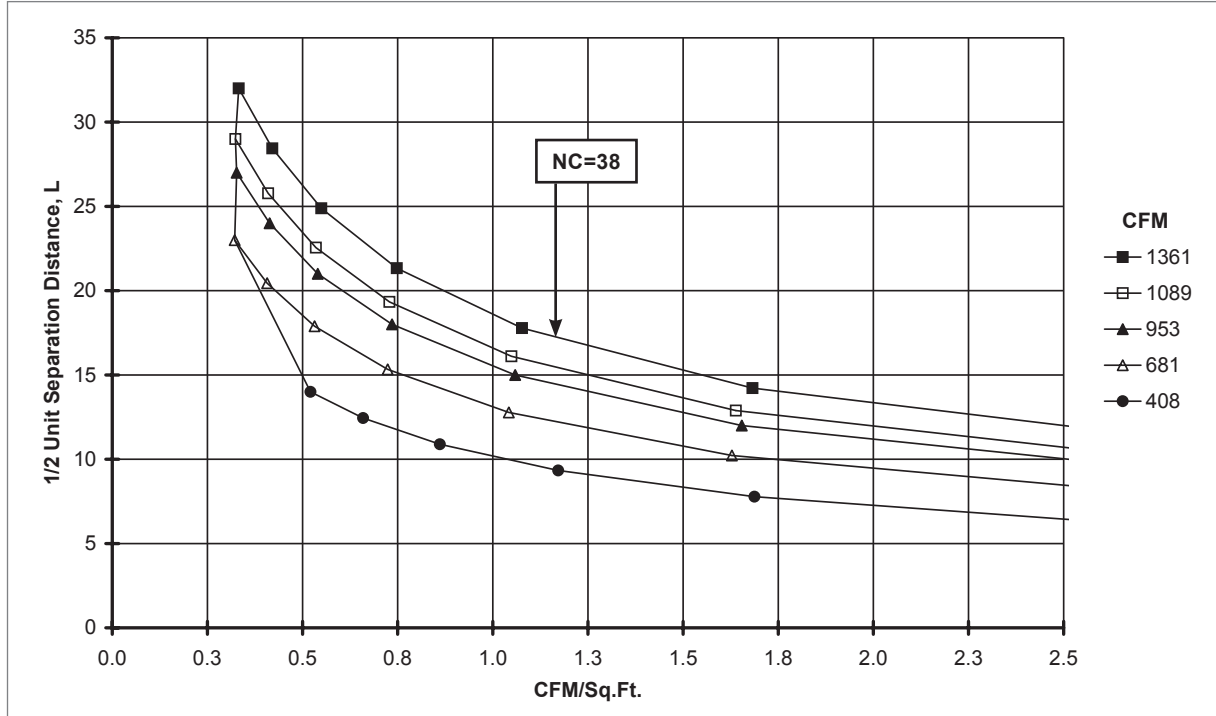

NOTES: Charts are at 20 BTUH/ft<sup>2</sup> loads. See the Engineering section of this catalog for instructions on how to read these charts and additional ADPI information.

PERFORATED FACE DIFFUSERS

62000-156200