


6200FR, 6290FR (Fire Rated Supply/Return) Dimensional Information

The 6200FR/6290FR offers the safety of fire rated performance with the proven 6200/6290 series diffuser. It is intended for use with Lay-in T-Bar application involving fire rated ceiling designs. It combines this flexibility with all of the features of the standard 6200/6290 and is available exclusively in steel.


6200FR/6290FR comes standard as a UL 263 classified assembly which incorporates a 3-hour rated fire damper and a 1/2" thick ceramic fiber blanket.




6200FR, SUPPLY FACE VIEW (24"x24" PANEL)

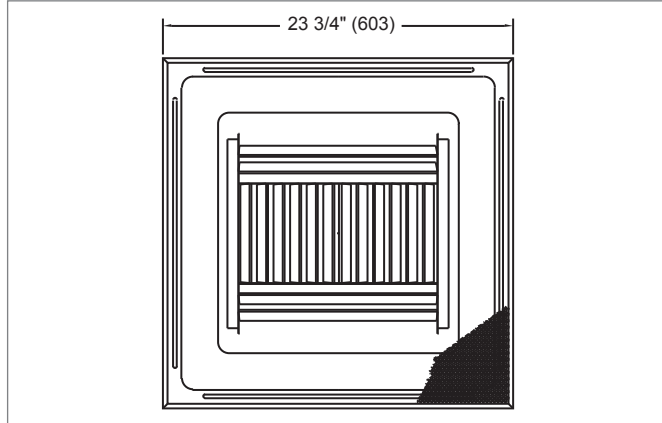


6290FR, RETURN FACE VIEW (24"x24" PANEL)

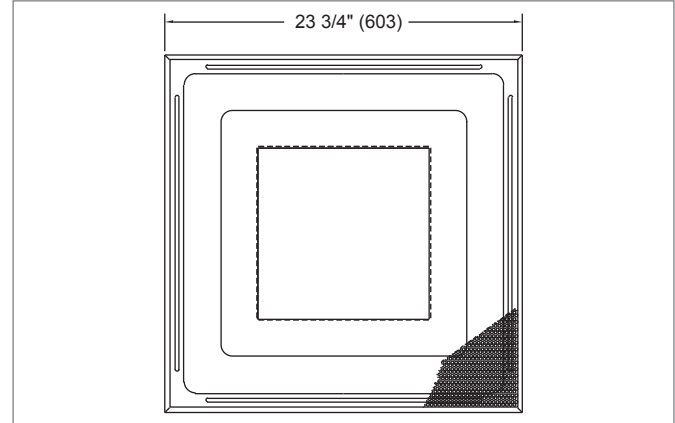


6200FR, 6290FR, CROSS SECTION

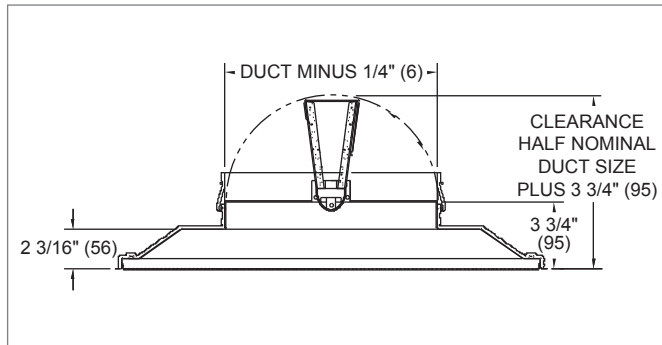


6200FR, 6290FR, HINGE DETAIL

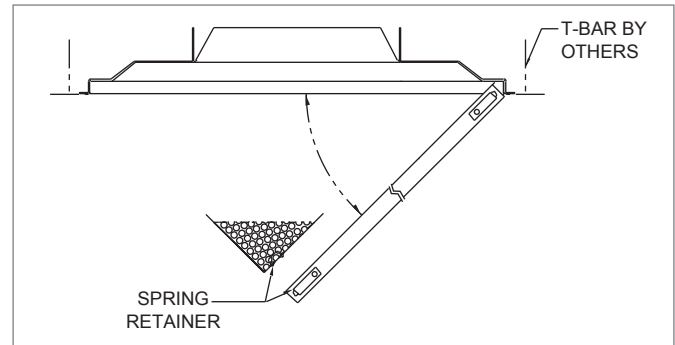

6200FR, 6290FR, FIRE BLANKET DETAIL

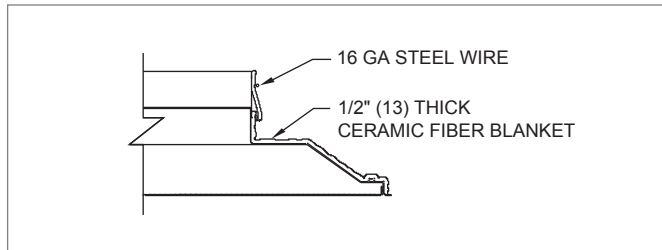

6200FR, 6290FR, PERFORATION DETAIL

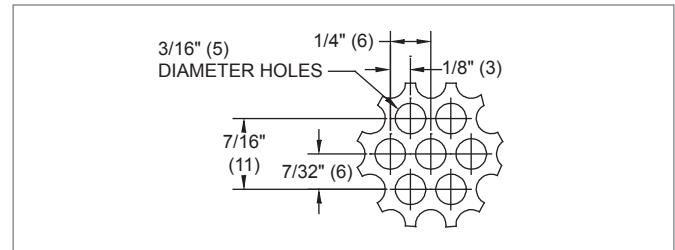

6200FR, 6290FR, AVAILABLE INLET SIZES

NOMINAL PANEL 24" x 24" (610 x 610)	INLET SIZES
	6" x 6" (152 x 152)
	8" x 8" (203 x 203)
	10" x 10" (254 x 254)
	12" x 12" (305 x 305)
	14" x 14" (356 x 356)

NOTE: Dimensions in parentheses are mm.

6200FR, DISCHARGE AIR PATTERNS

