


**6500, 56500 (Supply) Reference Charts**

**AIRFLOW VS. NC LEVEL: 6500, 56500, 24"x24" PANEL (NO DAMPER)**

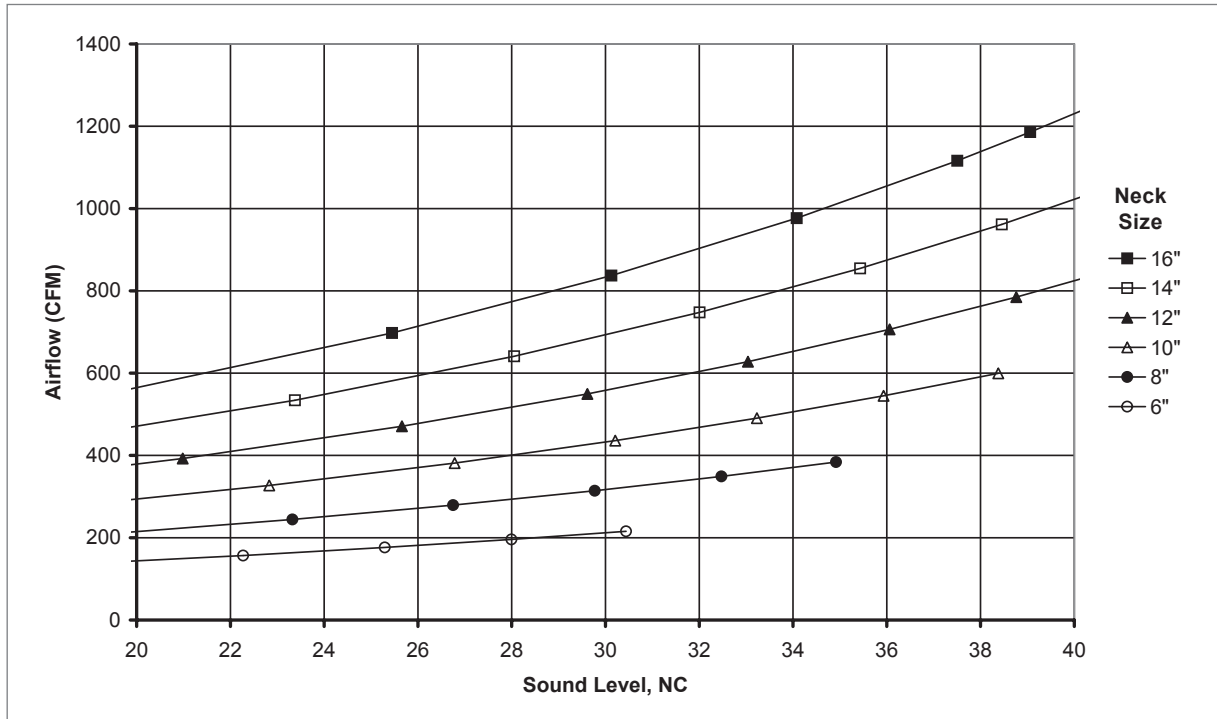


PERFORATED FACE DIFFUSERS


65000-56500

**6500, 56500 (Supply) Reference Charts**

**SPACING FOR 80% ADPI: 6500, 56500, 24"x24" PANEL, 8" NECK, 4-WAY (NO DAMPER)**

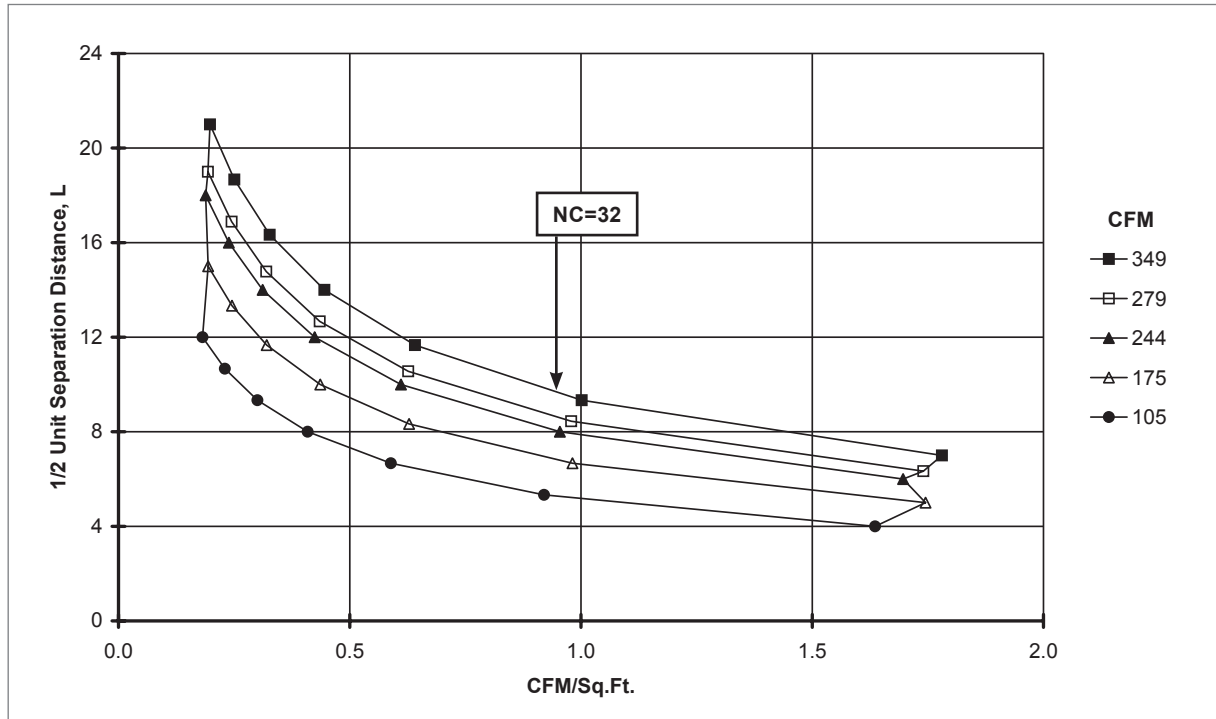

**SPACING FOR 80% ADPI: 6500, 56500, 24"x24" PANEL, 14" NECK, 4-WAY (NO DAMPER)**

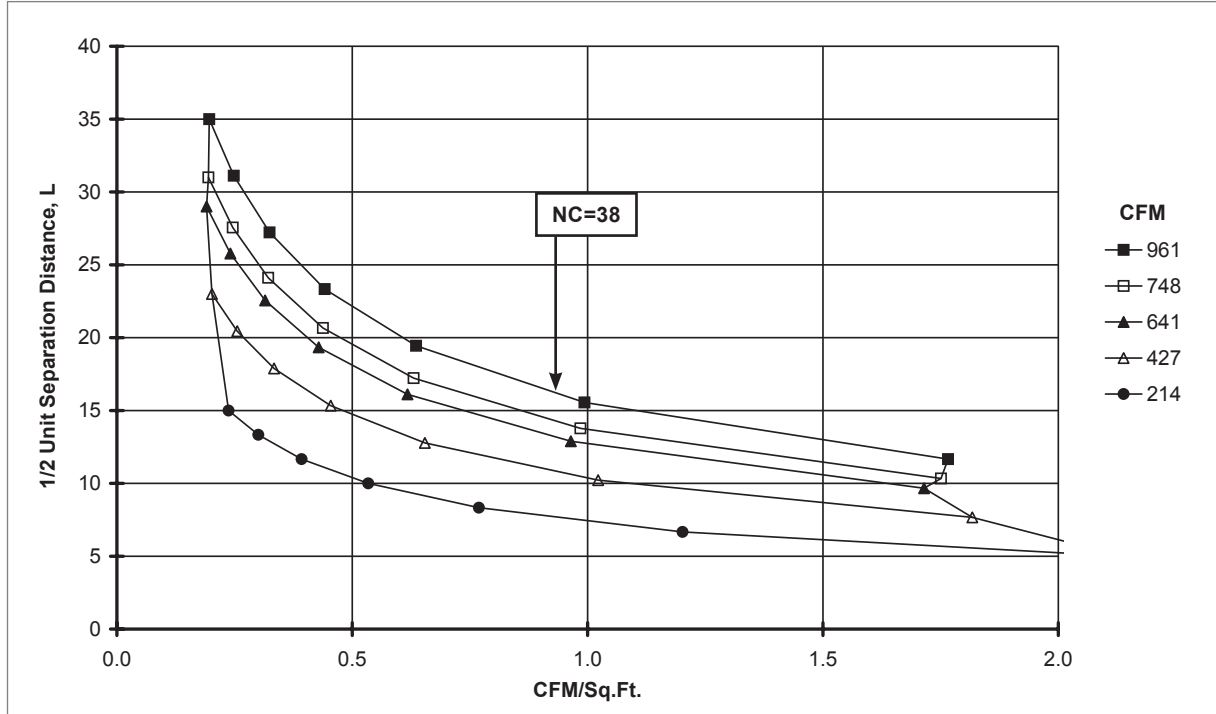

NOTES: Charts are at 20 BTUH/ft<sup>2</sup> loads. See the Engineering section of this catalog for instructions on how to read these charts and additional ADPI information.

PERFORATED FACE DIFFUSERS

65000-156500