



6400, 56400, 6490, 56490 (Supply/Return) Reference Charts

AIRFLOW VS. NC LEVEL: 6400, 56400, 24"x24" PANEL (NO DAMPER)


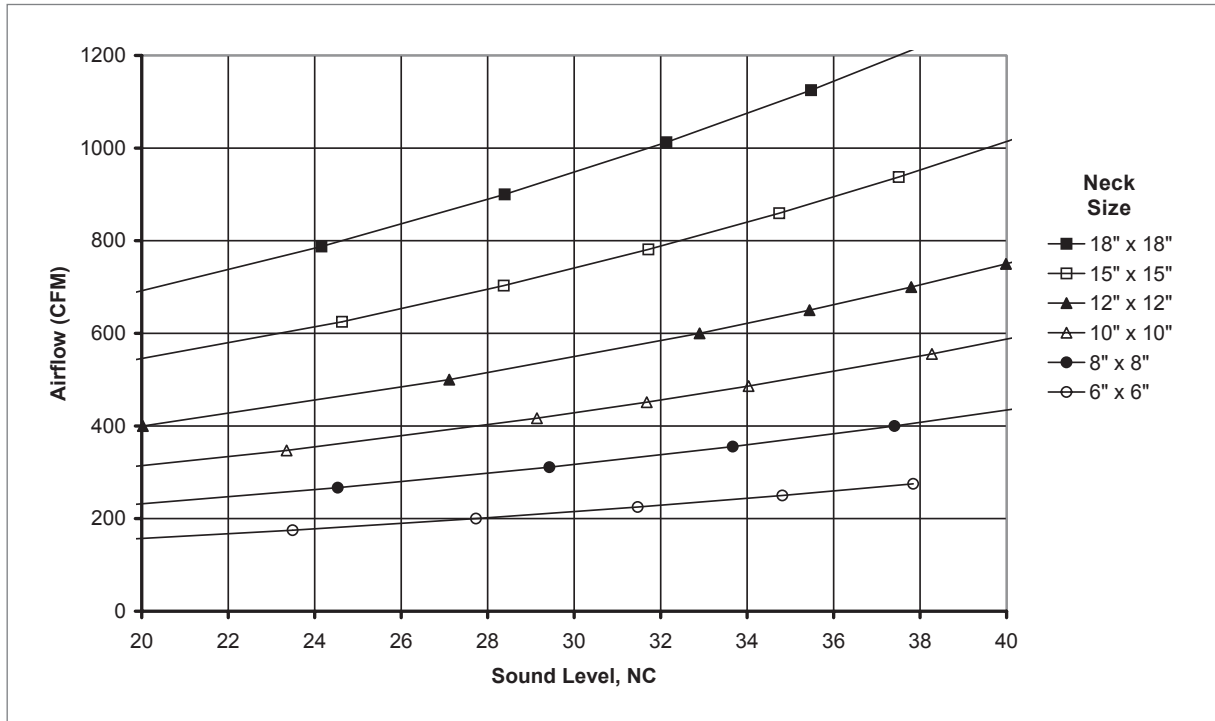


AIRFLOW VS. NC LEVEL: 6490, 56490, 24"x24" PANEL (NO DAMPER)

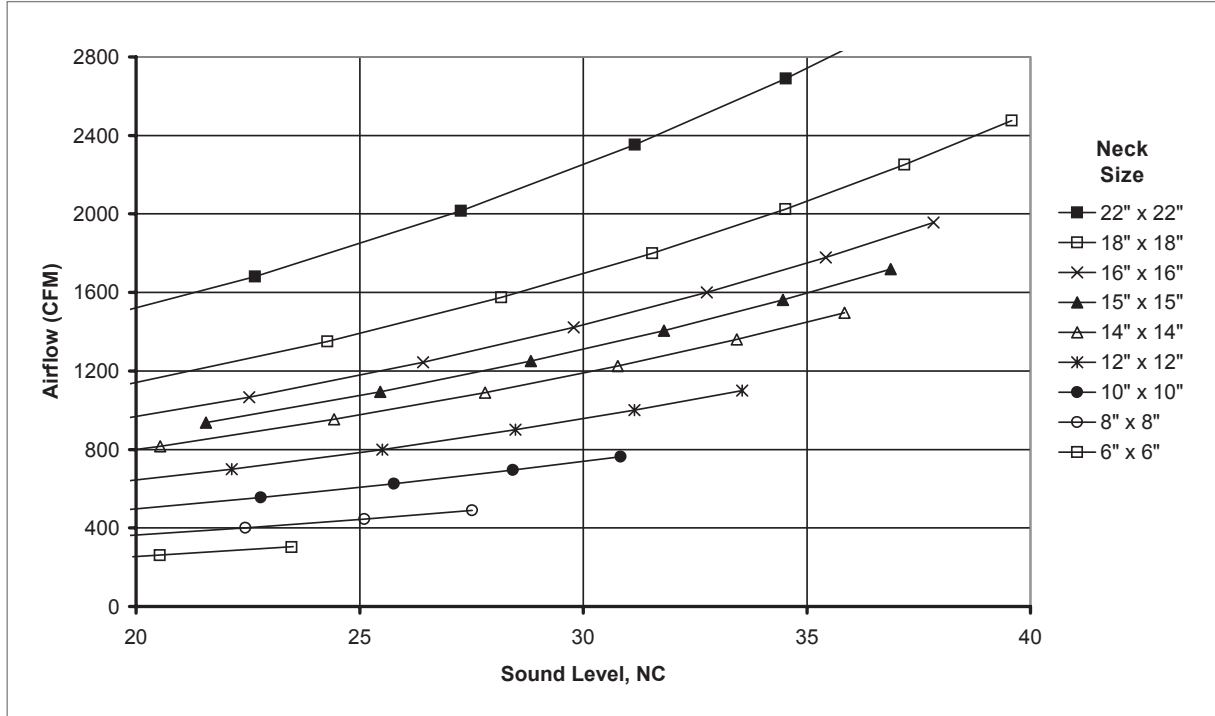

PERFORATED FACE DIFFUSERS

6400 - 56400

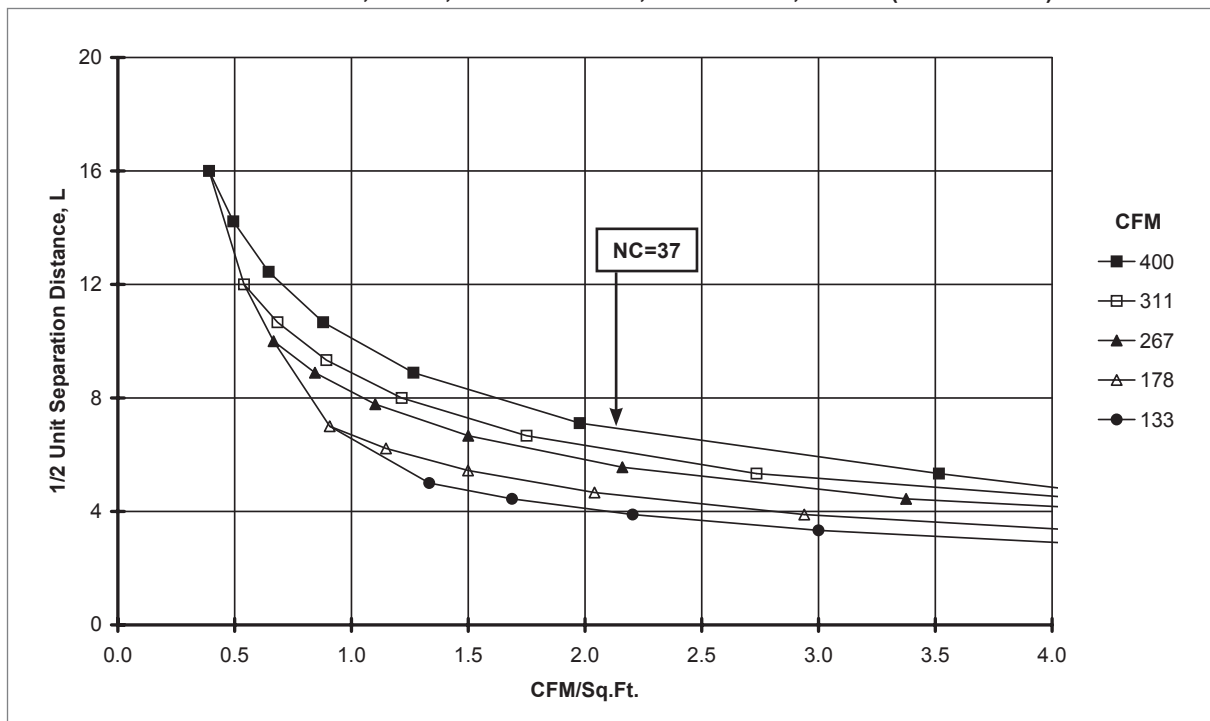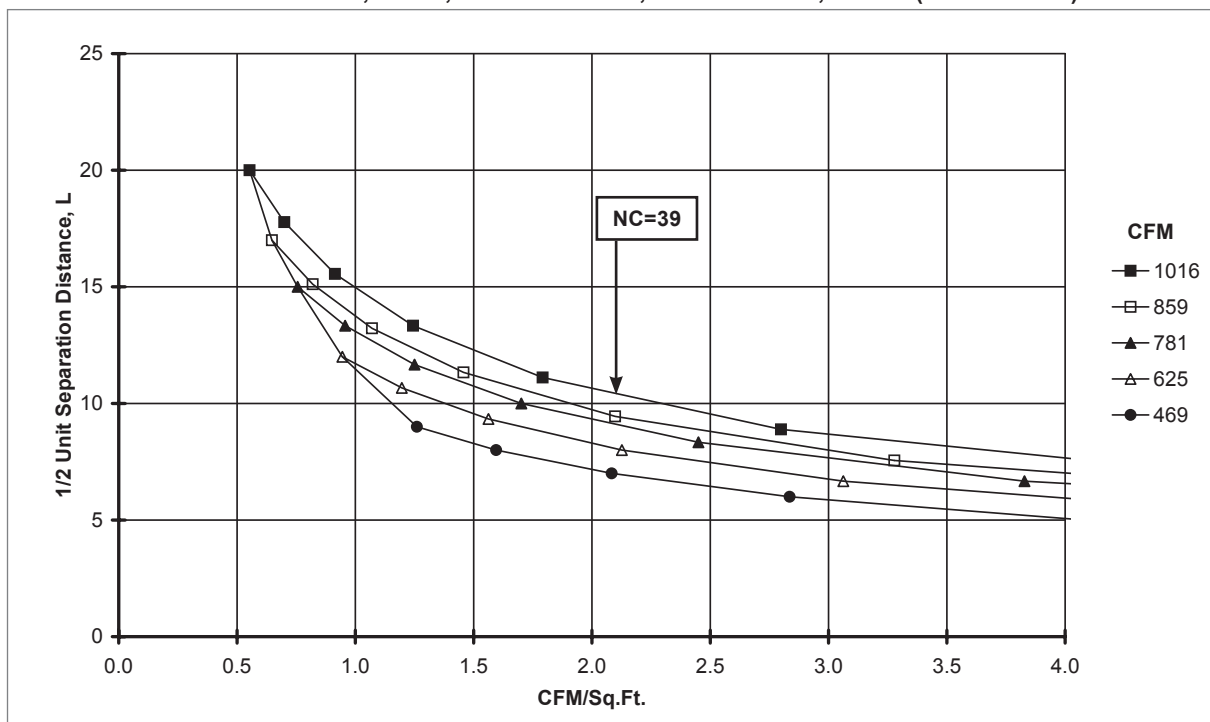6400, 56400 (Supply) Reference Charts
SPACING FOR 80% ADPI: 6400, 56400, 24"x24" PANEL, 8"x8" NECK, 4-WAY (NO DAMPER)

SPACING FOR 80% ADPI: 6400, 56400, 24"x24" PANEL, 15"x15" NECK, 4-WAY (NO DAMPER)


NOTES: Charts are at 20 BTUH/ft² loads. See the Engineering section of this catalog for instructions on how to read these charts and additional ADPI information.