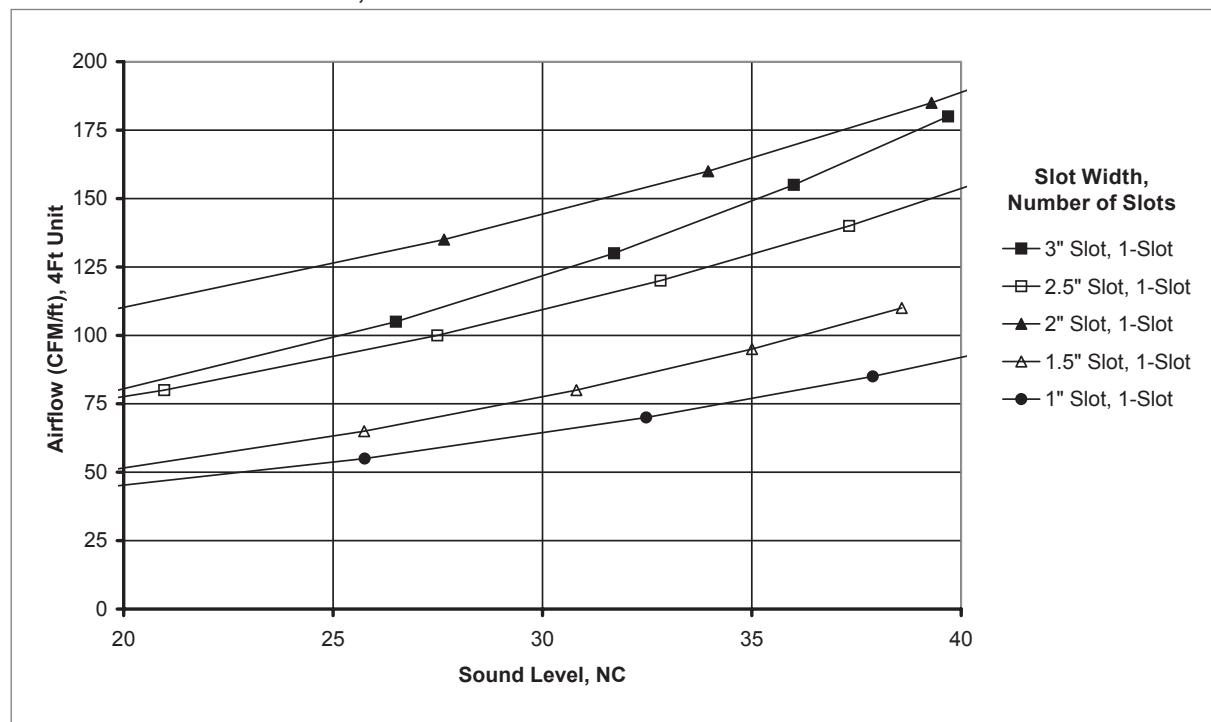
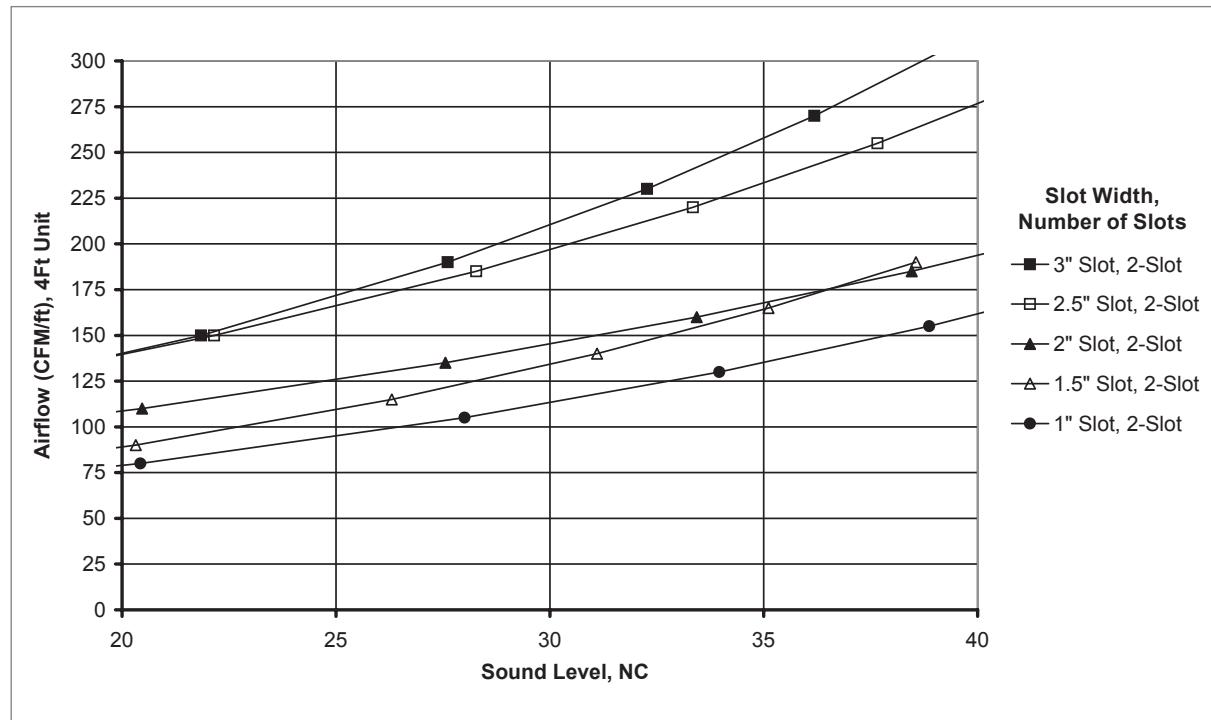
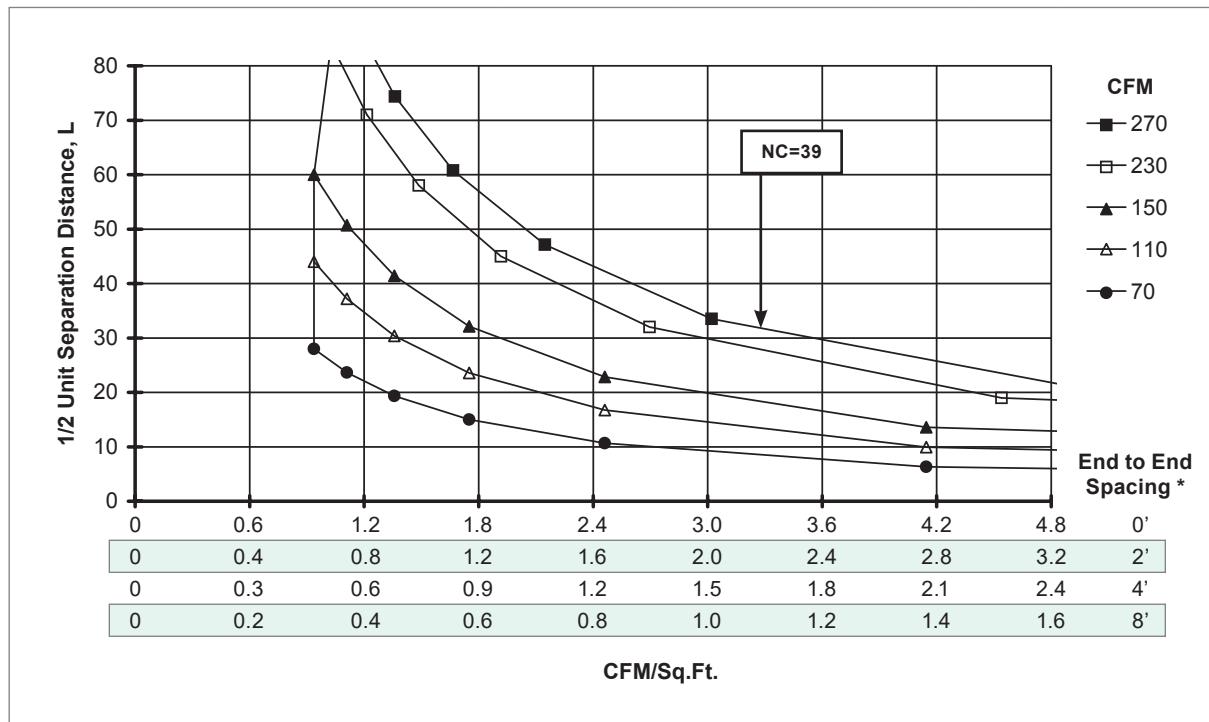
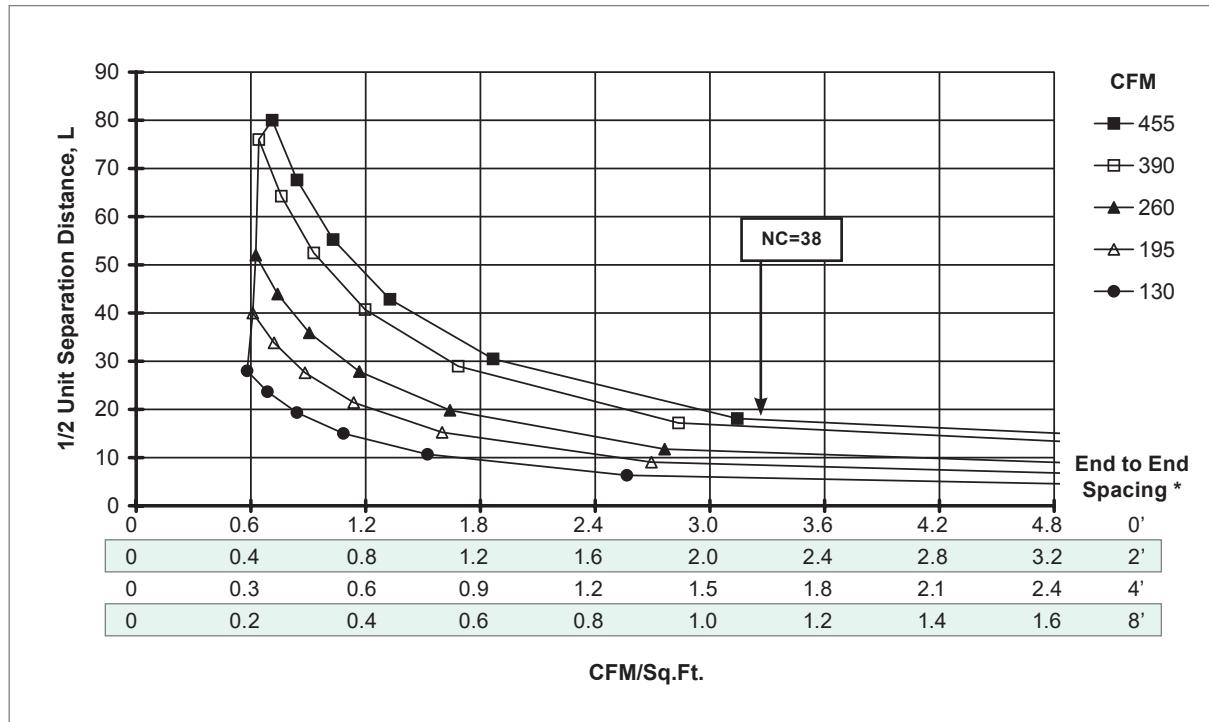


DFL Reference Charts: Horizontal Throw
AIRFLOW VS. NC LEVEL: DFL, 1-SLOT

AIRFLOW VS. NC LEVEL: DFL, 2-SLOT


DFL Reference Charts: For Lay-In T-Bar (DFB) & Narrow-T (DFNT), Horizontal Throw =
DIFFUSER SPACING FOR 80% ADPI: DFB/DFNT, 4 FT. LENGTH, 1" SLOT WIDTH, 1-SLOT, 1-WAY, 8" INLET PLENUM

DIFFUSER SPACING FOR 80% ADPI: DFB/DFNT, 4 FT. LENGTH, 1" SLOT WIDTH, 2-SLOT, 2-WAY, 8" INLET PLENUM

NOTES: Charts are at 20 BTUH/ft² loads.
See the Engineering section of this catalog for instructions on how to read these charts and additional ADPI information.
** Separation distance in feet between active supply sections discharging in similar directions.*


E1 LINEAR SLOT DIFFUSERS

DesignFlo® | Architectural Linear Slot Diffuser




DFL Reference Charts: For Lay-In T-Bar (DFB) & Narrow-T (DFNT), Horizontal Throw =

DIFFUSER SPACING FOR 80% ADPI: DFB/DFNT, 4 FT. LENGTH, 2" SLOT WIDTH, 1-SLOT, 1-WAY, 8" INLET PLENUM

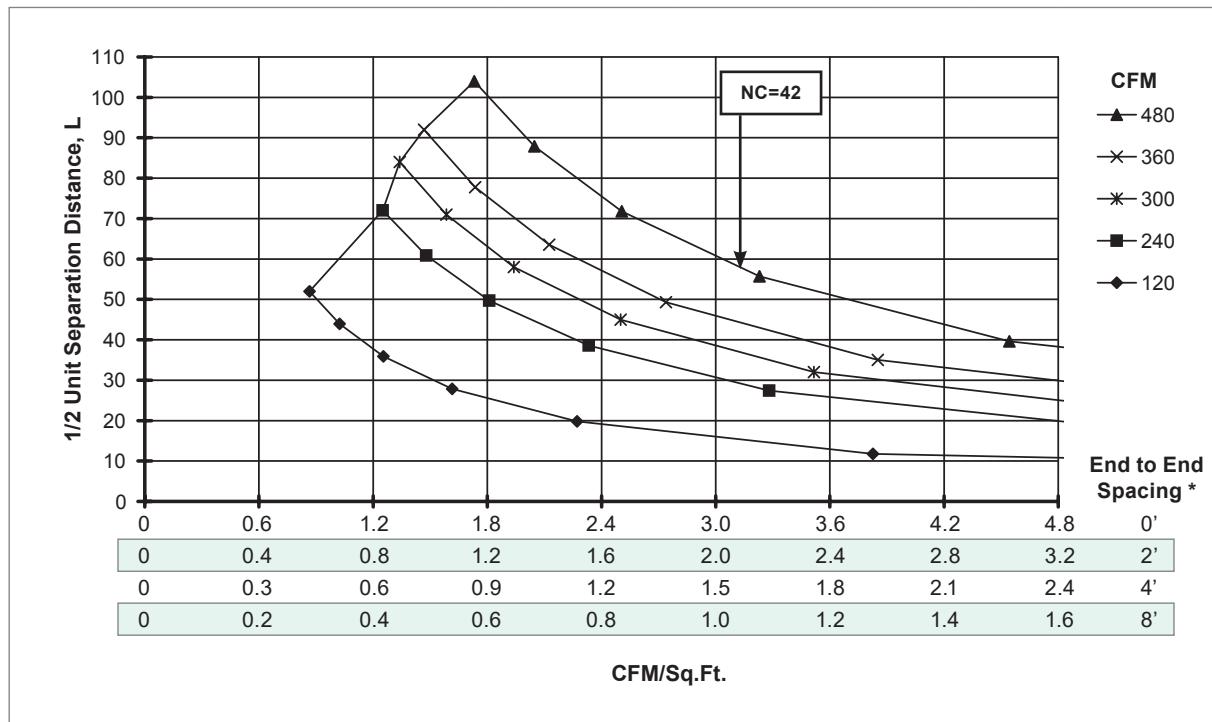

DIFFUSER SPACING FOR 80% ADPI: DFB/DFNT, 4 FT. LENGTH, 2" SLOT WIDTH, 2-SLOT, 2-WAY, 10" INLET PLENUM

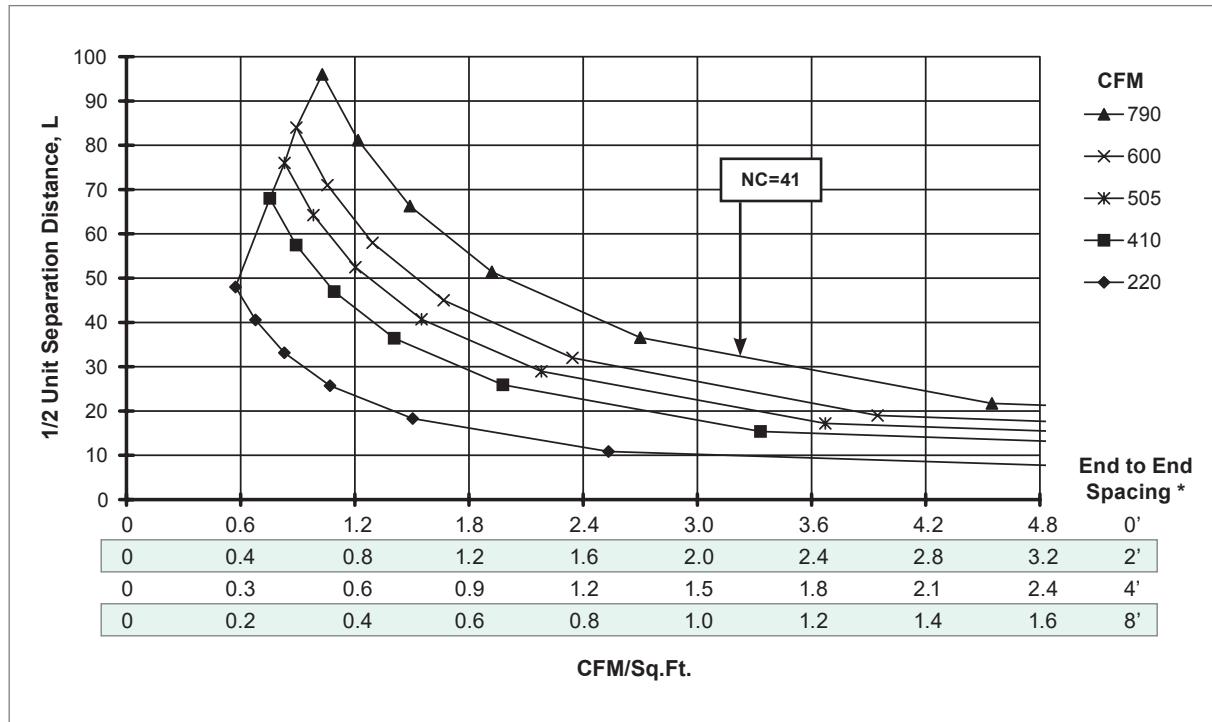

NOTES: Charts are at 20 BTUH/ft² loads.

See the Engineering section of this catalog for instructions on how to read these charts and additional ADPI information.

* Separation distance in feet between active supply sections discharging in similar directions.