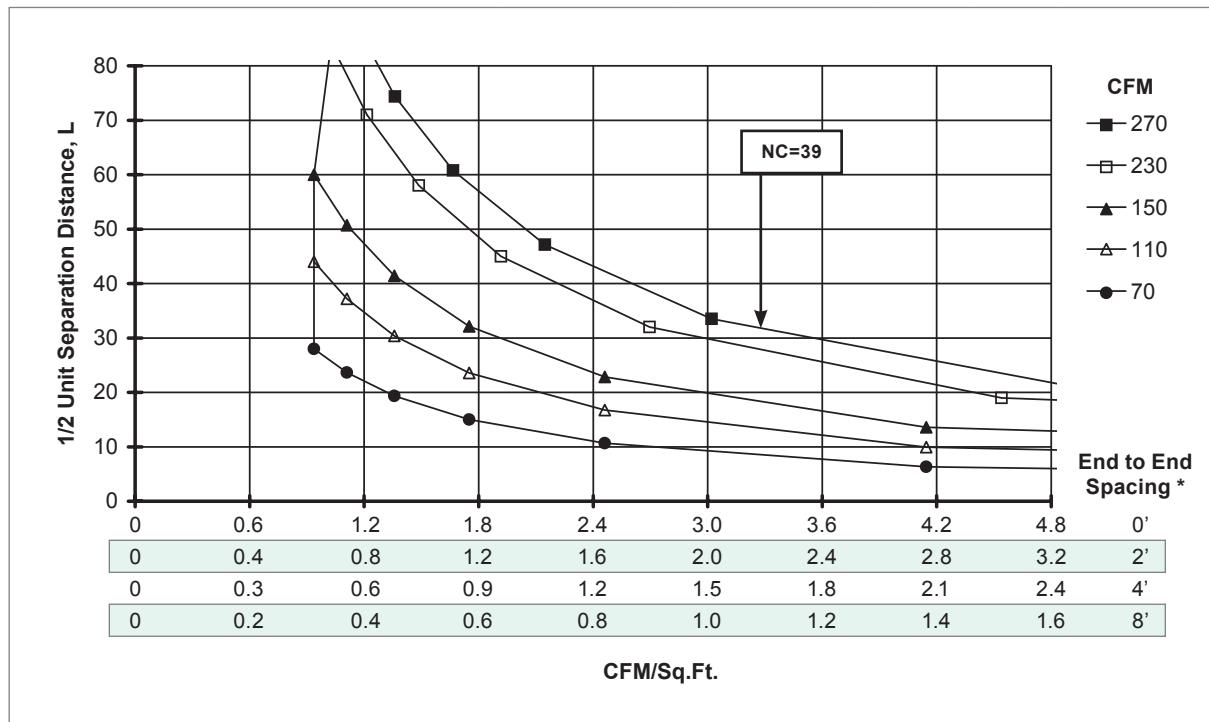
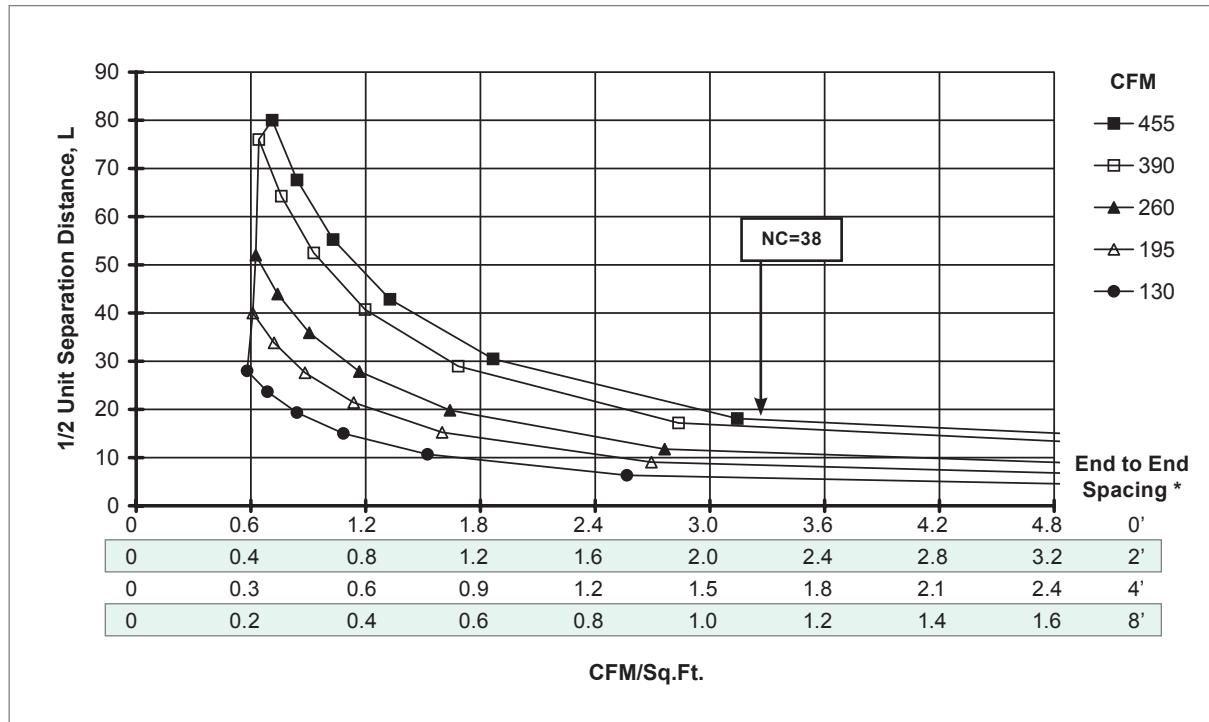


**DFL Reference Charts: For Lay-In T-Bar (DFB) & Narrow-T (DFNT), Horizontal Throw =**
**DIFFUSER SPACING FOR 80% ADPI: DFB/DFNT, 4 FT. LENGTH, 1" SLOT WIDTH, 1-SLOT, 1-WAY, 8" INLET PLENUM**

**DIFFUSER SPACING FOR 80% ADPI: DFB/DFNT, 4 FT. LENGTH, 1" SLOT WIDTH, 2-SLOT, 2-WAY, 8" INLET PLENUM**

*NOTES: Charts are at 20 BTUH/ft<sup>2</sup> loads.*
*See the Engineering section of this catalog for instructions on how to read these charts and additional ADPI information.*
*\* Separation distance in feet between active supply sections discharging in similar directions.*

# E1 LINEAR SLOT DIFFUSERS


DesignFlo® | Architectural Linear Slot Diffuser




Excellence in Air Distribution

## DFL Reference Charts: For Lay-In T-Bar (DFB) & Narrow-T (DFNT), Horizontal Throw =

DIFFUSER SPACING FOR 80% ADPI: DFB/DFNT, 4 FT. LENGTH, 2" SLOT WIDTH, 1-SLOT, 1-WAY, 8" INLET PLENUM

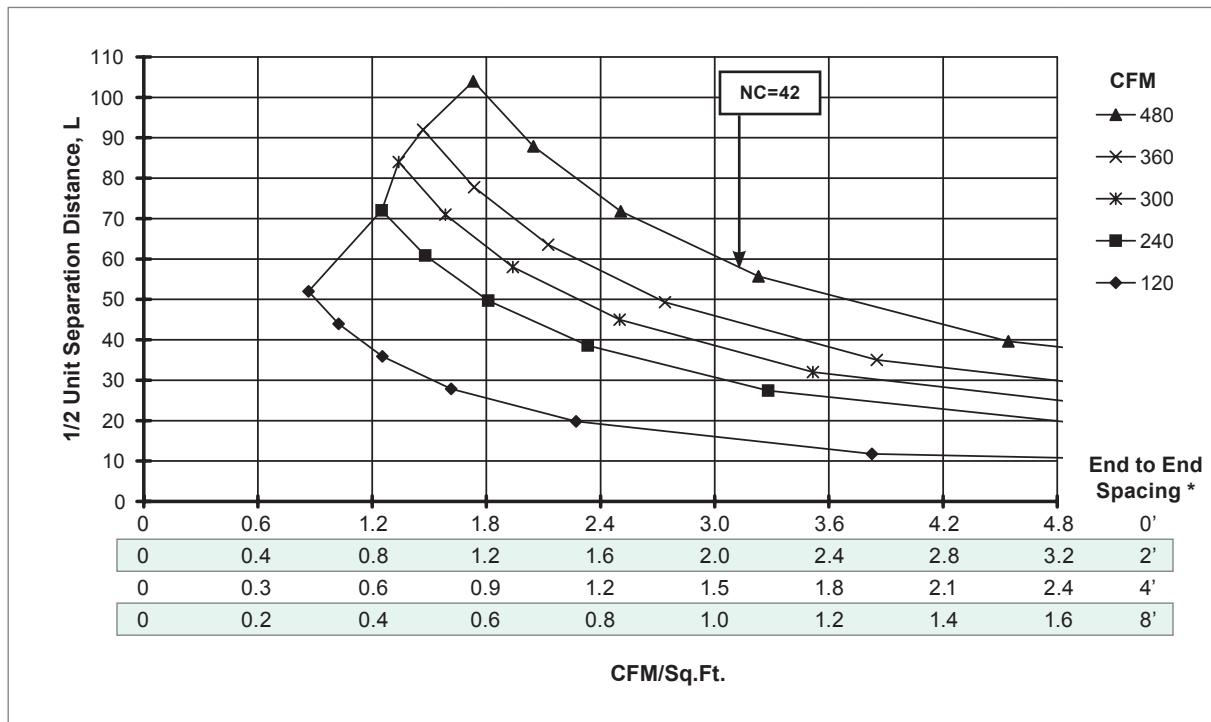

DIFFUSER SPACING FOR 80% ADPI: DFB/DFNT, 4 FT. LENGTH, 2" SLOT WIDTH, 2-SLOT, 2-WAY, 10" INLET PLENUM

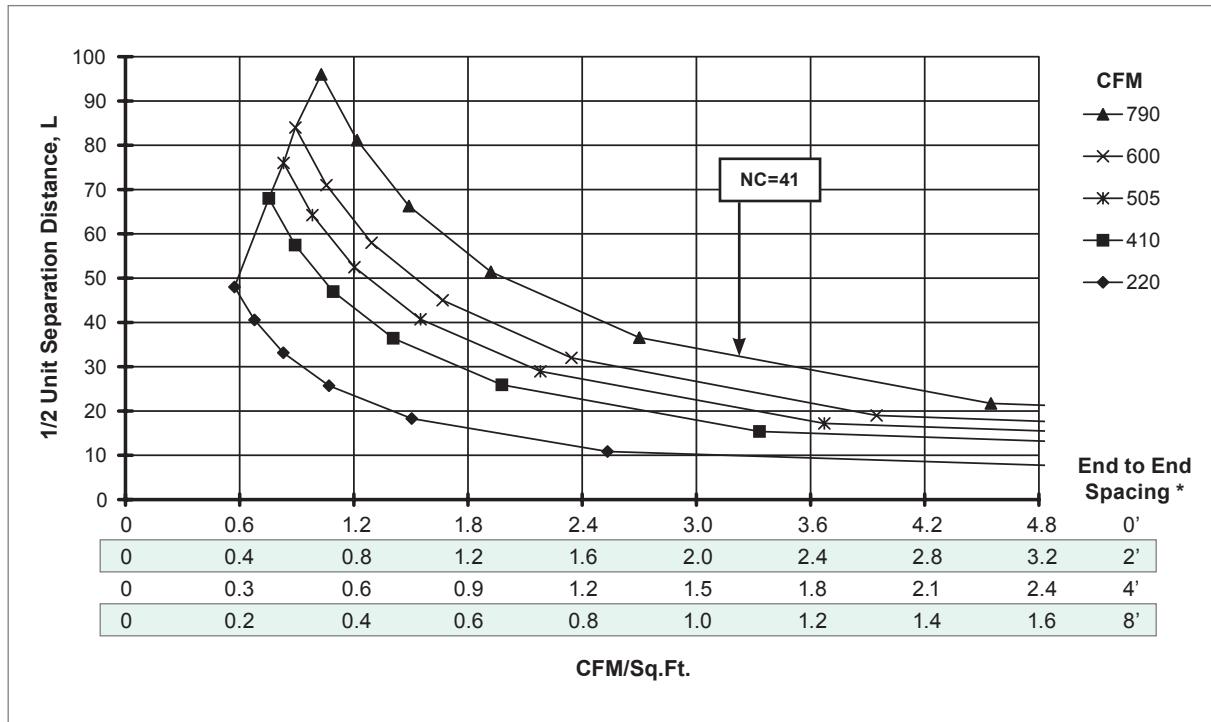

NOTES: Charts are at 20 BTUH/ft<sup>2</sup> loads.

See the Engineering section of this catalog for instructions on how to read these charts and additional ADPI information.

\* Separation distance in feet between active supply sections discharging in similar directions.