

Introduction: 1500, 1800

The 1500 and 1800 architectural linear bar grilles are designed to provide a clean, strong, horizontal look while offering optimum performance. The availability of a variety of frames and finishes allow the grilles to blend, compliment, or contrast with the ceiling, sidewall, sill, or floor installations. These grilles can be used on supply or return portions of heating, cooling or ventilation systems. The 1500/1800 series linear bar grille is an excellent choice for installation in soffit/sill applications where airflow is required to wash over a window.

MODELS

1500 - Supply or Return Linear Bar Grille for Ceiling, Sidewall, or Sill Applications

1800 - Supply or Return Linear Bar Grille with Lay-in, Removable Core for Floor Applications

FEATURES

- Available with 0° blade deflection, 1/2" bar spacing, And 7/32" blade thickness.
- Available with 0° blade deflection, 7/16" bar spacing, And 7/32" blade thickness.
- Available with 15° blade deflection, 1/2" bar spacing, And 7/32" blade thickness.
- Available with 30° blade deflection, 7/16" bar spacing, And 7/32" blade thickness.
- Extruded aluminum construction.
- Section lengths range from 6" to 72" long; units longer than 72" will consist of sections butted together.
- Widths range from 2" to 24" (Model 1500 Series) and 2" to 12" (Model 1800 Series).

ACCESSORIES


- Optional Mitered Corners (Models 1500MC & 1800MC)
- Optional Blank-off Strips
- Optional Linear Straightening Grid (Model LSG)
- Optional Access Door (Model 1500 Series Only)
- Optional Damper

OPTION

- Curving

FINISHES

- Standard finish is #44 British White. (Model 1500 Series)
- Standard finish is #10 Alumican. (Model 1800 Series)
- Optional finishes available.
- Optional anodizing available.

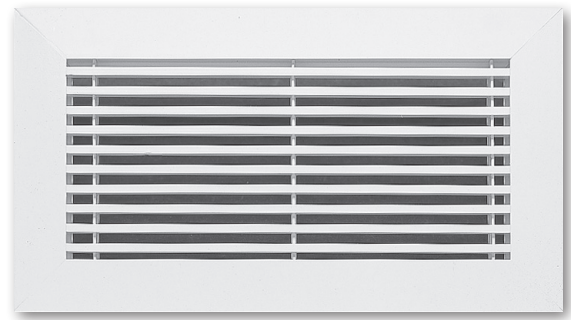


Model 1500



Corresponding mitered corner for Model 1500. WO construction shown.



Model 1800

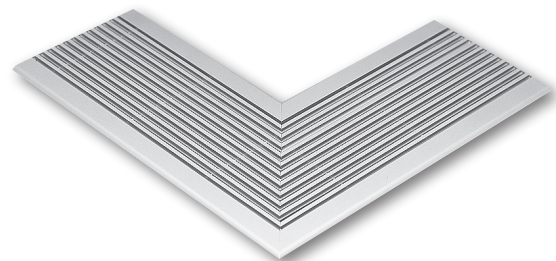

Corresponding mitered corner for Model 1800. CO construction shown.