



RPN
This round punkah nozzle features a surface mounting frame.



CRNRR, 5CRNRR
These concentric ring nozzles feature a stub duct mounting frame for smaller duct work



RPNRD
This round punkah nozzle features a stub duct mounting frame.



CRNP, 5CRNP
These products feature a surface mounting frame with two round concentric ring nozzles.



RPNRR
This round punkah nozzle features a stub duct mounting frame for smaller duct work.



CRNLP, 5CRNLP
This product features a lay-in T-bar frame with one round concentric ring nozzle



RPN2P
This product features a surface mounting frame with two round punkah nozzles.



R580, R5880
These round single and double deflection grilles feature a concealed mounting frame.



RPN4P
This product features a surface mounting frame with four round punkah nozzles.



R580RD, R5880RD
These round single and double deflection grilles feature a round duct adapter frame.




RPNLP
This product features a lay-in T-bar frame with one round punkah nozzle.



R580RR, R5880RR
These round single and double deflection grilles feature a duct reducing mounting frame for smaller duct work.



K-JET
This round jet nozzle mounts to a ceiling tile and supplies a non-adjustable jet of air.



REGC5
These round egg-crate grilles feature a round duct adapter.



K-JET
This round jet nozzle mounts to a ceiling tile and supplies a non-adjustable jet of air.



CRN, 5CRN
These concentric ring nozzles feature a surface mounting frame.



REGC5RD
These round egg-crate grilles feature a duct reducing mounting frame for smaller duct work.



CRNRD, 5CRNRD
These concentric ring nozzles feature a stub duct mounting frame.



REGC5RR
These round egg-crate grilles feature a duct reducing mounting frame for smaller duct work.

RPN Series

Introduction & Dimensional Information....H1-3
Reference Chart & Performance DataH1-8
Engineering Specifications.....H1-10

K-JET, K-JETA

IntroductionH1-12
Dimensional InformationH1-13
Reference Chart H1-13
Performance Data.....H1-14
Engineering Specifications.....H1-16

CRN, 5CRN Series

Introduction & Dimensional Information....H1-17
Reference Chart.....H1-23
Performance Data.....H1-24
Engineering Specifications.....H1-29

R580, R5880 Series

Introduction & Dimensional Information....H1-31
Reference Chart.....H1-34
Performance Data.....H1-35
Engineering Specifications.....H1-39

REGC5 Series

Introduction & Dimensional Information....H1-41
Reference Chart.....H1-44
Performance Data.....H1-45
Engineering Specifications.....H1-49

*K-JET**K-JETA***Introduction: K-JET, K-JETA**

The Krueger K-JET and K-JETA air nozzles are designed to be architecturally attractive when installed along a perimeter wall in overhead ceiling tiles. The nozzles are provided with a retaining ring, which is pushed on to the rear collar to secure the nozzle to the ceiling tile. The nozzles provide a vertical jet of air that is effective in both heating and cooling applications. The K-JETA also has the ability of 60° directional adjustment of the vertical air column by rotation of the center concentric rings making this unit the ideal choice for installation near windows.

Other possible uses for the K-JET and K-JETA:

- New or Retrofit Construction
- Vertical/Horizontal Projection Air Systems
- Perimeter Heating Only - Vertical Air Systems
- Perimeter Heating/Cooling - Vertical Air Systems
- Return and Exhaust

MODELS

- K-JET - Jet Nozzle with Retaining Ring
- K-JETA - Jet Nozzle with Retaining Ring and Adjustable Concentric Ring Core with 60° Directional Adjustment

FEATURES

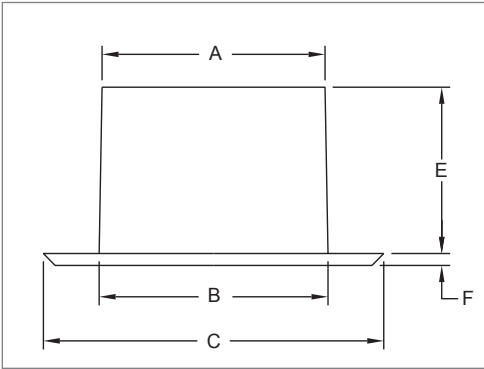
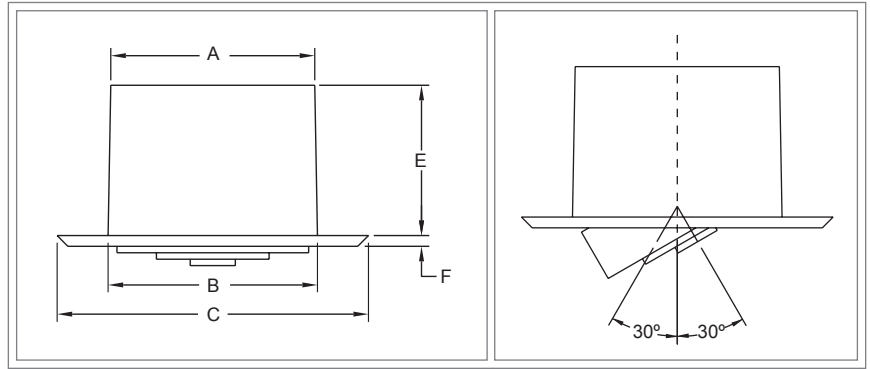
- Spun aluminum construction.
- K-JETA concentric rings are steel construction.

ACCESSORIES

S-Fastener - Countersunk screw holes in the outer flange to secure the unit to ceiling or wall.

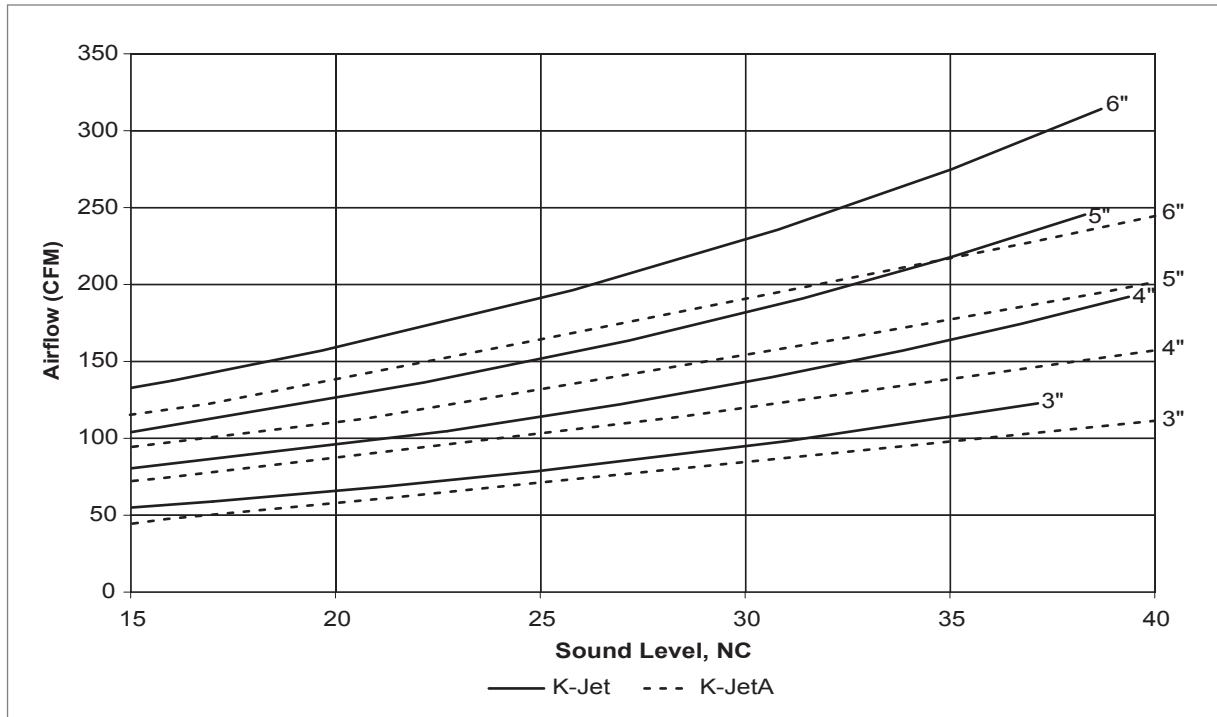
FINISHES

- Mill
- Flat Black
- British White
- Bright White
- Silver Metallic
- Gray Prime

K-JET, K-JETA Dimensional Information
K-JET, NO CORE, SIDE VIEW

K-JETA, CORE & ADJUSTABILITY, SIDE VIEWS

K-JET, K-JETA, DIMENSIONAL DETAILS

Unit Size	A	B	C	E	F
3"	2 3/4" (70)	3 1/4" (83)	5 1/4" (133)	3 1/2" (89)	1/4" (6)
4"	3 3/4" (95)	3 7/8" (98)	6" (152)	3 1/2" (89)	1/4" (6)
5"	4 3/4" (121)	4 7/8" (124)	7 1/4" (184)	3 1/2" (89)	1/4" (6)
6"	5 3/4" (146)	5 7/8" (149)	8 1/4" (210)	2" (51)	1/4" (6)

NOTE: Dimensions in parentheses are mm.

K-JET, K-JETA Reference Chart
AIRFLOW VS. NC: K-JET, K-JETA (NO DAMPER)


K-JET Performance Data

IP/METRIC DATA: K-JET, NO CORE (NO DAMPER)

	IP Data							NC	Metric Data						
	Neck Vel	Air Flow	Pressures		Vertical Throw				Neck Vel	Air Flow	Pressures		Vertical Throw		
			Ps	Pt	-20°R ΔT	Isothermal	+20°R ΔT				Ps	Pt	-11°K ΔT	Isothermal	+11°K ΔT
	FPM	CFM	"WG	"WG	ft	ft	ft		m/s	L/s	Pa	Pa	m	m	m
3" Dia.	400	20	0.002	.012	1 - 3 - 7	1 - 3 - 7	1 - 3 - 7	-	2.03	9	0.4	2.9	0.0 - 0.1 - 0.4	0.0 - 0.1 - 0.4	0.0 - 0.1 - 0.4
	600	29	0.004	.026	3 - 6 - 11	3 - 6 - 10	3 - 5 - 8	-	3.05	14	1.0	6.6	0.1 - 0.3 - 1.0	0.1 - 0.3 - 1.0	0.1 - 0.3 - 1.0
	800	39	0.007	.047	5 - 7 - 13	5 - 7 - 12	4 - 7 - 10	-	4.06	19	1.8	11.7	0.2 - 0.4 - 1.8	0.2 - 0.4 - 1.8	0.2 - 0.4 - 1.8
	1000	49	0.011	.074	6 - 9 - 15	6 - 9 - 13	6 - 8 - 11	12	5.08	23	2.8	18.3	0.3 - 0.7 - 2.8	0.3 - 0.7 - 2.8	0.3 - 0.7 - 2.6
	1200	59	0.016	.106	7 - 11 - 16	7 - 10 - 14	7 - 8 - 12	17	6.10	28	4.0	26.4	0.4 - 1.0 - 3.4	0.4 - 1.0 - 3.4	0.4 - 1.0 - 3.1
	1400	69	0.022	.144	9 - 13 - 18	9 - 11 - 16	7 - 9 - 13	21	7.11	32	5.5	35.9	0.6 - 1.4 - 3.9	0.6 - 1.4 - 3.9	0.6 - 1.4 - 3.6
	1600	79	0.029	.188	10 - 13 - 19	10 - 12 - 17	8 - 10 - 14	25	8.13	37	7.1	46.9	0.8 - 1.8 - 4.5	0.8 - 1.8 - 4.5	0.8 - 1.8 - 4.1
	2000	98	0.045	.294	12 - 15 - 21	11 - 13 - 19	9 - 11 - 15	31	10.16	46	11.2	73.2	1.2 - 2.8 - 5.6	1.2 - 2.8 - 5.6	1.2 - 2.6 - 4.7
4" Dia.	400	35	0.002	.012	2 - 4 - 10	2 - 4 - 10	2 - 4 - 9	-	2.03	16	0.4	2.9	0.2 - 0.4 - 1.4	0.2 - 0.4 - 1.4	0.2 - 0.4 - 1.4
	600	52	0.004	.026	4 - 7 - 15	4 - 7 - 14	4 - 7 - 11	-	3.05	25	1.0	6.6	0.4 - 0.8 - 3.0	0.4 - 0.8 - 3.0	0.4 - 0.8 - 2.7
	800	70	0.007	.047	7 - 10 - 18	7 - 10 - 16	6 - 9 - 13	12	4.06	33	1.8	11.7	0.6 - 1.4 - 4.0	0.6 - 1.4 - 4.0	0.6 - 1.4 - 3.6
	1200	105	0.016	.106	10 - 15 - 22	10 - 14 - 19	9 - 11 - 16	23	6.10	49	4.0	26.4	1.4 - 3.0 - 6.0	1.4 - 3.0 - 5.9	1.4 - 2.7 - 4.8
	1400	122	0.022	.144	12 - 17 - 24	11 - 15 - 21	10 - 12 - 17	27	7.11	58	5.5	35.9	1.9 - 3.5 - 7.0	1.9 - 3.5 - 6.3	1.9 - 3.2 - 5.2
	1600	140	0.029	.188	13 - 18 - 25	13 - 16 - 22	11 - 13 - 18	31	8.13	66	7.1	46.9	2.5 - 4.0 - 7.7	2.5 - 4.0 - 6.8	2.4 - 3.6 - 5.6
	1800	157	0.036	.238	15 - 19 - 27	14 - 17 - 24	11 - 14 - 20	34	9.14	74	9.0	59.3	3.0 - 4.5 - 8.2	3.0 - 4.5 - 7.2	2.7 - 4.1 - 5.9
	2000	175	0.045	.294	16 - 20 - 28	14 - 18 - 25	12 - 15 - 21	37	10.16	82	11.2	73.2	3.3 - 5.0 - 8.6	3.3 - 5.0 - 7.6	3.0 - 4.4 - 6.3
5" Dia.	400	55	0.002	.012	1 - 3 - 10	1 - 3 - 10	1 - 3 - 9	-	2.03	26	0.4	2.9	0.4 - 0.9 - 3.1	0.4 - 0.9 - 3.1	0.4 - 0.9 - 2.8
	500	68	0.003	.018	2 - 4 - 13	2 - 4 - 13	2 - 4 - 12	-	2.54	32	0.7	4.6	0.6 - 1.3 - 3.9	0.6 - 1.3 - 3.9	0.6 - 1.3 - 3.5
	600	82	0.004	.026	3 - 6 - 15	3 - 6 - 15	3 - 6 - 14	-	3.05	39	1.0	6.6	0.9 - 1.9 - 4.7	0.9 - 1.9 - 4.7	0.9 - 1.9 - 4.3
	800	109	0.007	.047	5 - 10 - 21	5 - 10 - 20	5 - 9 - 16	16	4.06	51	1.8	11.7	1.5 - 3.1 - 6.2	1.5 - 3.1 - 6.0	1.5 - 2.8 - 4.9
	1000	136	0.011	.074	8 - 13 - 25	8 - 13 - 22	8 - 12 - 18	22	5.08	64	2.8	18.3	2.4 - 3.9 - 7.6	2.4 - 3.9 - 6.7	2.4 - 3.5 - 5.5
	1200	164	0.016	.106	10 - 15 - 27	10 - 15 - 24	9 - 14 - 20	27	6.10	77	4.0	26.4	3.1 - 4.7 - 8.3	3.1 - 4.7 - 7.3	2.8 - 4.3 - 6.1
	1400	191	0.022	.144	12 - 18 - 30	12 - 18 - 26	11 - 15 - 22	31	7.11	90	5.5	35.9	3.6 - 5.5 - 9.0	3.6 - 5.4 - 7.9	3.3 - 4.6 - 6.5
	1600	218	0.029	.188	14 - 21 - 32	14 - 20 - 28	12 - 16 - 23	35	8.13	103	7.1	46.9	4.2 - 6.2 - 9.6	4.1 - 6.0 - 8.5	3.8 - 4.9 - 7.0
6" Dia.	400	79	0.002	.012	3 - 6 - 15	3 - 6 - 15	3 - 6 - 13	-	2.03	37	0.4	2.9	0.8 - 1.8 - 4.5	0.8 - 1.8 - 4.5	0.8 - 1.8 - 4.1
	500	98	0.003	.018	4 - 9 - 18	4 - 9 - 18	4 - 8 - 15	-	2.54	46	0.7	4.6	1.2 - 2.8 - 5.6	1.2 - 2.8 - 5.6	1.2 - 2.6 - 4.7
	600	118	0.004	.026	6 - 11 - 22	6 - 11 - 20	6 - 10 - 17	12	3.05	56	1.0	6.6	1.8 - 3.4 - 6.7	1.8 - 3.4 - 6.2	1.8 - 3.1 - 5.1
	700	137	0.005	.036	8 - 13 - 25	8 - 13 - 22	8 - 12 - 18	16	3.56	65	1.4	9.0	2.4 - 3.9 - 7.6	2.4 - 3.9 - 6.7	2.4 - 3.6 - 5.6
	800	157	0.007	.047	10 - 15 - 27	10 - 15 - 24	9 - 13 - 20	20	4.06	74	1.8	11.7	3.0 - 4.5 - 8.2	3.0 - 4.5 - 7.2	2.7 - 4.1 - 5.9
	1000	196	0.011	.074	12 - 18 - 30	12 - 18 - 26	11 - 15 - 22	26	5.08	93	2.8	18.3	3.7 - 5.6 - 9.1	3.7 - 5.6 - 8.0	3.4 - 4.7 - 6.6
	1200	236	0.016	.106	15 - 22 - 33	15 - 20 - 29	13 - 17 - 24	31	6.10	111	4.0	26.4	4.5 - 6.7 - 10.0	4.5 - 6.2 - 8.8	4.1 - 5.1 - 7.3
	1400	275	0.022	.144	17 - 25 - 36	17 - 22 - 31	15 - 18 - 26	35	7.11	130	5.5	35.9	5.2 - 7.6 - 10.8	5.2 - 6.7 - 9.5	4.5 - 5.6 - 7.8
1600	314	0.029	.188	20 - 27 - 38	19 - 24 - 33	16 - 20 - 28	39	8.13	148	7.1	46.9	6.0 - 8.2 - 11.5	5.9 - 7.2 - 10.2	4.8 - 5.9 - 8.4	

NOTES: NC values are based on octave band 2 - 7 sound power levels minus a room absorption 10dB, re 10⁻¹² Watts. Dash in space denotes a NC value less than 10. Data was obtained from tests conducted in accordance with ANSI/ASHRAE Standard 70. Throw values are given for terminal velocities of 150, 100, and 50 FPM (0.75, 0.50, and 0.25 m/s) free jet. Vertical throw is given for the temperature differences shown. The proper representation of ΔT in Fahrenheit is (°R) and in Centigrade it is (°K).

AIR NOZZLES & ROUND GRILLES

K J E T - K J E T A

K-JETA Performance Data
IP/METRIC DATA: K-JETA, WITH CORE (NO DAMPER)

	IP Data							NC	Metric Data						
	Neck Vel	Air Flow	Pressures		Vertical Throw				Neck Vel	Air Flow	Pressures		Vertical Throw		
			Ps	Pt	-20°R ΔT	Isothermal	+20°R ΔT				-11°K ΔT	Isothermal	+11°K ΔT		
	FPM	CFM	"WG	"WG	ft	ft	ft		m/s	L/s	Pa	Pa	m	m	m
3" Dia.	400	20	0.006	.016	1 - 3 - 7	1 - 3 - 7	1 - 3 - 7	-	2.03	9	1.5	4.0	0.0 - 0.1 - 0.4	0.0 - 0.1 - 0.4	0.0 - 0.1 - 0.4
	600	29	0.014	.036	3 - 6 - 11	3 - 6 - 10	3 - 5 - 8	-	3.05	14	3.4	9.0	0.1 - 0.3 - 1.0	0.1 - 0.3 - 1.0	0.1 - 0.3 - 1.0
	800	39	0.024	.064	5 - 7 - 13	5 - 7 - 12	4 - 7 - 10	-	4.06	19	6.0	15.9	0.2 - 0.4 - 1.8	0.2 - 0.4 - 1.8	0.2 - 0.4 - 1.8
	1000	49	0.038	.100	6 - 9 - 15	6 - 9 - 13	6 - 8 - 11	16	5.08	23	9.4	24.9	0.3 - 0.7 - 2.8	0.3 - 0.7 - 2.8	0.3 - 0.7 - 2.6
	1200	59	0.054	.144	7 - 11 - 16	7 - 10 - 14	7 - 8 - 12	21	6.10	28	13.5	35.9	0.4 - 1.0 - 3.4	0.4 - 1.0 - 3.4	0.4 - 1.0 - 3.1
	1400	69	0.074	.196	9 - 13 - 18	9 - 11 - 16	7 - 9 - 13	25	7.11	32	18.4	48.8	0.6 - 1.4 - 3.9	0.6 - 1.4 - 3.9	0.6 - 1.4 - 3.6
	1600	79	0.096	.256	10 - 13 - 19	10 - 12 - 17	8 - 10 - 14	29	8.13	37	24.0	63.7	0.8 - 1.8 - 4.5	0.8 - 1.8 - 4.5	0.8 - 1.8 - 4.1
	2000	98	0.151	.400	12 - 15 - 21	11 - 13 - 19	9 - 11 - 15	36	10.16	46	37.5	99.6	1.2 - 2.8 - 5.6	1.2 - 2.8 - 5.6	1.2 - 2.6 - 4.7
2500	123	0.235	.625	14 - 17 - 24	12 - 15 - 21	10 - 12 - 17	43	12.70	58	58.6	155.6	1.9 - 3.5 - 7.0	1.9 - 3.5 - 6.4	1.9 - 3.2 - 5.2	
4" Dia.	400	35	0.006	.016	2 - 4 - 10	2 - 4 - 10	2 - 4 - 9	-	2.03	16	1.5	4.0	0.2 - 0.4 - 1.4	0.2 - 0.4 - 1.4	0.2 - 0.4 - 1.4
	600	52	0.014	.036	4 - 7 - 15	4 - 7 - 14	4 - 7 - 11	-	3.05	25	3.4	9.0	0.4 - 0.8 - 3.0	0.4 - 0.8 - 3.0	0.4 - 0.8 - 2.7
	800	70	0.024	.064	7 - 10 - 18	7 - 10 - 16	6 - 9 - 13	16	4.06	33	6.0	15.9	0.6 - 1.4 - 4.0	0.6 - 1.4 - 4.0	0.6 - 1.4 - 3.6
	1200	105	0.054	.144	10 - 15 - 22	10 - 14 - 19	9 - 11 - 16	28	6.10	49	13.5	35.9	1.4 - 3.0 - 6.0	1.4 - 3.0 - 5.9	1.4 - 2.7 - 4.8
	1400	122	0.074	.196	12 - 17 - 24	11 - 15 - 21	10 - 12 - 17	32	7.11	58	18.4	48.8	1.9 - 3.5 - 7.0	1.9 - 3.5 - 6.3	1.9 - 3.2 - 5.2
	1600	140	0.096	.256	13 - 18 - 25	13 - 16 - 22	11 - 13 - 18	36	8.13	66	24.0	63.7	2.5 - 4.0 - 7.7	2.5 - 4.0 - 6.8	2.4 - 3.6 - 5.6
	1800	157	0.122	.324	15 - 19 - 27	14 - 17 - 24	11 - 14 - 20	40	9.14	74	30.4	80.7	3.0 - 4.5 - 8.2	3.0 - 4.5 - 7.2	2.7 - 4.1 - 5.9
	2000	175	0.151	.400	16 - 20 - 28	14 - 18 - 25	12 - 15 - 21	43	10.16	82	37.5	99.6	3.3 - 5.0 - 8.6	3.3 - 5.0 - 7.6	3.0 - 4.4 - 6.3
2200	192	0.182	.484	17 - 21 - 30	15 - 19 - 26	12 - 15 - 22	46	11.18	91	45.4	120.5	3.7 - 5.5 - 9.0	3.6 - 5.5 - 8.0	3.3 - 4.6 - 6.6	
5" Dia.	300	41	0.003	.009	1 - 2 - 6	1 - 2 - 6	1 - 2 - 6	-	1.52	19	0.8	2.2	0.2 - 0.5 - 1.9	0.2 - 0.5 - 1.9	0.2 - 0.5 - 1.9
	400	55	0.006	.016	1 - 3 - 10	1 - 3 - 10	1 - 3 - 9	-	2.03	26	1.5	4.0	0.4 - 0.9 - 3.1	0.4 - 0.9 - 3.1	0.4 - 0.9 - 2.8
	600	82	0.014	.036	3 - 6 - 15	3 - 6 - 15	3 - 6 - 14	12	3.05	39	3.4	9.0	0.9 - 1.9 - 4.7	0.9 - 1.9 - 4.7	0.9 - 1.9 - 4.3
	800	109	0.024	.064	5 - 10 - 21	5 - 10 - 20	5 - 9 - 16	21	4.06	51	6.0	15.9	1.5 - 3.1 - 6.2	1.5 - 3.1 - 6.0	1.5 - 2.8 - 4.9
	1000	136	0.038	.100	8 - 13 - 25	8 - 13 - 22	8 - 12 - 18	28	5.08	64	9.4	24.9	2.4 - 3.9 - 7.6	2.4 - 3.9 - 6.7	2.4 - 3.5 - 5.5
	1200	164	0.054	.144	10 - 15 - 27	10 - 15 - 24	9 - 14 - 20	33	6.10	77	13.5	35.9	3.1 - 4.7 - 8.3	3.1 - 4.7 - 7.3	2.8 - 4.3 - 6.1
	1400	191	0.074	.196	12 - 18 - 30	12 - 18 - 26	11 - 15 - 22	37	7.11	90	18.4	48.8	3.6 - 5.5 - 9.0	3.6 - 5.4 - 7.9	3.3 - 4.6 - 6.5
	1600	218	0.096	.256	14 - 21 - 32	14 - 20 - 28	12 - 16 - 23	41	8.13	103	24.0	63.7	4.2 - 6.2 - 9.6	4.1 - 6.0 - 8.5	3.8 - 4.9 - 7.0
1800	245	0.122	.324	15 - 23 - 34	15 - 21 - 30	14 - 17 - 24	45	9.14	116	30.4	80.7	4.7 - 7.0 - 10.2	4.7 - 6.4 - 9.0	4.3 - 5.2 - 7.4	
6" Dia.	300	59	0.003	.009	1 - 3 - 11	1 - 3 - 11	1 - 3 - 10	-	1.52	28	0.8	2.2	0.4 - 1.0 - 3.4	0.4 - 1.0 - 3.4	0.4 - 1.0 - 3.1
	400	79	0.006	.016	3 - 6 - 15	3 - 6 - 15	3 - 6 - 13	-	2.03	37	1.5	4.0	0.8 - 1.8 - 4.5	0.8 - 1.8 - 4.5	0.8 - 1.8 - 4.1
	500	98	0.009	.025	4 - 9 - 18	4 - 9 - 18	4 - 8 - 15	11	2.54	46	2.3	6.2	1.2 - 2.8 - 5.6	1.2 - 2.8 - 5.6	1.2 - 2.6 - 4.7
	600	118	0.014	.036	6 - 11 - 22	6 - 11 - 20	6 - 10 - 17	17	3.05	56	3.4	9.0	1.8 - 3.4 - 6.7	1.8 - 3.4 - 6.2	1.8 - 3.1 - 5.1
	800	157	0.024	.064	10 - 15 - 27	10 - 15 - 24	9 - 13 - 20	25	4.06	74	6.0	15.9	3.0 - 4.5 - 8.2	3.0 - 4.5 - 7.2	2.7 - 4.1 - 5.9
	1000	196	0.038	.100	12 - 18 - 30	12 - 18 - 26	11 - 15 - 22	32	5.08	93	9.4	24.9	3.7 - 5.6 - 9.1	3.7 - 5.6 - 8.0	3.4 - 4.7 - 6.6
	1200	236	0.054	.144	15 - 22 - 33	15 - 20 - 29	13 - 17 - 24	37	6.10	111	13.5	35.9	4.5 - 6.7 - 10.0	4.5 - 6.2 - 8.8	4.1 - 5.1 - 7.3
	1400	275	0.074	.196	17 - 25 - 36	17 - 22 - 31	15 - 18 - 26	42	7.11	130	18.4	48.8	5.2 - 7.6 - 10.8	5.2 - 6.7 - 9.5	4.5 - 5.6 - 7.8
1600	314	0.096	.256	20 - 27 - 38	19 - 24 - 33	16 - 20 - 28	46	8.13	148	24.0	63.7	6.0 - 8.2 - 11.5	5.9 - 7.2 - 10.2	4.8 - 5.9 - 8.4	

NOTES: NC values are based on octave band 2 - 7 sound power levels minus a room absorption 10dB, re 10⁻¹² Watts. Dash in space denotes a NC value less than 10. Data was obtained from tests conducted in accordance with ANSI/ASHRAE Standard 70. Throw values are given for terminal velocities of 150, 100, and 50 FPM (0.75, 0.50, and 0.25 m/s) free jet. Vertical throw is given for the temperature differences shown. The proper representation of ΔT in Fahrenheit is (°R) and in Centigrade it is (°K).

K-JET, K-JETA Suggested Specification & Configuration

K-JET

The air nozzle shall be a Krueger model K-JET. The nozzle shall be constructed out of aluminum. The K-JET shall have a retaining ring for mounting the nozzle without the need of special tools. (Optional countersunk screw holes in the frame are available.)

K-JETA

The adjustable air nozzle shall be a Krueger model K-JETA. The nozzle shall be constructed out of aluminum with a steel concentric ring core. The steel concentric ring core shall rotate on an axis providing 60° of rotation and hold the setting without further adjustments through the catalog performance range. The K-JETA shall have a retaining ring for mounting the nozzle without the need of special tools. (Optional countersunk screw holes in the frame are available.)

PERFORMANCE

The manufacturer shall provide published (printed or electronic) performance data for the diffuser. Performance data shall include 2 - 7 octave band sound power levels. The diffuser shall be tested in accordance to the data standards at the time of product introduction or ANSI/ASHRAE Standard 70-1991 and velocity profile data tested in accordance with ANSI/ASHRAE Standard 113-90 at both isothermal and at various ΔT conditions.

1. SERIES: (XXXXX)

- KJET - Aluminum Ceiling Nozzle, No Core
- KJETA - Aluminum Ceiling Nozzle with Steel Core

2. DIAMETER: (X)

- 3"
- 4"
- 5"
- 6"

3. FASTENING: (X)

- 0 - Easy Mount Retaining Ring
- S - Countersunk Screw Holes

4. FINISH: (XX)

- 01 - Mill *
- 40 - Flat Black
- 44 - British White
- 50 - Bright White
- 61 - Grey Prime
- 70 - Silver Metallic

* Mill finish not available on model K-JETA.

SAMPLE CONFIGURATION: K-JETA - 5 - 0 - 44