


JOB NAME _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 LOCATION _____

SUBMITTAL SHEET
 Form Number DS0076.2 Effective Date 11/06
 Replaces DS0076.1



RPNLP ROUND PUNKAH NOZZLE
PANEL MOUNT NOZZLE FOR LAY-IN TEE BAR

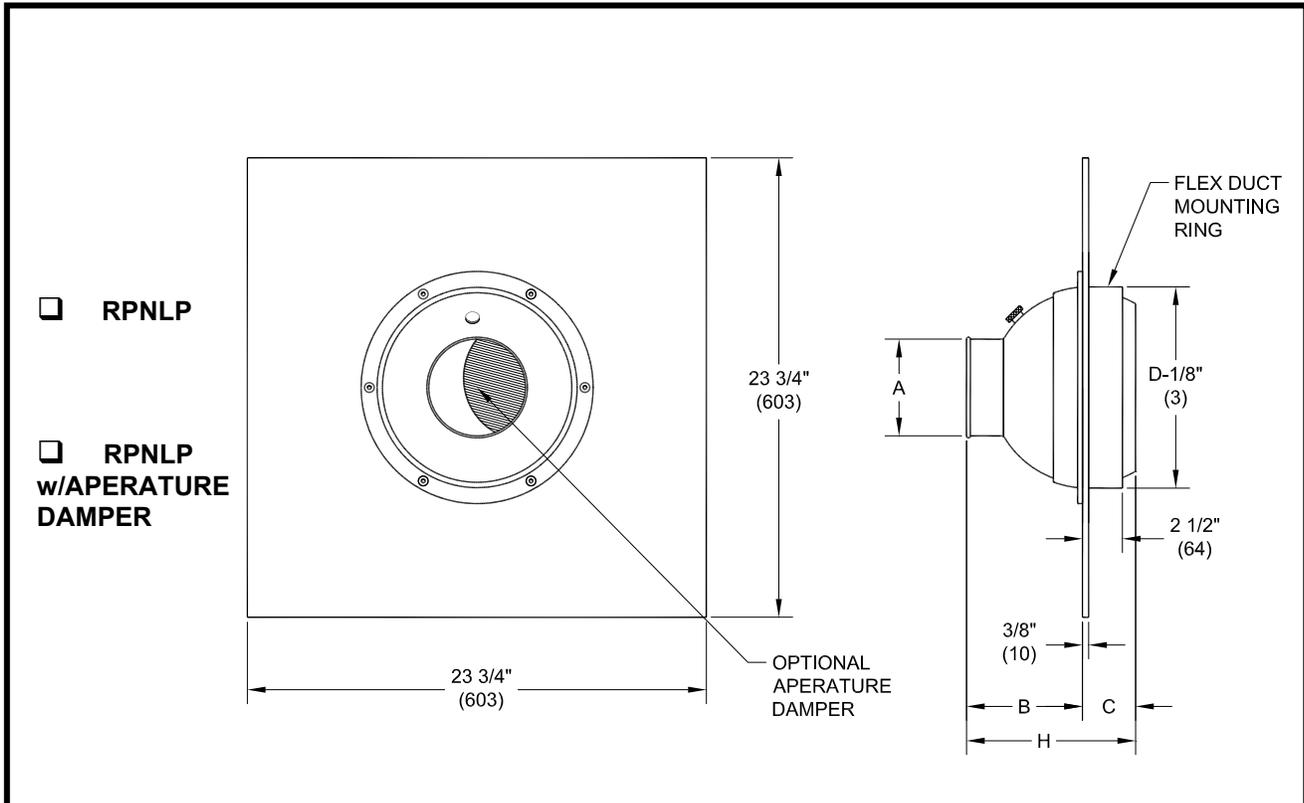

NOMINAL SIZE	A	B	C	DUCT SIZE D	H
6	3" (76)	3 3/8" (86)	2 1/2" (64)	6" (152)	5 7/8" (149)
8	4 3/8" (111)	4 9/16" (116)	2 1/2" (64)	8" (203)	7 1/16" (179)
10	5 3/4" (146)	5 13/16" (148)	2 9/16" (65)	10" (254)	8 3/8" (213)
12	7 3/8" (187)	6 5/16" (160)	2 11/16" (68)	12" (305)	9" (229)

DIMENSIONS ARE GIVEN AS INCHES (MM)

NOTE: DIMENSIONS ROUNDED TO THE NEAREST 1/16" (2)

STANDARD FEATURES:

1. Easy Finger Tip Adjustment.
2. Directional Air Pattern Control
70° Global Rotation Minimum.
± 35° Deflection
360° Rotation
3. Heavy Gage Aluminum Nozzle and Panel Construction.
4. Stainless Steel Damper Hardware.
5. Foam Gasket.
6. Flex Duct Mounting Ring.
7. Aperture Damper must be ordered with the unit, it cannot be field installed.
8. Standard Finish is 44 White.
9. Other finishes are available.