


JOB NAME \_\_\_\_\_  
 ARCHITECT \_\_\_\_\_  
 ENGINEER \_\_\_\_\_  
 CONTRACTOR \_\_\_\_\_  
 LOCATION \_\_\_\_\_

**SUBMITTAL SHEET**  
 Form Number TSLP01-EC.1 Effective Date 05/08  
 Replaces Form: TSLP01-EC.0



**LMHS**  
**LOW PROFILE ATTENUATOR UNIT - ELECTRIC or ELECTRONIC CONTROL**

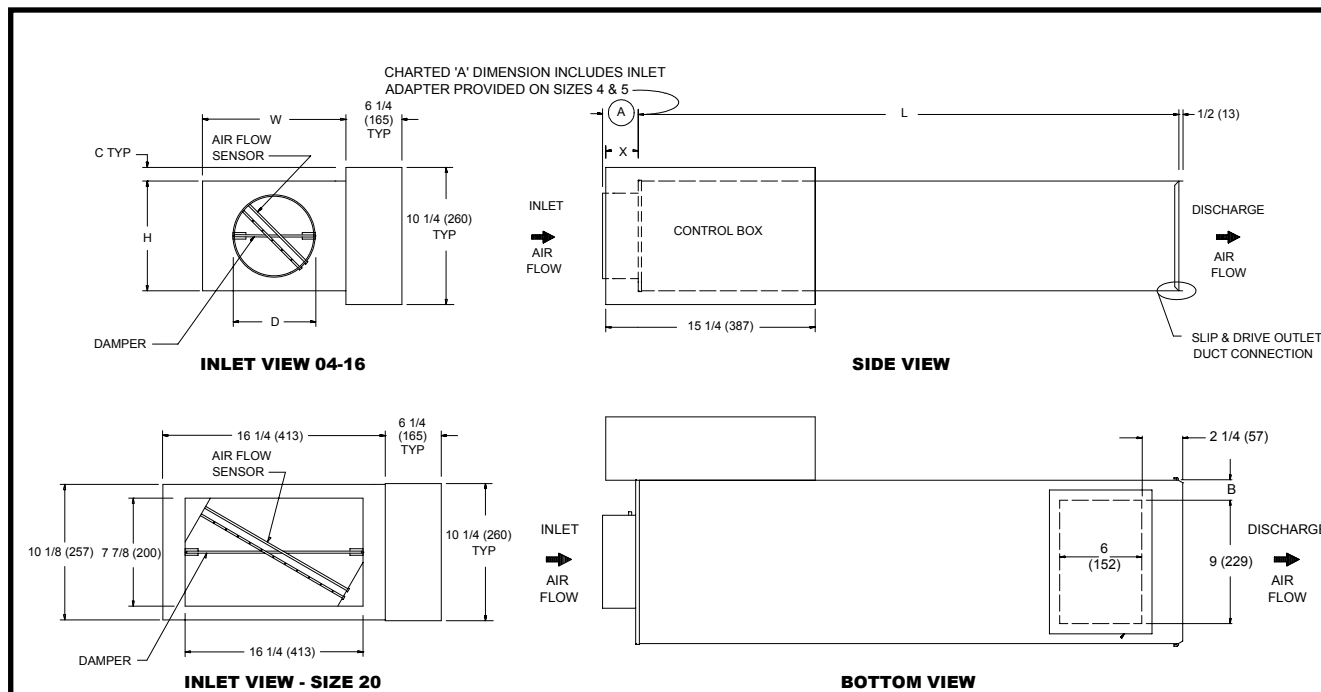

**STANDARD FEATURES:**

- 22 Ga. Zinc coated steel construction.
- **NEMA 1** steel control enclosure for electric or electronic components
- 1/2" thick dual density fiberglass insulation meeting **NFPA 90A** and **UL 181** safety requirements.
- Linear averaging sensor.
- Variety of electric, analog, and digital control packages for pressure dependent and pressure independent systems.
- **ETL** listed – Adherence to **UL 429** for electrically operated valves.
- **ARI** certified sound ratings

**NOTE:** Right hand configuration shown, left hand available.

**OPTIONAL FEATURES:**

- 20 Ga. Zinc coated steel construction
- > Liners:
  - Cellular insulation
  - Steriliner
  - Sterilwall
  - Perf double wall
  - 1" dual density fiberglass insulation
- Four quadrant averaging cross flow sensor
- 24 Volt transformer
- Disconnect switch for electronic controls.
- Dust tight control enclosure.
- Left hand control enclosure.
- Right hand control enclosure.
- Bottom access panel
- Cam lock bottom access panel
- Hanger Brackets

**DIMENSIONS ARE GIVEN AS INCHES (MM)**

INLET SIZE	NOM MAX CFM (L/s)	L	W	H	A	B	C	D	X
4	230 (109)	39 1/2" (1003)	12 (305)	8 (203)	5 3/8 (136)	1 1/2 (38)	1 1/8 (29)	3 7/8 (98)	2 5/8 (67)
5	360 (170)	39 1/2" (1003)	12 (305)	8 (203)	5 3/8 (136)	1 1/2 (38)	1 1/8 (29)	4 7/8 (124)	2 5/8 (67)
6	520 (245)	39 1/2" (1003)	12 (305)	8 (203)	3 3/8 (86)	1 1/2 (38)	1 1/8 (29)	5 7/8 (149)	2 5/8 (67)
7	710 (335)	39 1/2" (1003)	12 (305)	10 (254)	3 3/8 (86)	1 1/2 (38)	1/8 (3)	6 7/8 (175)	2 5/8 (67)
8	925 (437)	39 1/2" (1003)	12 (305)	10 (254)	3 3/8 (86)	1 1/2 (38)	1/8 (3)	7 7/8 (200)	2 5/8 (67)
20	2100 (991)	39 1/2" (1003)	16 1/4 (406)	10 (254)	2 7/8 (73)	3 5/8 (92)	1/8 (3)	N/A	2 5/8 (67)