

### INTRODUCTION

The 91610, 91620 and 91520 architectural linear stainless steel bar grilles are designed to provide a clean, strong, horizontal look while offering optimum performance. The availability of a variety of frames allow the grilles to blend, compliment, or contrast with the ceiling, sidewall, or sill installations. These grilles can be used on supply or return portions of heating, cooling or ventilation systems. The 91610, 91620 and 91520 series linear stainless steel bar grille is an excellent choice for installation in soffit/sill applications where airflow is required to wash over a window in a high humidity location.



### FEATURES

- Single section lengths from 4" to 60"; widths from 4" - 24"
- 304 Stainless steel construction (316 optional)
- Standard finish is 90 - #4 Satin Polish or 44 - British White

### MODELS

- 91610 - Supply or return linear bar grille with 0° or 15° blade deflection, 3/8" bar spacing, and 1/8" bar thickness
- 91620 - Supply or return linear bar grille with 0° or 15° blade deflection, 1/2" bar spacing, and 1/8" bar thickness
- 91520 - Supply or return linear bar grille with 0° blade deflection, 1/2" bar spacing, and 1/4" bar thickness


### OPTIONS

- Concealed fastening

### ACCESSORIES

- Stainless steel OBD welded to unit, adjustable from face of grille (model 9OBD)
- Blank-off strip
- Linear straightening grid

### DIMENSIONAL DATA | 91610

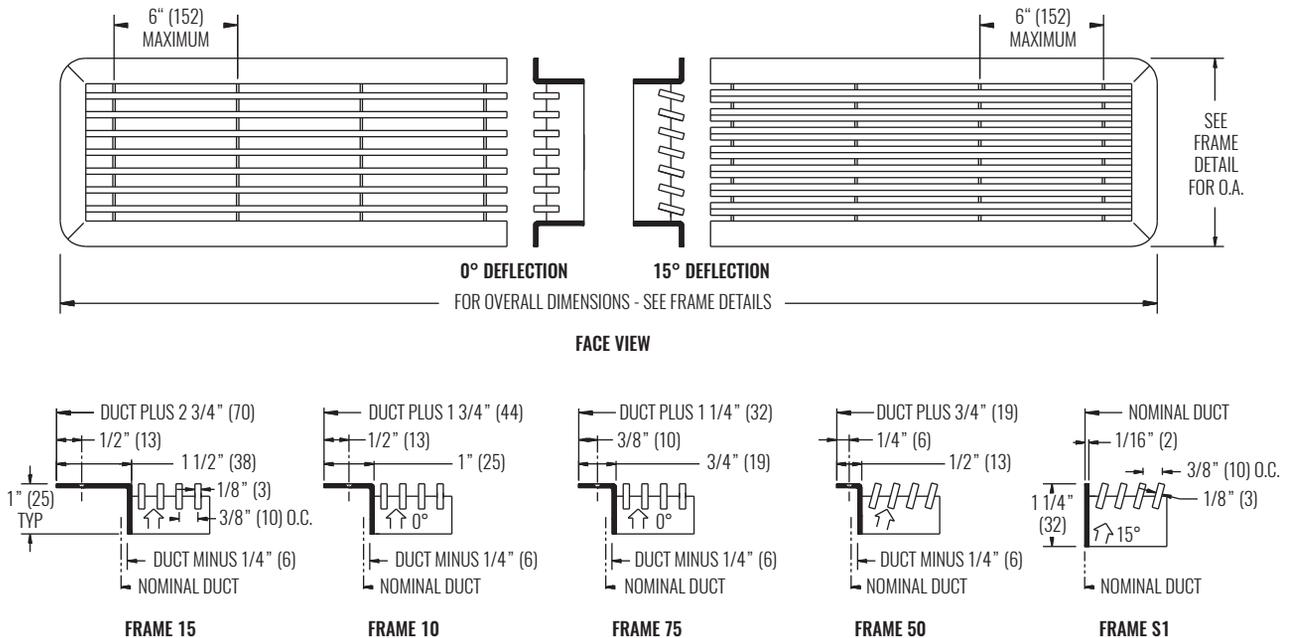

**NOTE:** Dimensions in parentheses are millimeters (mm).