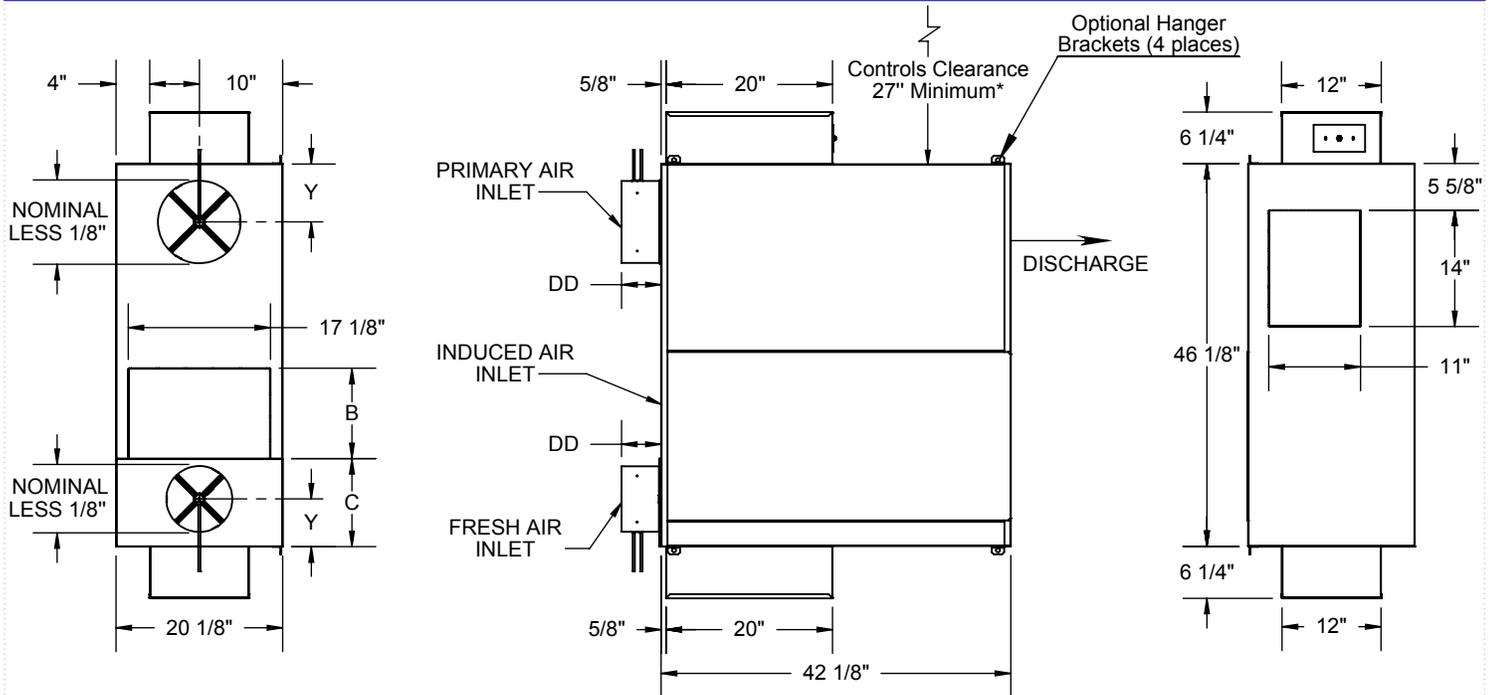


**KQFS-FA Unit Size 4**
*Cooling Only with Electronic Controls*
**SUBMITTAL SHEET**


Fresh Air				
Inlet Size	Y	DD	B	C
4"	6"	6 7/8"	12 7/8"	8 7/8"
5"	6"	6 7/8"	12 7/8"	8 7/8"
6"	6"	4 7/8"	12 7/8"	8 7/8"
7"	7"	4 7/8"	11 7/8"	9 7/8"
8"	6"	4 7/8"	10 7/8"	10 7/8"

Primary Air		
Inlet Size	Y	DD
6"	6"	4 7/8"
8"	6"	4 7/8"
10"	7"	4 7/8"
12"	7"	6 7/8"

**INLET VIEW**
**PLAN VIEW - LEFT HAND UNIT\*\***
**DISCHARGE VIEW**
**STANDARD FEATURES:**

- 20GA. Galvanized Steel Construction
- Steel Control Enclosures for Electronic Components
- 1/2" Thick Dual Density Fiberglass Insulation Meeting NFPA 90A and UL181 Safety Requirements
- 1/4 HP Single Speed, Single Phase, Permanently Lubricated PSC Motor
  - 120V     208/240V     277V
- Field Adjustable Fan Speed Control
- Bottom Access Panel for Service
- Integral Induced Air Attenuator
- 4 Quadrant, Center Averaging Inlet Flow Sensor
- Factory Supplied 24 Volt Control Transformer for Electronic Controls
- ETL Listed
- Performance Data per AHRI Standard 880

**OPTIONAL FEATURES:**

- Liners
  - 3/8" Cellular Insulation                       No Liner
  - 1" Dual Density Fiberglass Insulation
  - 13/16" Steriliner Duct Board Insulation
  - Solid Metal Liner with 1/2" Dual Density Fiberglass
  - 1/2" Foil Encapsulated Fiberglass Insulation
  - 1" Foil Encapsulated Fiberglass Insulation
  - Perforated Metal Liner with 1/2" Dual Density Fiberglass
- Linear Averaging Inlet Flow Sensor
- Motor Toggle Disconnect Switch               Motor Fusing
- Left Hand Controls                                   Right Hand Controls
- Dust Tight Control Enclosure                       Cam Lock Access
- Construction Type Air Filter – 14" x 19" x 1"
- Hanger Brackets  
(Not Available with Sterilwall or Perforated Wall Liner)

\* Check NEC for Unit Clearance Requirements

\*\* Primary Inlet Location Determines Orientation of Unit