


JOB NAME _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 LOCATION _____

SUBMITTALSHEET
 Form Number: R6009 Effective Date 7/13
NEW




SERIES SHR, SHPCR, 5SHR & 5SHPCR
24"X 24" SQUARE FACE – ROUND NECK WITH R-6 INSULATION


CROSS SECTION




FACE VIEW

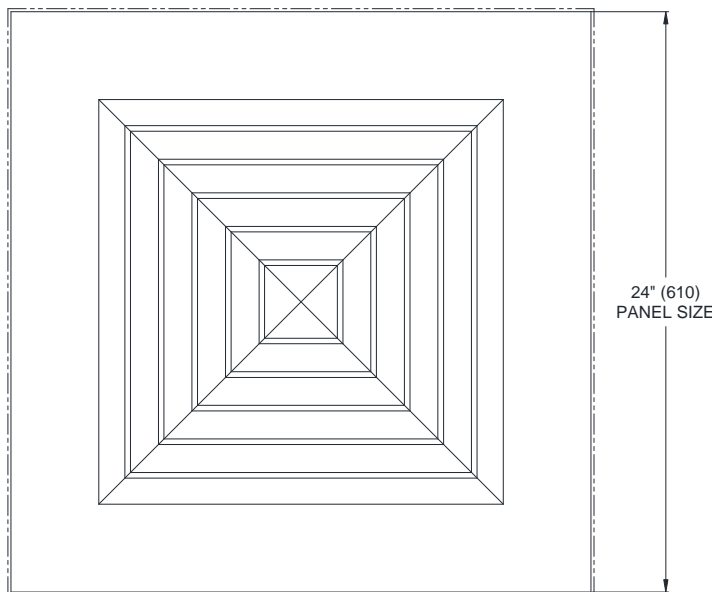


FRAME 23

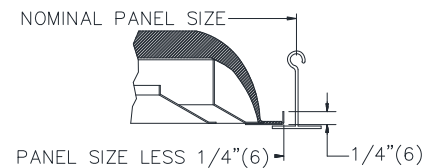


FRAME 24

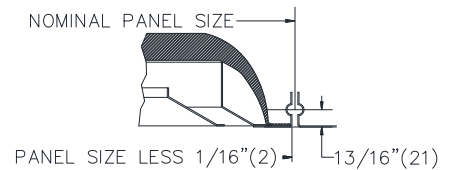

FRAME 27

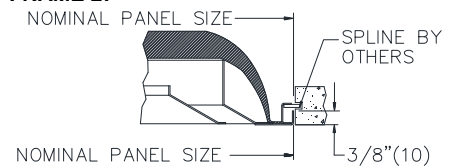

FRAME 98
 24x24 PANEL ONLY

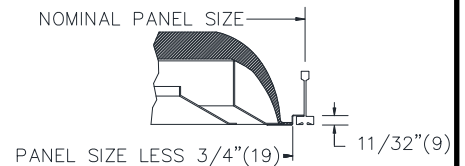

NOTES :

1. **SHR & SHPCR** CONSTRUCTION IS STEEL
2. **5SHR & 5SHPCR** CONSTRUCTION IS ALUMINUM
3. **R6** RIGID FOIL FACED FIBERGLASS INSULATION HAS AN R-VALUE OF 6
4. STANDARD FINISH IS 44 – BRITISH WHITE
5. EQ TABS ARE NOT ACCESSIBLE WITH INSULATION OPTION
6. INSULATION P/N: 800611

ACCESSORIES :

- DAMPERS ARE TO BE ORDERED SEPARATELY

NOMINAL NECK SIZE	A	H
6	5 7/8" (149)	3 1/8" (79)
8	7 7/8" (200)	3 3/8" (86)
10	9 7/8" (251)	3 3/8" (86)
12	11 7/8" (302)	3 3/8" (86)
14	13 7/8" (352)	3 3/8" (86)
16	15 7/8" (403)	3 3/8" (86)