


JOB NAME \_\_\_\_\_  
 ARCHITECT \_\_\_\_\_  
 ENGINEER \_\_\_\_\_  
 CONTRACTOR \_\_\_\_\_  
 LOCATION \_\_\_\_\_

**SUBMITTALSHEET**  
 Form Number: R6010 Effective Date 7/13  
**NEW**




**SERIES SHRV & 5SHRV**  
**24" x 24" SQUARE FACE – ROUND NECK WITH R-6 INSULATION**


**CROSS SECTION**

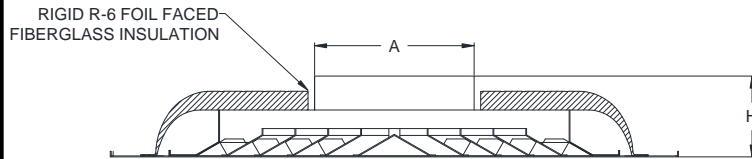


**FRAME 23**

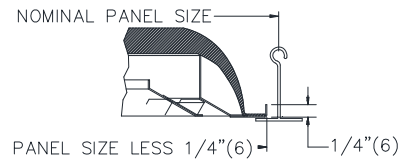


**FACE VIEW**

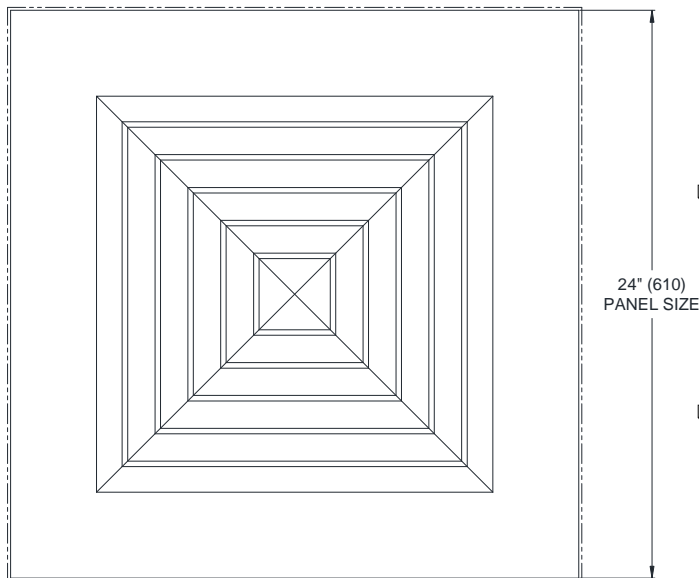


**FRAME 24**

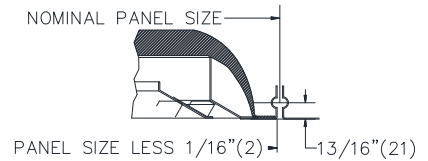

**FRAME 27**

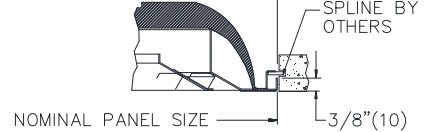

**FRAME 98**

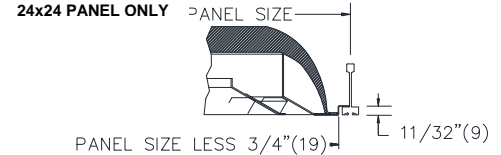

**NOTES :**

1. SHRV CONSTRUCTION IS STEEL
2. 5SHRV CONSTRUCTION IS ALUMINUM
3. R6 RIGID FOIL FACED FIBERGLASS INSULATION HAS AN R-VALUE OF 6
4. STANDARD FINISH IS 44 – BRITISH WHITE
5. EQ TABS ARE NOT ACCESSIBLE WITH INSULATION OPTION
6. INSULATION P/N: 800611

**ACCESSORIES :**

- DAMPERS ARE TO BE ORDERED SEPARATELY

NOMINAL NECK SIZE	A	H
6	5 7/8" (149)	3 1/8" (79)
8	7 7/8" (200)	3 3/8" (86)
10	9 7/8" (251)	3 3/8" (86)
12	11 7/8" (302)	3 3/8" (86)
14	13 7/8" (352)	3 3/8" (86)
16	15 7/8" (403)	3 3/8" (86)