


KSB, KSL - VERTICAL DOWNSIZED BLOWER COIL

ENGINEER CONTRACTOR **TAG**

JOB NAME

COIL CONNECTION LOCATION - 1 & 2 ROW STEAM COIL IN DISCHARGE SECTION

SUBMITTAL SHEET

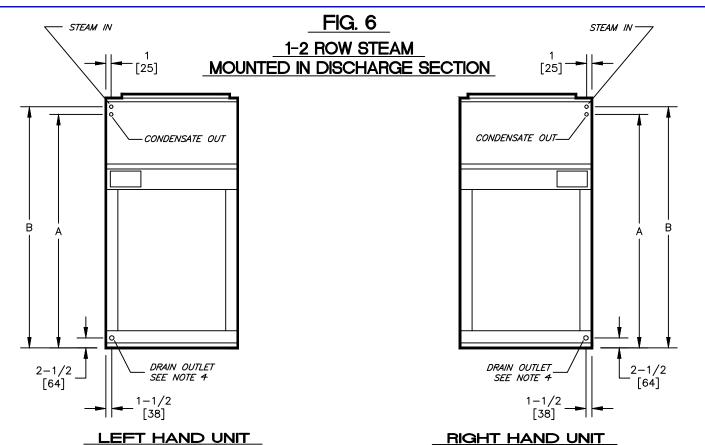

SIZE	1 ROW STEAM COIL				2 ROW STEAM COIL			
	COIL CONNECTION		Α	В	COIL CONNECTION		Α	В
	STEAM	CONDENSATE	,,		STEAM	CONDENSATE	, ,	
08	1-1/8 [29]	7/8 [23]	53-3/4	55-1/8	1-1/8	7/8	53-5/8	55-1/2
12			[1378]	[1400]	[29]	[23]	[1364]	[1410]
16			63-3/4 [1632]	65-1/8 [1654]	1-3/8 [35]	1-1/8 [29]	63-1/2	65-1/2
20	1-3/8 [35] 1-5/8 [41]	1-1/8 [29]	63-1/2 [1613]	65-1/4 [1657]			[1586]	[1664]
25			73-3/8 [1632]	75-1/8 [1908]	1-5/8 [41]		73-1/2	75-1/2
30			73-1/2 [1867]	75-3/8 [1915]			[1867]	[1918]

NOTES:

- ALL DIMENSIONS ARE INCHES [MM]
- 2.
- ALL DIMENSIONS ARE ±1/2" [13]
 METRIC VALUES ARE SOFT CONVERSION 3.
- STANDARD GALVANIZED DRAIN PAN HAS 1-18" ODM COPPER CONNECTION; OPTIONAL STEEL DRAIN PAN HAS 1" GALVANIZED SCH. 40 THREADED STEEL CONNECTION
- DISCHARGE SECTION IS REQUIRED FOR ALL UNITS WITH STEAM HEATING COILS
- 6.
- HEATING ONLY UNITS MAY NOT INCLUDE A DRAIN PAN; SEE ACTUAL ORDER DOCUMENTS
 HEATING COILS IN DISCHARGE SECTION HAVE CONNECTIONS ON SAME SIDE AS COOLING COIL CONNECTIONS
- DIMENSIONS ARE BASED ON UNIT CABINET ONLY, AND DO NOT INCLUDES FILTER RACK OR BASE RAIL 8.

12/14 BCS20-SWC05 NEW Revision Date: Form: Replaces: