
JOB NAME ENGINEER CONTRACTOR TAG	
	SUBMITTAL SHEET

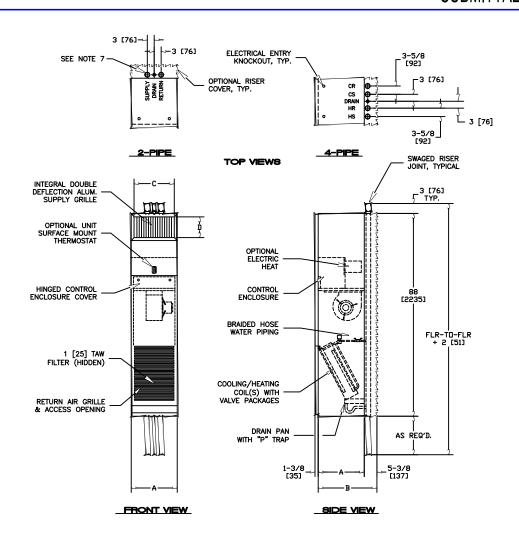

DIMENSIONS - IN [MM]					
UNIT SIZE	А	В	С	D	
03 & 04	18	23-3/8	16	8	
	[457]	[594]	[406]	[203]	
06 & 08	20	25 -3/8	18	12	
	[508]	[645]	[457]	[305]	
10 & 12	24	29-3/8	22	15	
	[610]	[746]	[559]	[356]	

## NOTES:

- ALL DIMENSIONS ARE INCHES [MM]. METRIC VALUES ARE SOFT CONVERSION.
- ALL DIMENSIONS ARE ±1/4 [6MM].
- THERMOSTAT IS SHIPPED LOOSE AND MAY BE UNIT SURFACE MOUNTED OR REMOTE WALL MOUNTED. 3.
- RISERS AVAILABLE FROM 3/4" [19MM] TO 3" [76MM] DIAMETER WITH 1/2" [13MM] THICK INSULATION.
- ALSO AVAILABLE FROM 3/4" [19MM] TO 2-1/2" [64MM] DIAMETER WITH 3/4" [19MM] THICK INSULATION. RISER LENGTH IS 120" [3048MM] MAX, 100" [2540MM] MIN.
- ALL UNITS ARE BACK RISER, FRONT SINGLE SUPPLY, ARGT. BFOO ONLY. 7.
- FACTORY MOUNTED RISERS SHOWN.
- SEE DRAWING "FCS05-KVPE\_KVPP\_KVPS\_01" FOR SHIPPED LOOSE RISER DETAILS.
- 10. STANDARD CABINET FINISH IS "PEARL WHITE SATIN".
- 11. FLOOR AND CEILING TRIM FURNISHED AND INSTALLED BY OTHERS.
- 12. WIRING FROM ELECTRICAL ENTRY POINT TO CONTROL ENCLOSURE IS FURNISHED AND INSTALLED BY OTHERS IN FIELD.

04/15 FCS05-KVPH01 NEW Revision Date: Form: Replaces: